

## ATLAS VETRO

### Version

Island 90 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122304083



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Glass shell**

**Electronic control**

**LED lighting**

**Top filter, removable and washable**

**Charcoal filter included**

## OPTIONAL ACCESSORIES

### KACL.557#I

Extension H1200 - Island

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

## TECHNICAL FEATURES

### Installation type

Island

### Dimensions

90 cm

### Finishing

Scotch brite stainless steel (AISI 304)

Glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 4x1,2 W - 3200 K

### Filter

2 x Metallic filter "Top" - 235x301 mm

### Charcoal filter

Square charcoal filter - Type 3 (included)

### Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

38 kg

### Net weight

33 kg

### Volumes

0.37 m<sup>3</sup>

### Packaging size

Length

1035 mm

Height

480 mm

Depth

740 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

215 W

## ENERGY CLASS

B



## ATLAS VETRO

### Version

Island 90 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122304083

## MOTOR TECHNICAL SHEET

| Motor speed  | 1   | 2   | 3   | 4   |
|--|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 49  | 56  | 62  | 68  |
| Capacity (m <sup>3</sup> /h)<br>I.E.C.61591            | 280 | 370 | 480 | 680 |
| Maximum pressure (Pa)                                  | 390 | 420 | 480 | 500 |
| Motor Power (W)  | 132 | 153 | 175 | 215 |
| Air outlet   | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE



## ATLAS VETRO

### Version

Island 90 cm - 800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122304083

## ENERGY LABEL

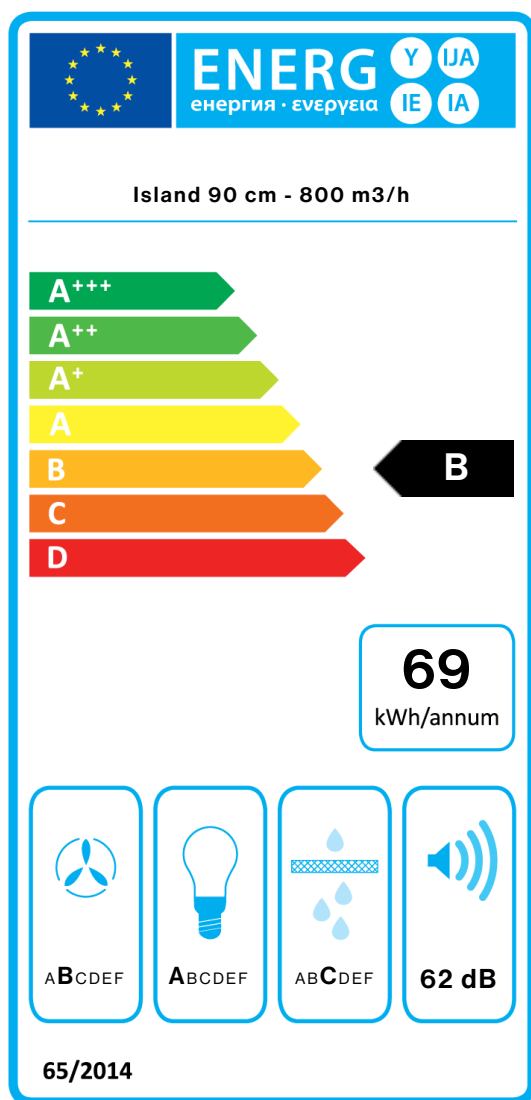

| PF         |                                      |                   |
|------------|--------------------------------------|-------------------|
| S          | Falmec Spa                           |                   |
| M          | Island 90 cm - 800 m <sup>3</sup> /h |                   |
| AEC        | 68,6                                 | kWh/a             |
| EEC        | B                                    |                   |
| FDE        | 26,3                                 |                   |
| FDEC       | B                                    |                   |
| LE         | 28,4                                 |                   |
| LEC        | A                                    |                   |
| GFE        | 79,0                                 |                   |
| GFEC       | C                                    |                   |
| Qmin       | 280,0                                | m <sup>3</sup> /h |
| Qmax       | 480,0                                | m <sup>3</sup> /h |
| Qboost     | 680,0                                | m <sup>3</sup> /h |
| SPEmin     | 49                                   | dBa               |
| SPEmax     | 62                                   | dBa               |
| SPEboost   | 68                                   | dBa               |
| PO         | -                                    | W                 |
| PS         | 0,48                                 | W                 |
| PI         |                                      |                   |
| F          | 1.1                                  |                   |
| EEL        | 65,1                                 |                   |
| Qbep       | 382,0                                | m <sup>3</sup> /h |
| Pbep       | 384                                  | Pa                |
| Qboost     | 680,0                                | m <sup>3</sup> /h |
| Wbep       | 155,1                                | W                 |
| WL         | 8,60                                 | W                 |
| Emiddle    | 245                                  | lex               |
| Lwa-SPEmax | 62                                   | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.