

ECLISSE

Version

Ceiling 120 cm - White

Collection

Design+

EAN code

8034122351483

KACL.782#49F

Slim motor 800 m³/h

Collection

Accessoires

EAN code

8034122708584



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

White tempered glass

Touch control

LED lighting

Metallic grease filter, removable and washable

Remote control included

Painted glossy white steel frame

Cut-out size: 565 x 1218 mm

OPTIONAL ACCESSORIES

KACL.939#BF

Ceiling re-circulation filtering kit (only for Slim Motor)

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

120 cm

Finishing

Painted white steel

White tempered glass

Type of control

Touch control

Speed settings

4

Lighting

Led stripe

Ambient lighting

Led strip

Filter

Metallic filter - Eclisse - 2 pz

Metallic filter - Eclisse

PACKAGING:WEIGHTS AND VOLUMES

ECLISSE

Ceiling 120 cm - White

Gross weight

57.00 kg

Net weight

49.00 kg

Volume

0.31 m³

Packaging size

Length

1350 mm

Height

725 mm

Depth

320 mm

REMOTE MOTOR

Slim motor 800 m³/h

Gross weight

10.00 kg

Net weight

9.00 kg

Volumes

0.04 m³

Packaging size

Length

550 mm

Height

370 mm

Depth

175 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

246 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

490 Pa

Max. motor power

239 W

ENERGY CLASS

D

ECLISSE

KACL.782#49F
Slim motor 800 m³/h

Version

Ceiling 120 cm - White

Collection

Design+

EAN code

8034122351483

Collection

Accessoires


EAN code

8034122708584

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	52	60	65	68
Capacity (m ³ /h) I.E.C.61591 Normalized Pipes	330	470	580	680
Maximum pressure (Pa)	420	460	470	490
Motor Power (W)	158	177	194	239
Air outlet	220x90220x90220x90220x90			

CAPACITY / PRESSURE

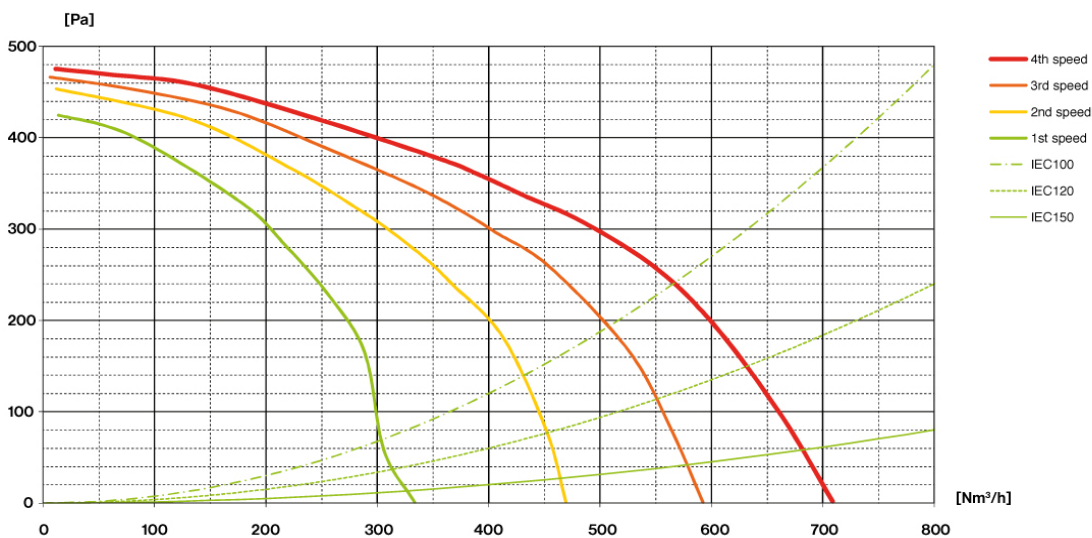

ECLISSE

KACL.782#49F

Slim motor 800 m³/h

Version

Ceiling 120 cm - White

Collection

Design+

EAN code

8034122351483


Collection

Accessoires

EAN code

8034122708584

ENERGY LABEL

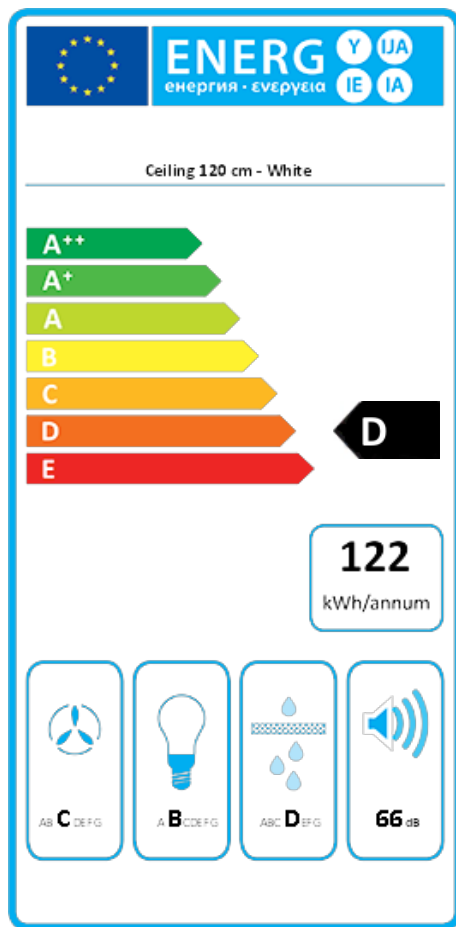

PF		
S	Falmec Spa	
M	Ceiling 120 cm - White	
AEC	122,0	kWh/a
ECC	D	
FDE	20,6	
FDEC	C	
LE	20,1	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	330,0	m ³ /h
Qmax	580,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	54	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,95	W
PI		
F	1,3	
EEl	88,2	
Qbep	363,0	m ³ /h
Pbep	328	Pa
Qboost	680,0	m ³ /h
Wbep	160,5	W
WL	62,20	W
Emiddle	1252	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.