

MIMOSA

Version
Wall 120 cm - Goffered - 450 m3/h

Collection
Classic

EAN code
8034122422008



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Painted steel
- Slider
- Incandescent light
- Metallic grease filter, removable and washable
- Charcoal filter included

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
120 cm
- Finishing**
Painted steel
- Motor**
450 m³/h
- Type of control**
Slider
- Lighting**
Incandescent 2x18 W
- Filter**
3 x Metallic filter "Base" - 235x245 mm
- Charcoal filter**
Round charcoal filter Ø212 mm - Type 2 (included)
- Minimum distance**
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
26 kg
- Net weight**
21 kg
- Volumes**
0.51 m³
- Packaging size**
Length
1310 mm
Height
660 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
300 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
400 m³/h
I.E.C. 61591
- Maximum noise level**
57 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
130 W
- ENERGY CLASS**
D



MIMOSA

Version

Wall 120 cm - Goffered - 450
m3/h

Collection

Classic

EAN code

8034122422008

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	48	53	57
Capacity (m3/h) I.E.C.61591	250	330	400
Maximum pressure (Pa)	270	400	500
Motor Power (W)	70	90	130
Air outlet	120	120	120


MIMOSA

Version
Wall 120 cm - Goffered - 450 m3/h

Collection
Classic

EAN code
8034122422008

ENERGY LABEL

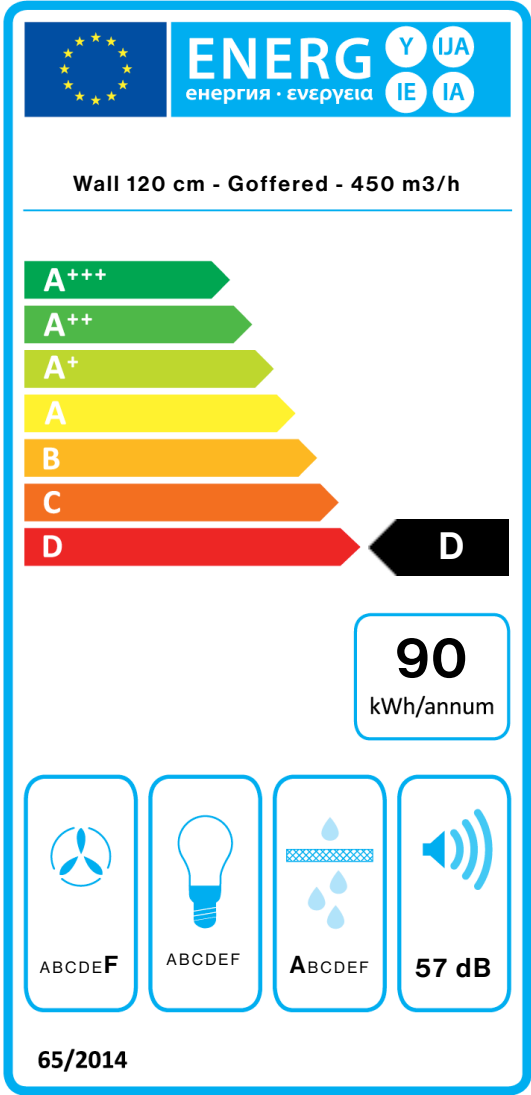

PF		
S	Falmec Spa	
M	Wall 120 cm - Goffered - 450 m3/h	
AEC	89,7	kWh/a
EEC	D	
FDE	7,4	
FDEC	F	
LE	1,7	
LEC	G	
GFE	96,0	
GFEC	A	
Qmin	250,0	m³/h
Qmax	400,0	m³/h
Qboost	400,0	m³/h
SPEmin	48	dBa
SPEmax	57	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1.7	
EEL	98,5	
Qbep	190,0	m³/h
Pbep	140	Pa
Qboost	400,0	m³/h
Wbep	100,0	W
WL	37,90	W
Emiddle	64	lex
Lwa-SPEmax	57	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.