

MIMOSA

Version

Wall 60 cm - Goffered - 600 m³/h

Collection

Classic



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Slider

LED lighting

Metallic grease filter,
removable and washable

Charcoal filter included

OPTIONAL ACCESSORIES

KACL.601#T

Extension Goffered H850 - Wall

TECHNICAL FEATURES

Installation type

Wall

Dimensions

60 cm

Finishing

Painted white goffered steel

Motor

600 m³/h

Type of control

Slider

Speed settings

3

Lighting

Incandescent 2x18 W

Filter

2 x Metallic filter "Base" -
235x245 mm

Charcoal filter

Round charcoal filter Ø212 mm -
Type 2 (included)

Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

18 kg

Net weight

15 kg

Volumes

0.28 m³

Packaging size

Length

710 mm

Height

660 mm

Depth

595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

230 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

480 m³/h

I.E.C. 61591

Maximum noise level

65 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


500 Pa

Max. motor power

180 W

ENERGY CLASS

C



MIMOSA

Version

Wall 60 cm - Goffered - 600
m3/h

Collection

Classic

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

MIMOSA


Version

Wall 60 cm - Goffered - 600 m3/h

Collection

Classic

ENERGY LABEL

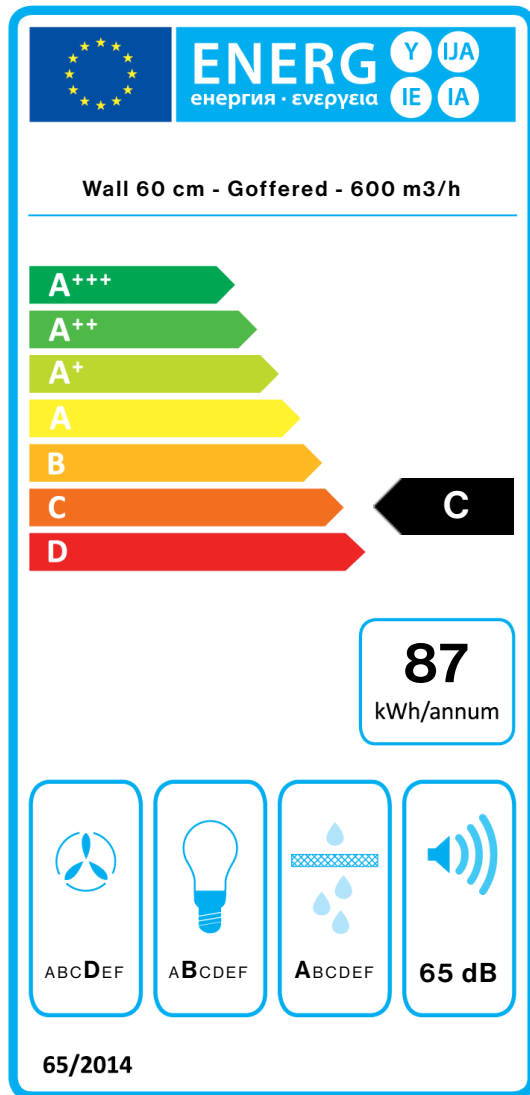

PF		
S	Falmec Spa	
M	Wall 60 cm - Goffered - 600 m3/h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1,4	
EEl	80,6	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.