

## MIMOSA

### Version

Wall 90 cm - Goffered - 600 m<sup>3</sup>/h

### Collection

Classic



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Slider

LED lighting

Metallic grease filter,  
removable and washable

Charcoal filter included

## OPTIONAL ACCESSORIES

**KACL.601#T**

Extension Goffered H850 - Wall

## TECHNICAL FEATURES

**Installation type**

Wall

**Dimensions**

90 cm

**Finishing**

Painted white goffered steel

**Motor**

600 m<sup>3</sup>/h

**Type of control**

Slider

**Speed settings**

3

**Lighting**

Incandescent 2x18 W

**Filter**

2 x Metallic filter "Base" -  
235x245 mm

**Charcoal filter**

Round charcoal filter Ø212 mm -  
Type 2 (included)

**Minimum distance**

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**

22 kg

**Net weight**

18 kg

**Volumes**

0.39 m<sup>3</sup>

**Packaging size**

Length

995 mm

Height

660 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**

230 W

**Voltage**

220-240V

**Frequency**

50-60Hz

**Plug type**

Shuko

## MOTOR TECHNICAL SHEET

**Maximum capacity**

480 m<sup>3</sup>/h

I.E.C. 61591

**Maximum noise level**

65 dB(A)re1pW

I.E.C.60704-2-13

**Maximum pressure (Pa)**


500 Pa

**Max. motor power**

180 W

**ENERGY CLASS**

C



## MIMOSA

### Version

Wall 90 cm - Goffered - 600  
m3/h

### Collection

Classic

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

## MIMOSA


### Version

Wall 90 cm - Goffered - 600 m3/h

### Collection

Classic

## ENERGY LABEL

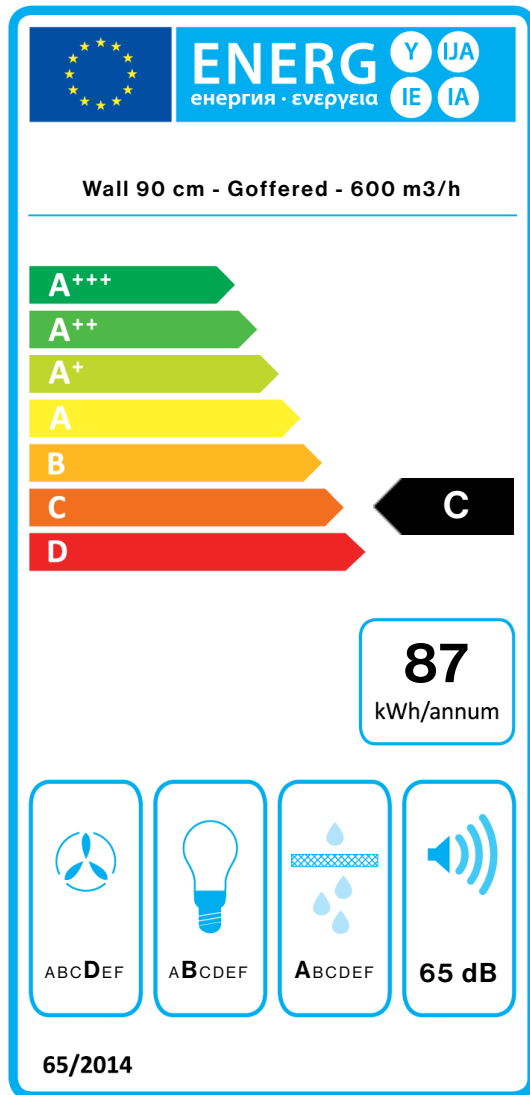

PF		
S	Falmec Spa	
M	Wall 90 cm - Goffered - 600 m3/h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	480,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1,4	
EEl	80,6	
Qbep	303,0	m <sup>3</sup> /h
Pbep	308	Pa
Qboost	480,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lex
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.