

MIRA

Version
Island 40 cm - 600 m3/h

Collection
Design

EAN code
8034122202068



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Scotch brite Fasteel no finger prints
- Perimeter suction
- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Charcoal filter included

TECHNICAL FEATURES

- Installation type**
Island
- Dimensions**
40 cm
- Finishing**
Scotch brite Fasteel no finger prints
- Motor**
600 m³/h
- Type of control**
Electronic control
- Speed settings**
3
- Lighting**
Led 4x1,2 W - 3200 K
- Filter**
Metallic filter "Base" - 235x245 mm
- Charcoal filter**
Round charcoal filter Ø212 mm - Type 2 (included)
- Minimum distance**
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
36 kg
- Net weight**
32 kg
- Volumes**
0.28 m³
- Packaging size**
Length
995 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
480 m³/h
- I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
- I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
180 W
- ENERGY CLASS**
C



MIRA

Version
Island 40 cm - 600 m3/h


Collection
Design

EAN code
8034122202068

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

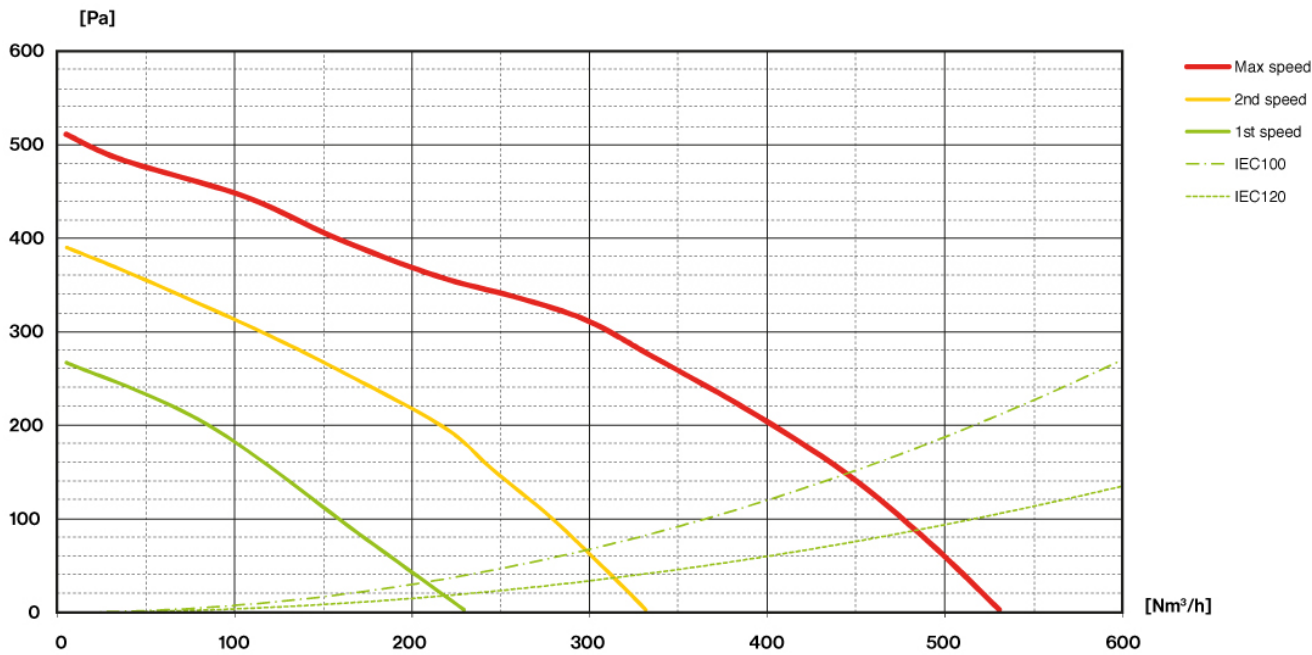


MIRA

Version
Island 40 cm - 600 m3/h

Collection
Design

EAN code
8034122202068

ENERGY LABEL

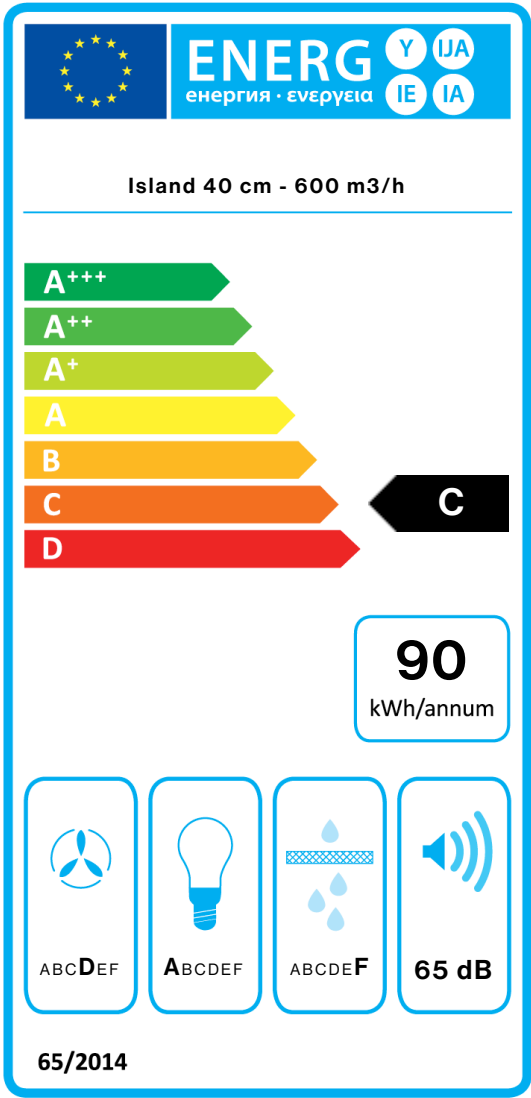

PF		
S	Falmec Spa	
M	Island 40 cm - 600 m3/h	
AEC	90,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEL	81,8	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	8,60	W
Emiddle	245	lex
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.