

MIRA

01MIR-40-F Frithængt 40 cm
Fasteel - 800 m³/h

Sortiment

Design

EAN Kode

8034122202136



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Fasteel, no fingerprints
Kantsug
Elektronisk kontrolpanel
LED lys
Vaskbare rustfrie fedtfiltere
Kulfilter

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT

Loftmotorer under taget 950
m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

KACL.770#41F

Loftmotorer 1100 m³/h
Brushless

TEKNISK BESKRIVELSE

Installation

Frithængt

Dimensioner

40 cm

Materiale

Scotch brite Fasteel ingen
fingeraftryk

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 4x1,2 W - 3200 K

Filter

2 x Metallfiltere - Base - 235x245
mm

Kulfilter

Rundt kulfilter Ø212 mm. Type 2
(Tilvalg)

Minimalsafstand

Gaskomfur: 60 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

36 kg

Nettovægt

32 kg

Volumen

0.28 m³

Mål på emballage

Længde

995 mm

Højde

490 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

590 m³/h

I.E.C. 61591

Maksimalt støjniveau

64 dB(A)_{re1pW}

I.E.C.60704-2-13

Maksimalt tryk (Pa)


500 Pa

Maksimal sugestyrke

203 W

ENERGIKLASSE

B



MIRA

01MIR-40-F Frithængt 40 cm
Fasteel - 800 m³/h

Sortiment

Design


EAN Kode

8034122202136

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	45	50	55	64
Kapacitet (m ³ /h) I.E.C.61591	230	300	380	590
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	203
Luftudtag	150	150	150	150

KAPACITET / TRYK

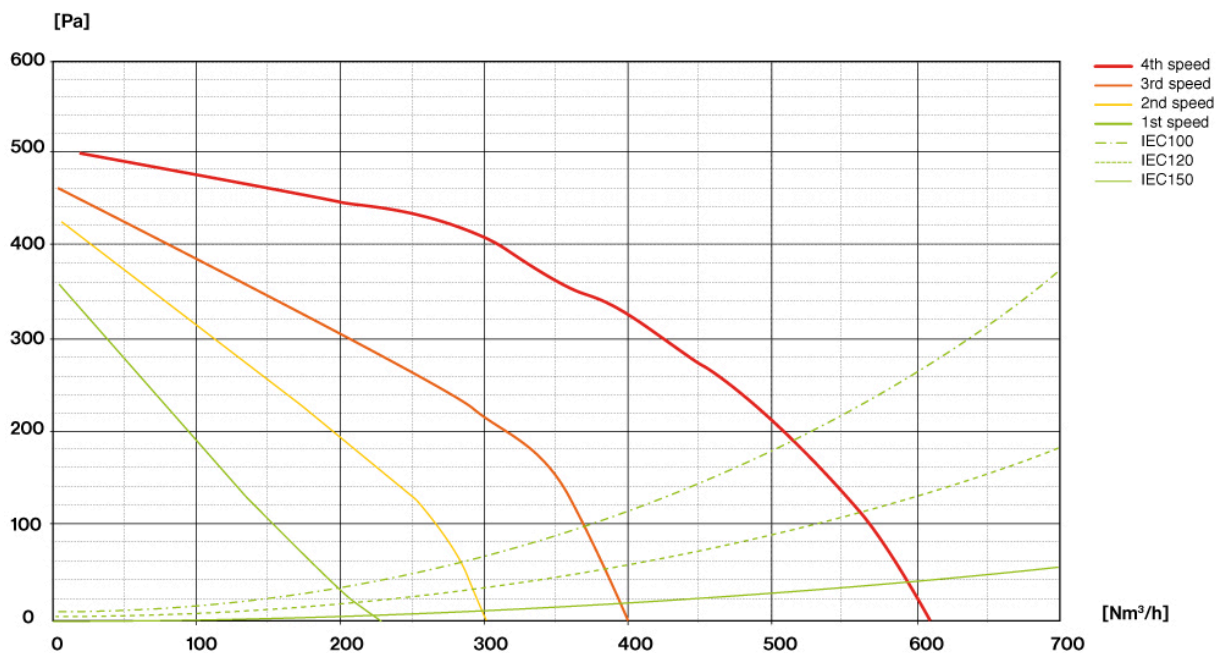

MIRA


01MIR-40-F Frithængt 40 cm
Fasteel - 800 m³/h

Sortiment

Design

EAN Kode

8034122202136

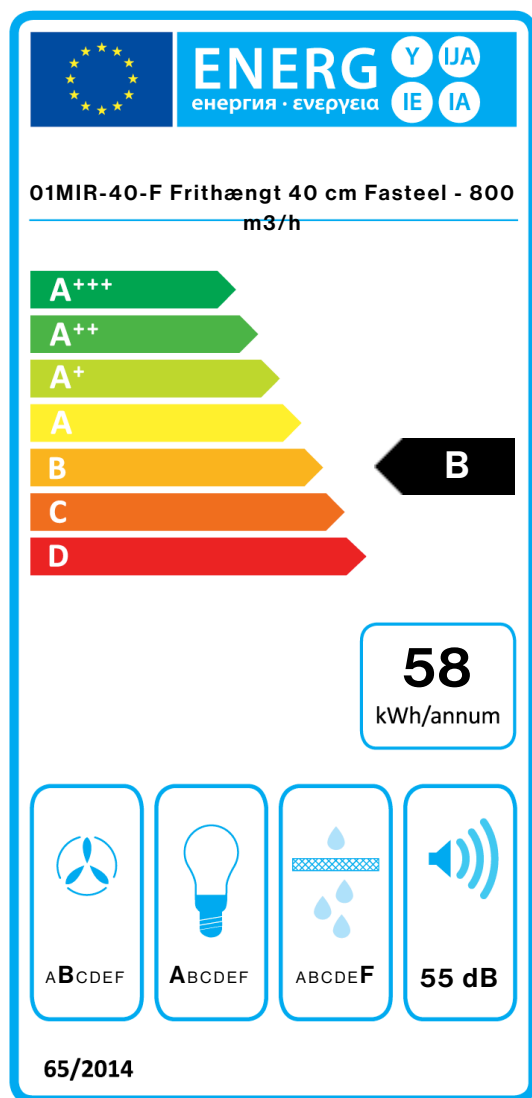

PF		
S	Falmec Spa	
M	01MIR-40-F Frithængt 40 cm Fasteel - 800 m ³ /h	
AEC	58,1	kWh/a
EEC	B	
FDE	25,6	
FDEC	B	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	230,0	m ³ /h
Qmax	380,0	m ³ /h
Qboost	590,0	m ³ /h
SPEmin	45	dBa
SPEmax	55	dBa
SPEboost	64	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	63,8	
Qbep	287,0	m ³ /h
Pbep	415	Pa
Qboost	590,0	m ³ /h
Wbep	129,0	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	55	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.