

## SIRIO

Slimlinemotor 800 m3

### Sortiment

Design+

### EAN Kode

8034122358482

## FUNKTIONER

**Elektronisk kontrolpanel**  
**Vaskbare rustfrie fedtfiltere**  
**Fjernbetjening i tillæg**  
**Dynamic LED Light (2700K - 5600K)**  
**Motor sold separately**

## MULIGHEDER FOR TILVALG

### 01MO-GAVL

Gavlmotor til udendørs brug  
 1000 m3/h

### 01MO-GAVL-15

Gavlmotor til udendørs brug  
 1500 m3/h

### 01MO-LOFT

Loftmotorer under taget 950  
 m3/h

### 01MO-SLIM

Slimlinemotor 800 m3

### KACL.770#41F

Loftmotorer 1100 m3/h  
 Brushless

### KACL.939#BF

Recirkulationskit (01RECIRK) til  
 brug med Slimlinemotor. Til  
 loftseffang.

## TEKNISK BESKRIVELSE

### Installation

Emhætte til loft

### Dimensioner

90 cm

### Materiale

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

Led 4x3,6 W - 2700 K / 5600 K

### Filter

3 x Metallfiltere - Base - 290x326  
 mm

Gaskomfur: 150 cm

Kogeplade: 150 cm



Fotografiet er udelukkende informativt

Korresponderer ikke nødvendigvis tmed den valgte model

## EMBALLAGE: VÆGT OG VOLUMEN

### SIRIO Bruttovægt

31.7 kg

### Nettovægt

27.8 kg

### Volumen

0.21 m<sup>3</sup>

### Mål på emballage

Længde

1330 mm

Højde

215 mm

Dybde

725 mm

### EKSTERN MOTOR

Slimlinemotor 800 m3

### Bruttovægt

6.5 kg

### Nettovægt

5.2 kg

### Volumen

0.04 m<sup>3</sup>

### Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

30 W

### Spænding

220-240V

### Frekvens

50-60Hz

### DATABLAD MOTOR

#### Maksimal kapacitet

550 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)



600 Pa

#### Maksimal sugestyrke

150 W

### ENERGIKLASSE

C



## SIRIO

Slimlinemotor 800 m3

### Sortiment

Design+


### EAN Kode

8034122358482

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Kapacitet (m3/h) I.E.C.61591	285	340	470	550
Maksimalt tryk (Pa)	400	480	500	600
Forbrug (W)	100	110	120	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

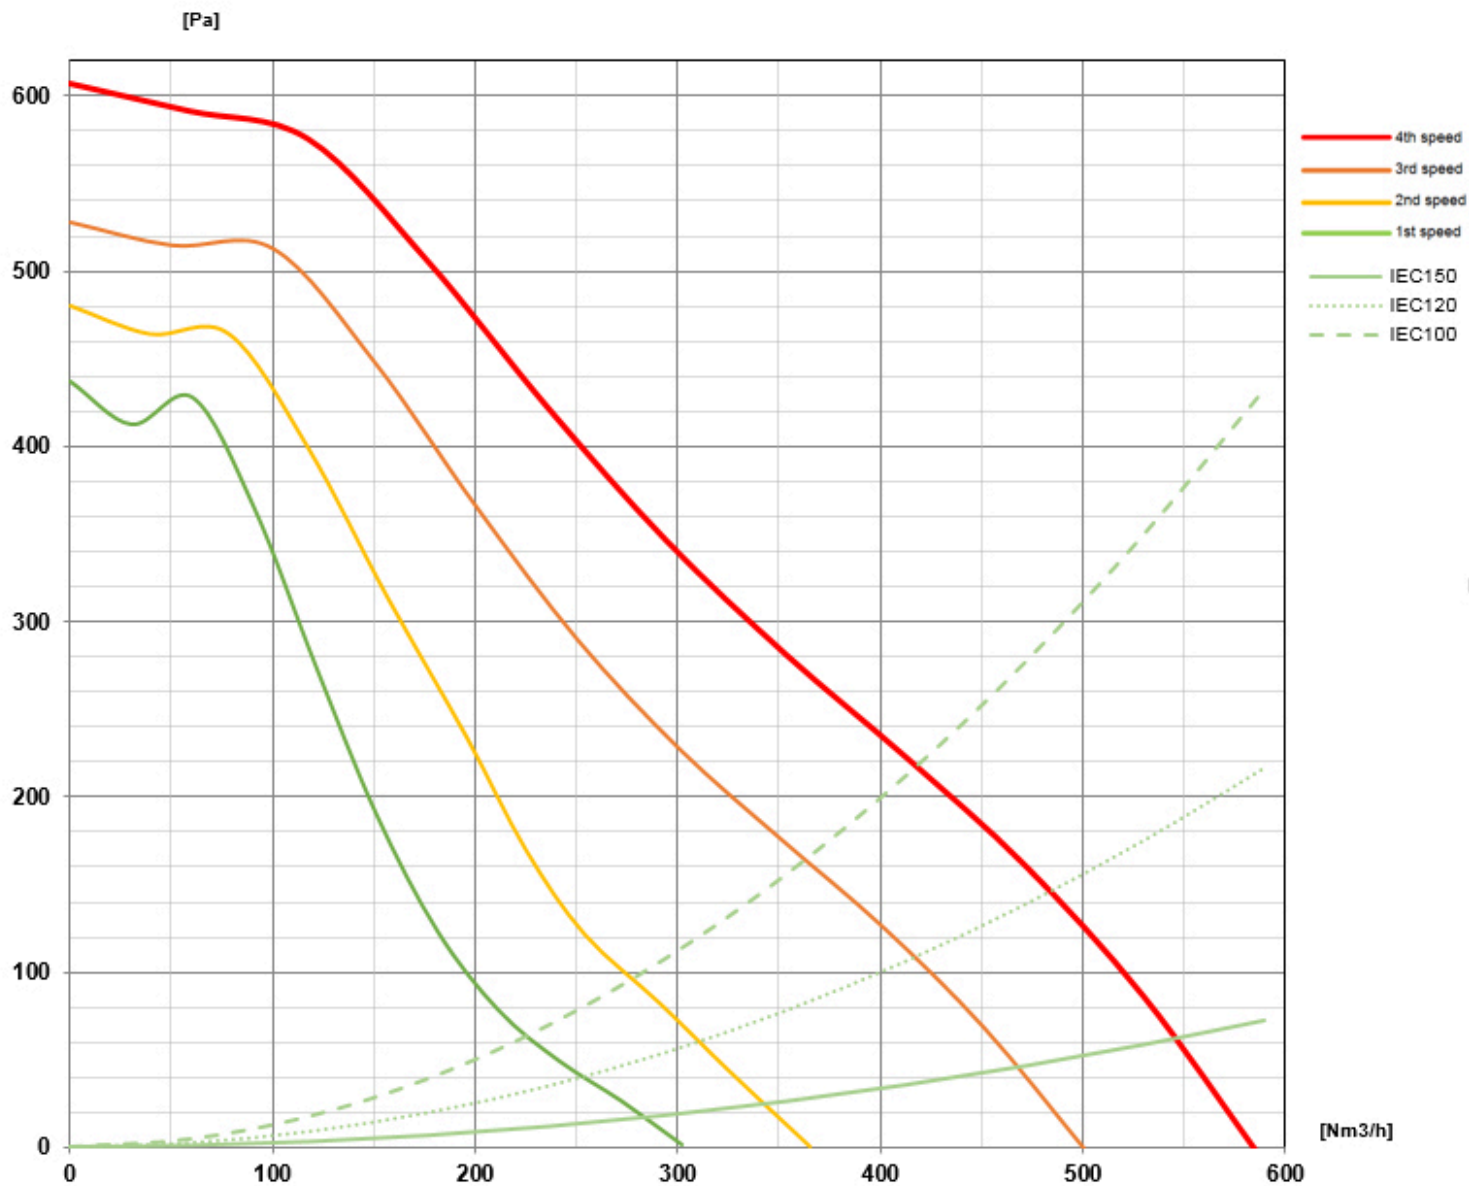

## SIRIO


Slimlinemotor 800 m3

### Sortiment

Design+

### EAN Kode

8034122358482

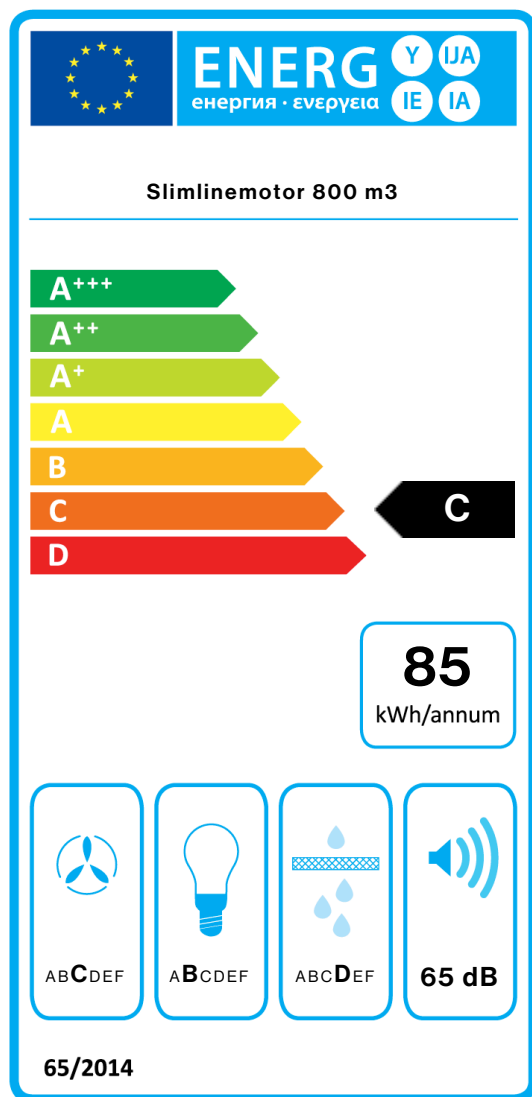

PF		
S	Falmec Spa	
M	Slimlinemotor 800 m3	
AEC	84,8	kWh/a
EEC	C	
FDE	22,6	
FDEC	C	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	330,0	m <sup>3</sup> /h
Qmax	580,0	m <sup>3</sup> /h
Qboost	700,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	65	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,2	
EEL	72,6	
Qbep	488,0	m <sup>3</sup> /h
Pbep	285	Pa
Qboost	700,0	m <sup>3</sup> /h
Wbep	171,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.