

SIRIO

Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122358482

FUNKTIONER

Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltere
Fjernbetjening i tillæg
Dynamic LED Light (2700K - 5600K)
Motor sold separately

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
 1000 m3/h

01MO-GAVL-15

Gavlmotor til udendørs brug
 1500 m3/h

01MO-LOFT

Loftmotorer under taget 950
 m3/h

01MO-SLIM

Slimlinemotor 800 m3

KACL.770#41F

Loftmotorer 1100 m3/h
 Brushless

KACL.939#BF

Recirkulationskit (01RECIRK) til
 brug med Slimlinemotor. Til
 loftseffang.

TEKNISK BESKRIVELSE

Installation

Emhætte til loft

Dimensioner

90 cm

Materiale

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Led 4x3,6 W - 2700 K / 5600 K

Filter

3 x Metallfiltere - Base - 290x326
 mm

Gaskomfur: 150 cm

Kogeplade: 150 cm



Fotografiet er udelukkende informativt

Korresponderer ikke nødvendigvis tmed den valgte model

EMBALLAGE: VÆGT OG VOLUMEN

SIRIO Bruttovægt

31.7 kg

Nettovægt

27.8 kg

Volumen

0.21 m³

Mål på emballage

Længde

1330 mm

Højde

215 mm

Dybde

725 mm

EKSTERN MOTOR

Slimlinemotor 800 m3

Bruttovægt

6.5 kg

Nettovægt

5.2 kg

Volumen

0.04 m³

Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

30 W

Spænding

220-240V

Frekvens

50-60Hz

DATABLAD MOTOR

Maksimal kapacitet

550 m³/h

I.E.C. 61591

Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)



600 Pa

Maksimal sugestyrke

150 W

ENERGIKLASSE

C



SIRIO

Slimlinemotor 800 m3

Sortiment

Design+


EAN Kode

8034122358482

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Kapacitet (m3/h) I.E.C.61591	285	340	470	550
Maksimalt tryk (Pa)	400	480	500	600
Forbrug (W)	100	110	120	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

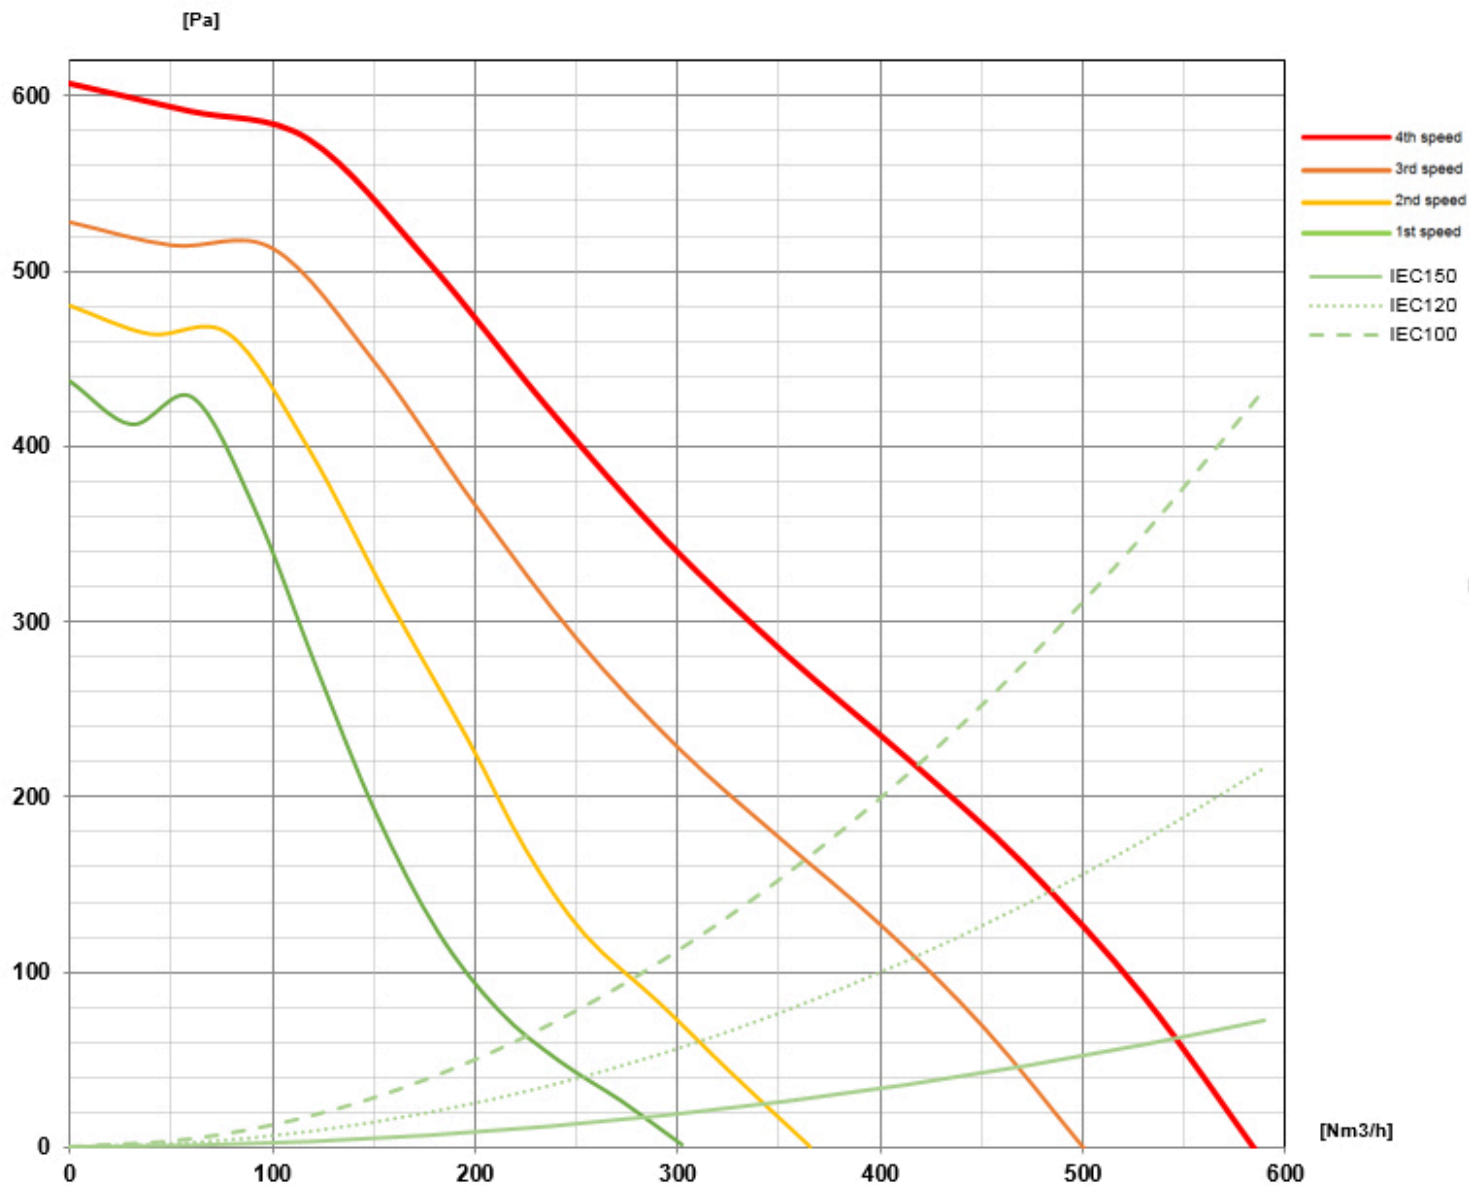

SIRIO


Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122358482

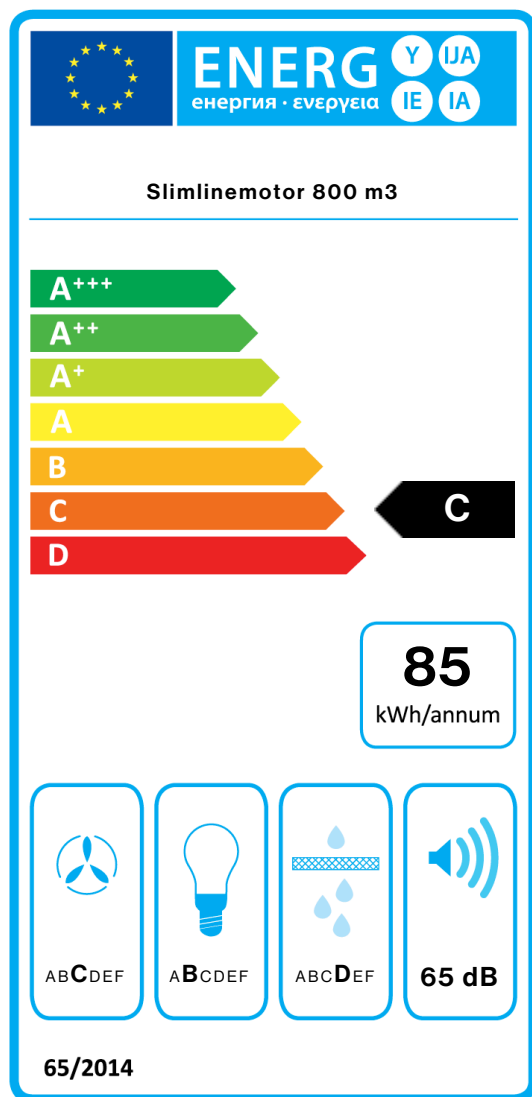

PF		
S	Falmec Spa	
M	Slimlinemotor 800 m3	
AEC	84,8	kWh/a
EEC	C	
FDE	22,6	
FDEC	C	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	330,0	m ³ /h
Qmax	580,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	52	dBa
SPEmax	65	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,2	
EEL	72,6	
Qbep	488,0	m ³ /h
Pbep	285	Pa
Qboost	700,0	m ³ /h
Wbep	171,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.