

SIRIO

Version

Ceiling 90

Collection

Design+

EAN code

8034122358482

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

Collection

Accessoires

EAN code

8034122710211



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

White tempered glass

Electronic control

Remote control included

Dynamic LED Light (2700K - 5600K)

OPTIONAL ACCESSORIES

KACL.782#49F

Slim motor 800 m³/h

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h
Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.939#BF

Ceiling re-circulation filtering kit
(only for Slim Motor)

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

90 cm

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x3,6 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 290x326 mm - 2 pz

PACKAGING:WEIGHTS AND VOLUMES

SIRIO

Ceiling 90

Gross weight

31.70 kg

Net weight

27.80 kg

Volume

0.21 m³

Packaging size

Length

1330 mm

Height

725 mm

Depth

215 mm

REMOTE MOTOR

Remote under-roof 1100 m³/h

Brushless

Gross weight

9.20 kg

Net weight

8.00 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage / Frequency

220-240V

50-60Hz

ENERGY CLASS

A

SIRIO

KACL.770#41F

Version

Ceiling 90

Remote under-roof 1100 m³/h

Brushless

Collection

Accessoires

Collection

Design+


EAN code

8034122710211

EAN code

8034122358482

ENERGY LABEL

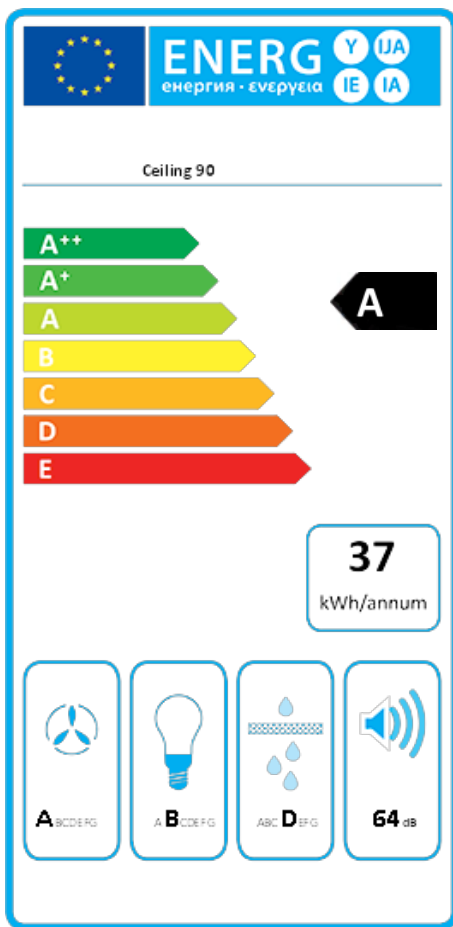

PF		
S	Falmec Spa	
M	Ceiling 90	
AEC	37,2	kWh/a
ECC	A	
FDE	36,9	
FDEC	A	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	350,0	m ³ /h
Qmax	660,0	m ³ /h
Qboost	850,0	m ³ /h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	0,7	
EEl	45,6	
Qbep	405,0	m ³ /h
Pbep	351	Pa
Qboost	850,0	m ³ /h
Wbep	167,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.