

MOVE

Versiune

Incorporat 120 cm - Perete -
800 m³/h

Colectie

Design

Cod EAN

8034122353333



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Usa glisanta

Control electronic

Filtru de grasime metalic,
detasabil si lavabil

Optional - filtru combinat

Carbon.Zeo, regenerabil

Optional - masca pentru
tubulatura

Optional - raft de sticla

Dynamic LED Light (2700K -
5600K)

Control: indicarea comenzilor pe
panoul de comanda frontal
(Panoul de comanda se afla in
partea de sus).
 Availability
Carbon.Zeo filter KACL.961 for
hoods produced from
02/09/2021

ACCESORII OPTIONALE

KACL.108

Sticla raft 120 cm

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

KACL.934

Filtre Carbon.Zeo

KCVJN.00#3

Masca telescopica pentru
tubulatura h 185 + h 185

KCVJN.01#3

Masca pentru tubulatura h 120
mm

CARACTERISTICI TEHNICE

Tip de instalare

Incorporata

Dimensiuni

120 cm

Finisaj

Inox Scotch Brite (AISI 304)

Parte inferioara din sticla tratata
termic culoare alba

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

Led 3x1,2 W - 2700 K / 5600 K

Filtru

4 x Filtru metalic "Base" -
198x161 mm

Filtru de Carbon

Filtre Carbon.Zeo (optional)

Distanta minima

Plita cu gaz: 52 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

24.1 kg

Greutate neta

20 kg

Volum

0.25 m³

Dimensiuni ambalaj

Lungime

1295 mm

Inaltime

410 mm

Adancime

465 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

680 m³/h

I.E.C. 61591

Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor


215 W

CLASA DE ENERGIE


B



Hood and rear view



Optional chimney



Optional shelf

MOVE

Versiune

Incorporat 120 cm - Perete -
800 m³/h

Colectie

Design

Cod EAN

8034122353333

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacitate (m ³ /h) I.E.C.61591	280	370	480	680
Presiune maxima (Pa)	390	420	480	500
Putere motor (W)	132	153	175	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE



MOVE

Versiune

Incorporat 120 cm - Perete -
800 m³/h


Colectie

Design

Cod EAN

8034122353333

ETICHETA DE ENERGIE

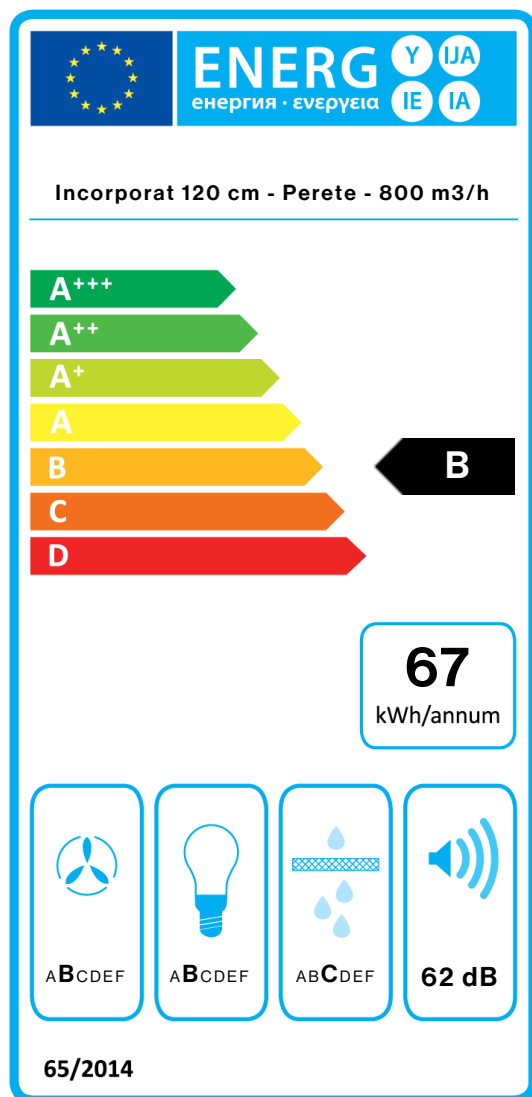

PF		
S	Falmec Spa	
M	Incorporat 120 cm - Perete - 800 m ³ /h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,7	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,3	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	6,50	W
Emiddle	134	lex
Lwa-SPEmax	62	dBa