

## MOVE

01MOVE-60-H Indbygning 60 cm - Hvidt glas - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122352152



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

**Skydedør**  
**Elektronisk kontrolpanel**  
**Vaskbare rustfrie fedtfilter**  
**Skorsten medfølger ved aftræk**  
**Tilvalg glashylde**  
**Dæmpbart LED-lys**  
**Dynamic LED Light (2700K - 5600K)**  
**Carbon.Zeo Microtech filter (optional)**

Availability Carbon.Zeo filter  
KACL.961 for hoods produced  
from 01.29.2021.

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

Dimmable led lighting from  
11.07.23

## MULIGHEDER FOR TILVALG

### 07MAGIC

Beskyttende rensklude til  
rustfrit stål. Kasse med 10 klude

### KACL.1039

Carbon.Zeo Microtech filter

### KACL.106

Glass shelf 60 cm

### KCVJN.00#3

Telescopic chimney h 185 + h 185  
- Virgola/Move

### KCVJN.01#3

Kit Chimney Virgola-Move H120  
Stainless Steel

## TEKNISK BESKRIVELSE

**Installation**  
Integreret emhætte

**Dimensioner**  
60 cm

**Materiale**  
Scotch brite rustfrit stål (AISI 304)  
Nederste del i hvidt tempereret glas

**Motor**  
800 m<sup>3</sup>/h

**Betjening**  
Elektronisk kontrolpanel

**Hastighed**  
3 + boost

**Belysning**  
Led 2x1,2 W - 2700 K / 5600 K

**Filter**  
2 x Metallfilter - Base - 198x161 mm

**Kulfilter**  
Carbon.Zeo Microtech filter (Tilvalg)

**Minimumsafstand**  
Gaskomfur: 52 cm  
Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
16 kg

**Nettovægt**  
13.3 kg

**Volumen**  
0.13 m<sup>3</sup>

**Mål på emballage**

Længde  
705 mm

Højde  
410 mm

Dybde  
465 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
280 W

**Spænding**  
220-240V

**Frekvens**  
50-60Hz

Shuko

## DATABLAD MOTOR


**Maksimal kapacitet**  
680 m<sup>3</sup>/h  
I.E.C. 61591

**Maksimalt støjniveau**  
68 dB(A)re1pW  
I.E.C.60704-2-13


**Maksimalt tryk (Pa)**  
500 Pa

**Maksimal sugestyrke**  
215 W


**ENERGIKLASSE**  
B

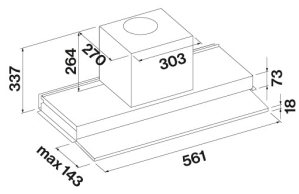

Hood



Optional chimney

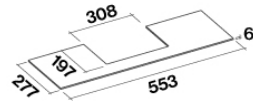

Optional shelf

## MOVE

01MOVE-60-H Indbygning 60  
cm - Hvidt glas - 800 m<sup>3</sup>/h

### Sortiment

Design


### EAN Kode

8034122352152

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	270	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

## KAPACITET / TRYK

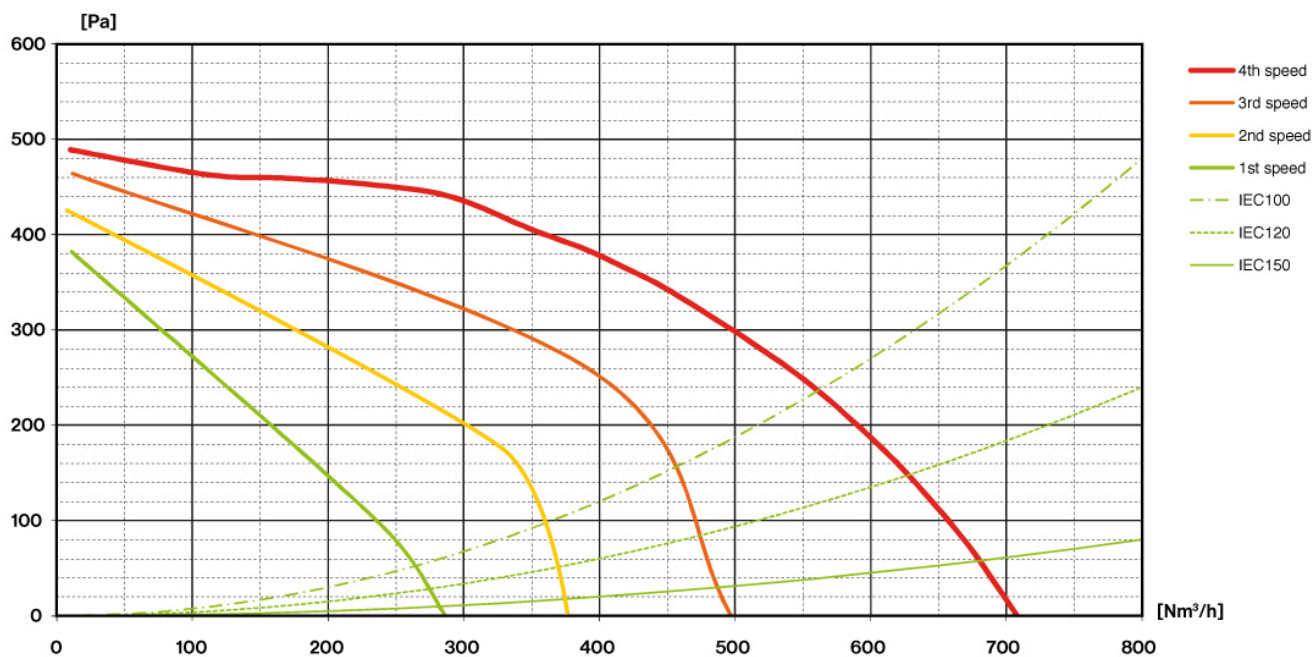

## MOVE


01MOVE-60-H Indbygning 60  
cm - Hvidt glas - 800 m3/h

### Sortiment

Design

### EAN Kode

8034122352152

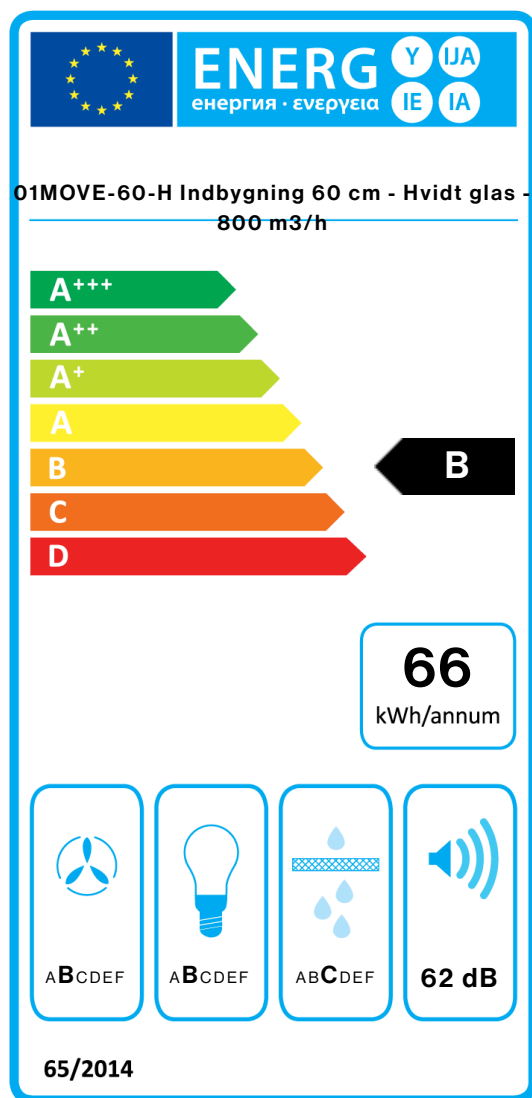

PF		
S	Falmec Spa	
M	01MOVE-60-H Indbygning 60 cm - Hvidt glas - 800 m3/h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.