

## MOVE

### Versiune

Incorporat 60 cm - Alb - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122352152



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

**Usa glisanta**  
**Control electronic**  
**Filtru de grasime metalic, detasabil si lavabil**  
**Optional - filtru combinat Carbon.Zeo, regenerabil**  
**Optional - masca pentru tubulatura**  
**Optional - raft de sticla**  
**Dynamic LED Light (2700K - 5600K)**

Control: indicarea comenzilor pe panoul de comanda frontal (Panoul de comanda se afla in partea de sus).<br /> Availability  
Carbon.Zeo filter KACL.961 for hoods produced from  
01/29/2021

## ACCESORII OPTIONALE

### KACL.106

Sticla raft 60 cm

### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h

### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### KACL.815

Lavete pentru curatare inox  
(cutie 10 buc)

### KACL.934

Filtre Carbon.Zeo

### KCVJN.00#3

Masca telescopica pentru tubulatura h 185 + h 185

### KCVJN.01#3

Masca pentru tubulatura h 120 mm

## CARACTERISTICI TEHNICE

**Tip de instalare**  
Incorporata  
**Dimensiuni**  
60 cm  
**Finisaj**  
Inox Scotch Brite (AISI 304)  
Parte inferioara din sticla tratata termic culoare alba  
**Motor**  
800 m<sup>3</sup>/h  
**Tipul panoului de control**  
Control electronic  
**Setari de viteza**  
4  
**Iluminare**  
Led 2x1,2 W - 2700 K / 5600 K  
**Filtru**  
2 x Filtru metalic "Base" - 198x161 mm  
**Filtru de Carbon**  
Filtre Carbon.Zeo (optional)  
**Distanta minima**  
Plita cu gaz: 52 cm  
Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

### Greutate bruta

16 kg

### Greutate neta

13.3 kg

### Volum

0.13 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

705 mm

Inaltime

410 mm

Adancime

465 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

280 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

680 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)


500 Pa

### Putere maxima motor


215 W

## CLASA DE ENERGIE


B



Hood



Optional chimney



Optional shelf

## MOVE

### Versiune

Incorporat 60 cm - Alb - 800  
m<sup>3</sup>/h

### Colectie

Design


### Cod EAN

8034122352152

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacitate (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Presiune maxima (Pa)	390	420	480	500
Putere motor (W)	132	153	175	215
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE

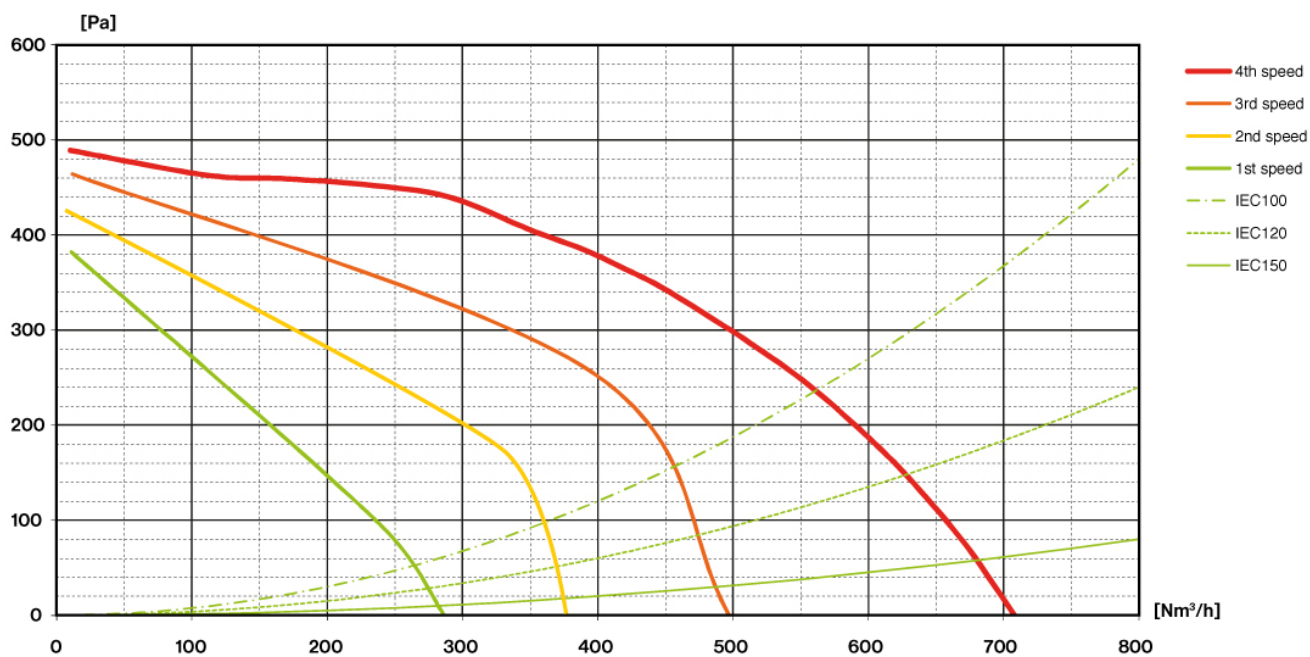

## MOVE

### Versiune

Incorporat 60 cm - Alb - 800  
m3/h


### Colectie

Design

### Cod EAN

8034122352152

## ETICHETA DE ENERGIE

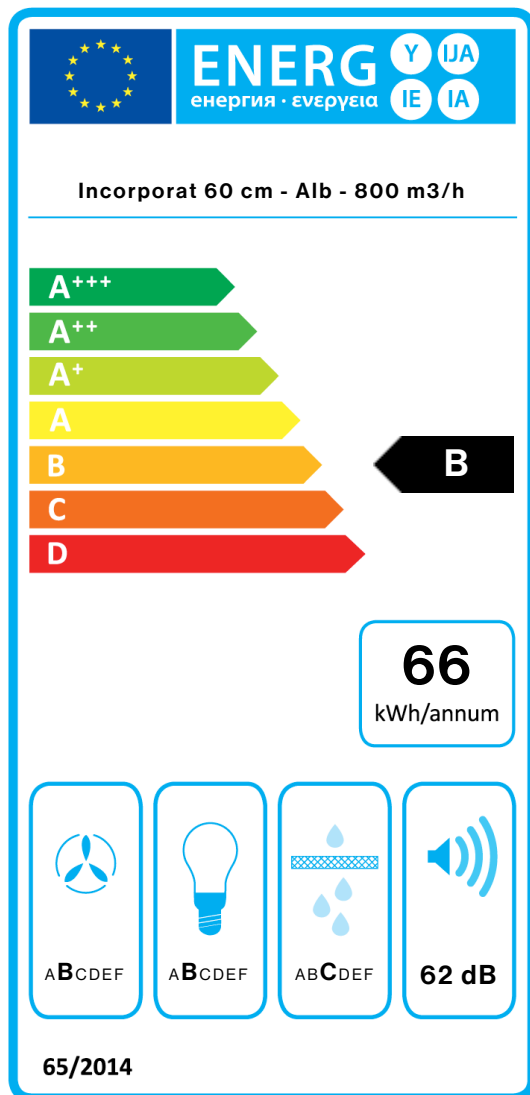

PF		
S	Falmec Spa	
M	Incorporat 60 cm - Alb - 800 m3/h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	62	dBa