

## MOVE

### Version

Built-in 60 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122352169



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

**Sliding door**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Optional combined regenaleble Carbon.Zeo filter**  
**Optional Chimney**  
**Optional glass shelf**  
**Dynamic LED Light (2700K - 5600K)**

Control: indication of controls on the frontal panel ( The control is in the upper side).<br />

Availability Carbon.Zeo filter KACL.961 for hoods produced from 01/29/2021

## OPTIONAL ACCESSORIES

### KACL.106

Glass shelf 60 cm

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.934

Carbon.Zeo filters

### KACL.961

Charcoal and Zeolite filter

### KCVJN.00#N

KIT CHIMNEY VIRGOLA-MOVE  
H=185 + PROL. H=185  
(W/Packaging) BLACK

### KCVJN.01#N

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

60 cm

### Finishing

Scotch brite stainless steel (AISI 304)

Lower part in black tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 2700 K / 5600 K

### Filter

2 x Metallic filter "Base" - 198x161 mm

### Charcoal filter

Charcoal and Zeolite filter (optional)

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

16 kg

### Net weight

13.3 kg

### Volumes

0.13 m<sup>3</sup>

### Packaging size

Length

705 mm

Height

410 mm

Depth

465 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

500 Pa


### Max. motor power

215 W


## ENERGY CLASS

B


KIT CHIMNEY VIRGOLA-MOVE  
H=120 (W/Packaging) BLACK



*Hood*



*Optional chimney*



*Optional shelf*

## MOVE

### Version

Built-in 60 cm - Black - 800  
m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122352169

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Capacity (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE



## MOVE

### Version

Built-in 60 cm - Black - 800 m3/h


### Collection

Design

### EAN code

8034122352169

## ENERGY LABEL

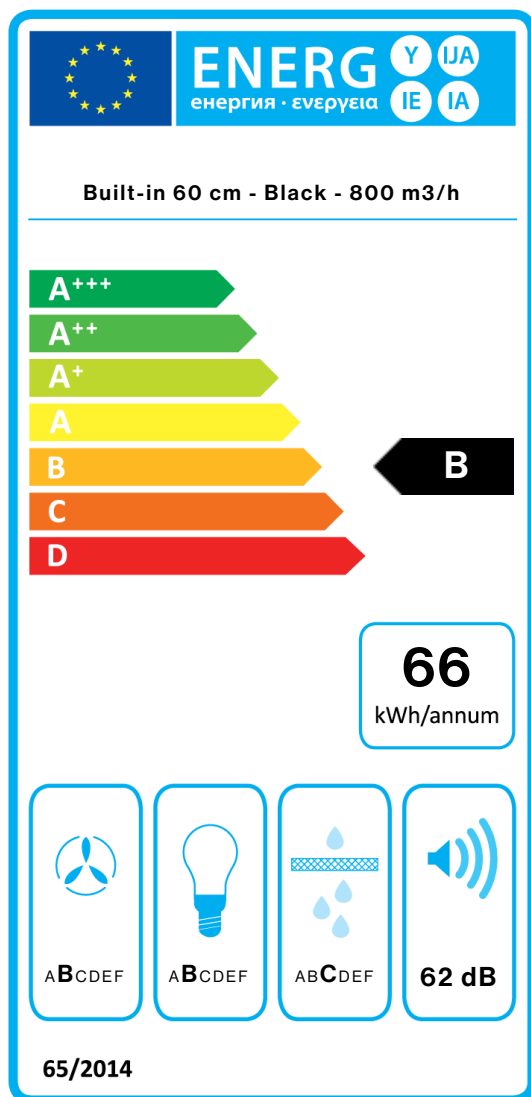

PF		
S	Falmec Spa	
M	Built-in 60 cm - Black - 800 m3/h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.