

MOVE

01MOVE-90-H Indbygning 90
cm - Hvidt glas - 800 m³/h

Sortiment

Design

EAN Kode

8034122352176



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Skydedør
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfilter
Skorsten medfølger ved aftræk
Tilvalg glashylde
Dæmpbart LED-lys
**Dynamic LED Light (2700K -
5600K)**
Carbon.Zeo Microtech filter
(optional)

Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 02.05.2021.

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

Dimmable led lighting from
11.07.23

MULIGHEDER FOR TILVALG

07MAGIC

Beskyttende rensklude til
rustfrit stål. Kasse med 10 klude

KACL.1039

Carbon.Zeo Microtech filter

KACL.107

Glass shelf 90 cm

KCVJN.00#3

Telescopic chimney h 185 + h 185
- Virgola/Move

KCVJN.01#3

Kit Chimney Virgola-Move H120
Stainless Steel

TEKNISK BESKRIVELSE

Installation
Integreret emhætte

Dimensioner
90 cm

Materiale
Scotch brite rustfrit stål (AISI
304)

Nederste del i hvidt tempereret
glas

Motor
800 m³/h

Betjening
Elektronisk kontrolpanel

Hastighed
3 + boost

Belysning
Led 3x1,2 W - 2700 K / 5600 K

Filter
3 x Metallfilter - Base - 198x161
mm

Kulfilter
Carbon.Zeo Microtech filter
(Tilvalg)

Minimumsafstand
Gaskomfur: 52 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
20.2 kg

Nettovægt
16.8 kg

Volumen
0.19 m³

Mål på emballage

Længde
995 mm

Højde
410 mm

Dybde
465 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
280 W

Spænding
220-240V

Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
680 m³/h

I.E.C. 61591


Maksimalt støjniveau
68 dB(A)_{re1pW}

I.E.C.60704-2-13


Maksimalt tryk (Pa)
500 Pa

Maksimal sugestyrke
215 W


ENERGIKLASSE
B



Hood and rear view



Optional chimney



Optional shelf

MOVE

01MOVE-90-H Indbygning 90
cm - Hvidt glas - 800 m³/h

Sortiment

Design


EAN Kode

8034122352176

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Kapacitet (m ³ /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

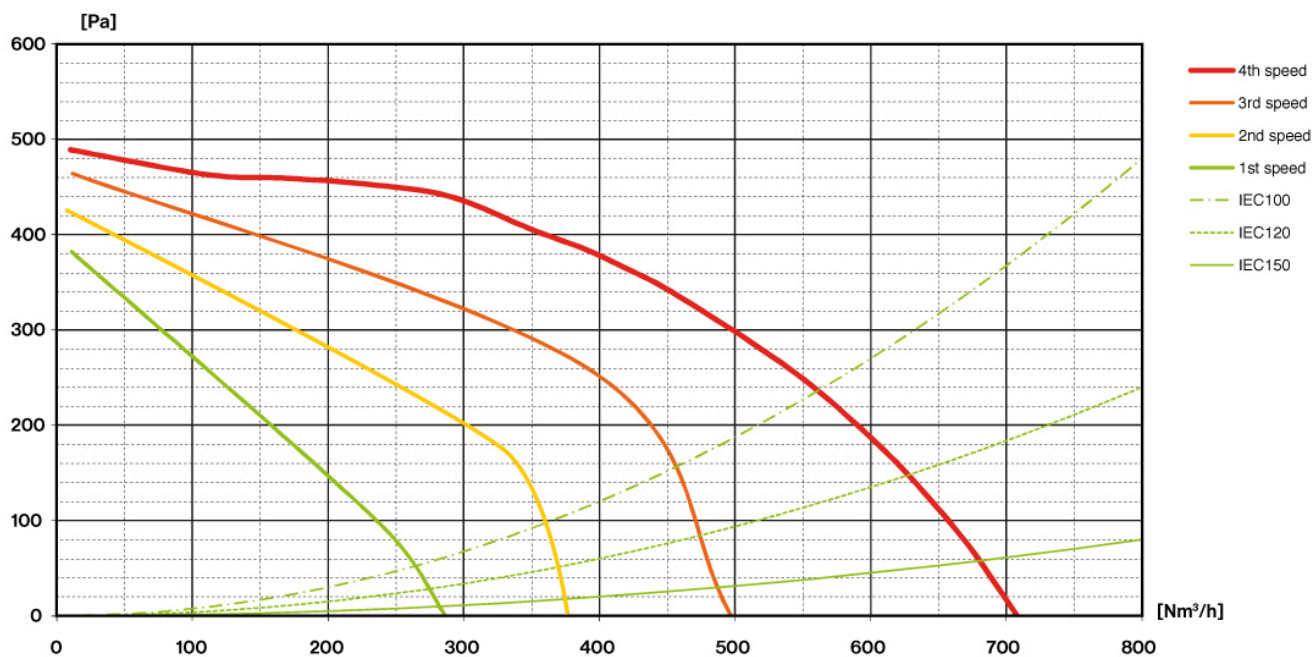

MOVE


01MOVE-90-H Indbygning 90
cm - Hvidt glas - 800 m3/h

Sortiment

Design

EAN Kode

8034122352176

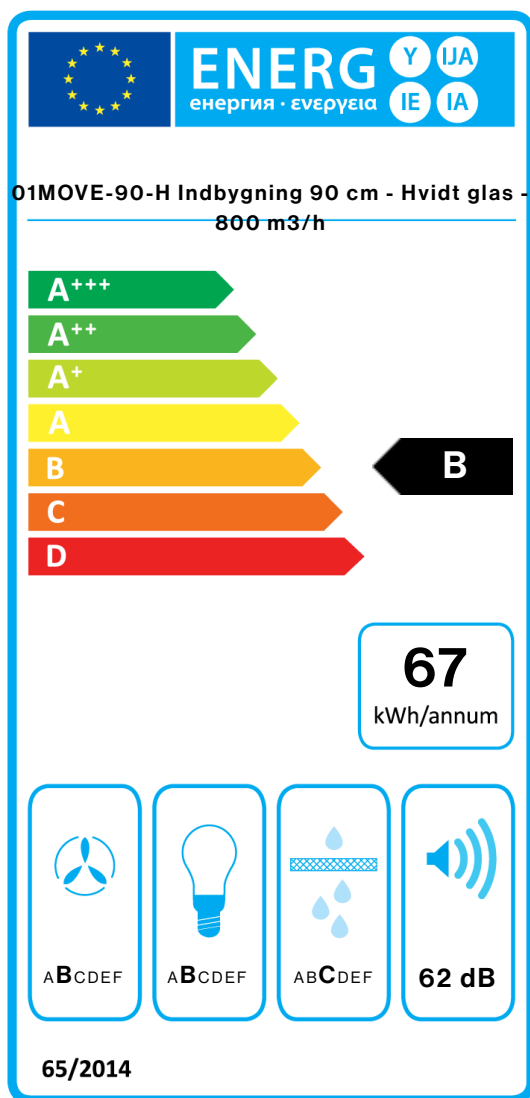

PF		
S	Falmec Spa	
M	01MOVE-90-H Indbygning 90 cm - Hvidt glas - 800 m3/h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,7	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	64,3	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	6,50	W
Emiddle	134	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.