

NOVA

Version

Remote under-roof 1100 m³/h
Brushless

Collection

Design+

EAN code

8034122358963



FEATURES

- Perimeter suction
- Electronic control
- LED ambient light
- Metallic grease filter, removable and washable
- Remote control included

OPTIONAL ACCESSORIES

KACL.782#49F

Slim motor 800 m3/h

KACL.798#41F

Remote under-roof motor 950 m3/h

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

82 cm

Finishing

Painted white steel

Type of control

Electronic control

Ambient lighting

Ambient led

PACKAGING:WEIGHTS AND VOLUMES

NOVA Gross weight

30 kg

Net weight

24.5 kg

Volumes

0.25 m³

Packaging size

Length

1030 mm

Height

250 mm

Depth

975 mm

REMOTE MOTOR Remote under-roof 1100 m³/h

Brushless Gross weight

9.2 kg

Net weight

8 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

30 W

Voltage


220-240V

Frequency

50-60Hz

ENERGY CLASS

B




NOVA

Version
Remote under-roof 1100 m³/h
Brushless

Collection
Design+

EAN code
8034122358963

ENERGY LABEL

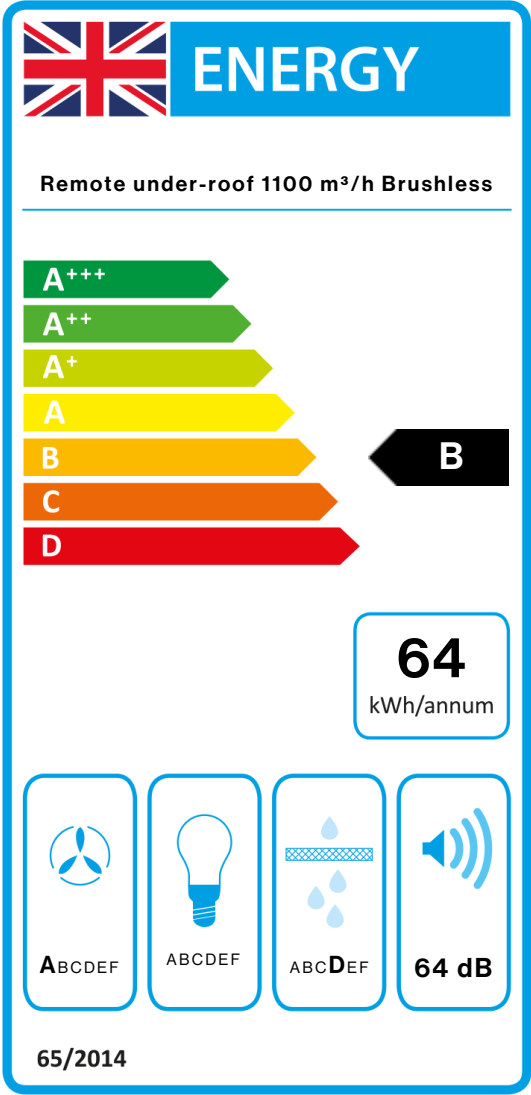

PF		
S	Falmec Spa	
M	Remote under-roof 1100 m³/h Brushless	
AEC	63,7	kWh/a
EEC	B	
FDE	36,1	
FDEC	A	
LE	0,8	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	350,0	m³/h
Qmax	660,0	m³/h
Qboost	880,0	m³/h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	0.7	
EEL	58,8	
Qbep	370,0	m³/h
Pbep	443	Pa
Qboost	880,0	m³/h
Wbep	126,0	W
WL	43,00	W
Emiddle	0	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.