falmec

NUBE

Slimlinemotor 800 m3

Sortiment
Design+

EAN Kode
8034122358895

FUNKTIONER

Kantsug
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltre
Fjernbetjening i tillæg
Mulighed for Connection kogeplade

MULIGHEDER FOR TILVALG

01MO-GAVL
Gavlmotor til udendørs brug 1000 m3/h
01MO-GAVL-15
Gavlmotor til udendørs brug 1500 m3/h
01MO-LOFT
Loftmotorer under taget 950 m3/h
01MO-LOFT-13
Loftmotor 1300 m3 Ø200 mm
01MO-SLIM
Slimlinemotor 800 m3
KACL.1049
Carbon.Zeo Microtech regenererbart filter til loftsemhætter op til 100 cm
KACL.770#41F
Loftmotorer 1100 m3/h Brushless
KACL.939#BF
Recirkulationskit (01RECIRK) til brug med Slimlinemotor. Til loftsemfang.

TEKNISK BESKRIVELSE

Installation
Emhætte til loft
Dimensioner
90 cm
Materiale
Hvidlakeret stål
Betjening
Elektronisk kontrolpanel
Hastighed
3 + boost
Belysning
No lighting
Filter
3 x Metallfiltre - Base - 290x267 mm

Gaskomfur: 150 cm
Kogeplade: 150 cm

EMBALLAGE: VÆGT OG VOLUMEN

NUBE Bruttovægt
23.3 kg
Nettovægt
20.5 kg
Volumen
0.14 m³
Mål på emballage
Længde
1120 mm
Højde
190 mm
Dybde
670 mm
EKSTERN MOTOR
Slimlinemotor 800 m3
Bruttovægt
6.5 kg
Nettovægt
5.2 kg
Volumen
0.04 m³
Mål på emballage
Længde
575 mm
Højde
195 mm
Dybde
395 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Spænding
220-240V
Frekvens
50-60Hz

DATABLAD MOTOR

Maksimal kapacitet
550 m³/h
I.E.C. 61591
Maksimalt støjniveau
66 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
600 Pa
Maksimal sugestyrke
150 W
ENERGIKLASSE
B



Hood and motor dimensions

falmec

NUBE

Slimlinemotor 800 m3

Sortiment
Design+

EAN Kode
8034122358895

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Kapacitet (m3/h) I.E.C.61591	285	340	470	550
Maksimalt tryk (Pa)	400	480	500	600
Forbrug (W)	100	110	120	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

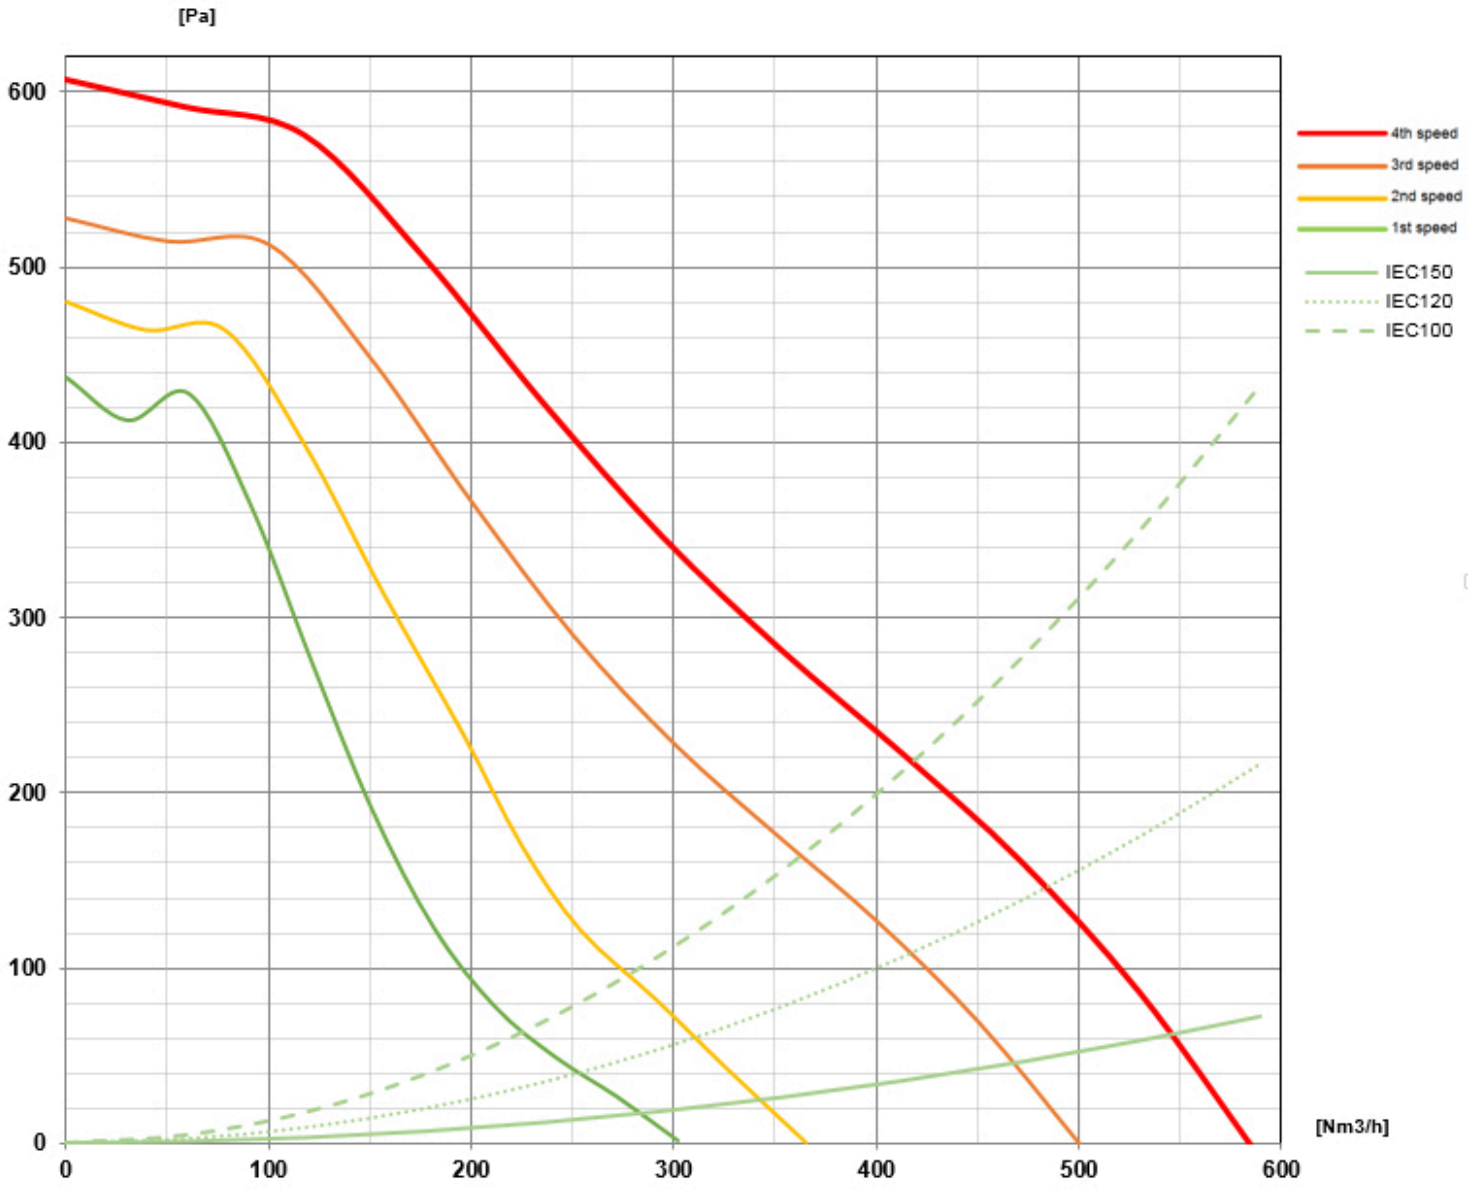

falmec

NUBE

Slimlinemotor 800 m3

Sortiment
Design+

EAN Kode
8034122358895

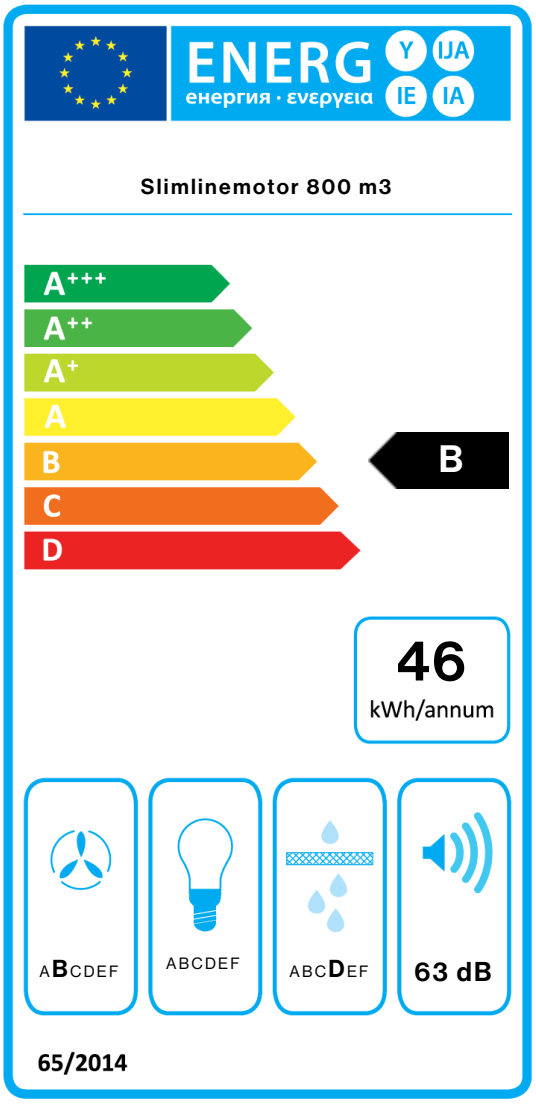

PF		
S	Falmec Spa	
M	Slimlinemotor 800 m3	
AEC	46,2	kWh/a
EEC	B	
FDE	24,3	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	285,0	m³/h
Qmax	470,0	m³/h
Qboost	550,0	m³/h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	58,8	
Qbep	337,0	m³/h
Pbep	298	Pa
Qboost	550,0	m³/h
Wbep	115,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.