

NUBE

Version
Slim motor 800 m³/h

Collection
DESIGNER SERIES - Design+

EAN code
8034122358895

FEATURES

Perimeter suction
Electronic controls
Metallic grease filter,
removable and washable
Remote control included

OPTIONAL ACCESSORIES

EW1300
Remote under-roof motor 1300 m3/h
EW1500
Outdoor extractor fan 1500 m3/h
IN950
Remote under-roof motor 950 m3/h
KACL.770#41F
Remote under-roof 1100 m3/h Brushless
KACL.782#49F
Slim motor 800 m3/h
KACL.786#41F
Outdoor extractor fan 1000 m3/h
KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)

TECHNICAL FEATURES

Installation type
Ceiling
Dimensions
90 cm
Finishing
Painted white steel
Type of control
Electronic controls
Speed settings
4
Lighting
No lighting
Filter
3 x Metallic filter "Base" - 290x267 mm
Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES


NUBE Gross weight
23.3 kg
Net weight
20.5 kg
Volumes
0.14 m³
Packaging size
Length
1120 mm
Height
190 mm
Depth
670 mm
REMOTE MOTOR Slim motor 800 m³/h Gross weight
6.5 kg
Net weight
5.2 kg
Volumes
0.04 m³
Packaging size
Length
575 mm
Height
195 mm
Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
550 m³/h
I.E.C. 61591
Maximum sound level
66 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
600 Pa
Maximum motor power
150 W
ENERGY CLASS
B



NUBE


Version
Slim motor 800 m³/h

Collection
DESIGNER SERIES - Design+

EAN code
8034122358895

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Sound level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m3/h) I.E.C.61591	285	340	470	550
Maximum pressure (Pa)	400	480	500	600
Motor Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

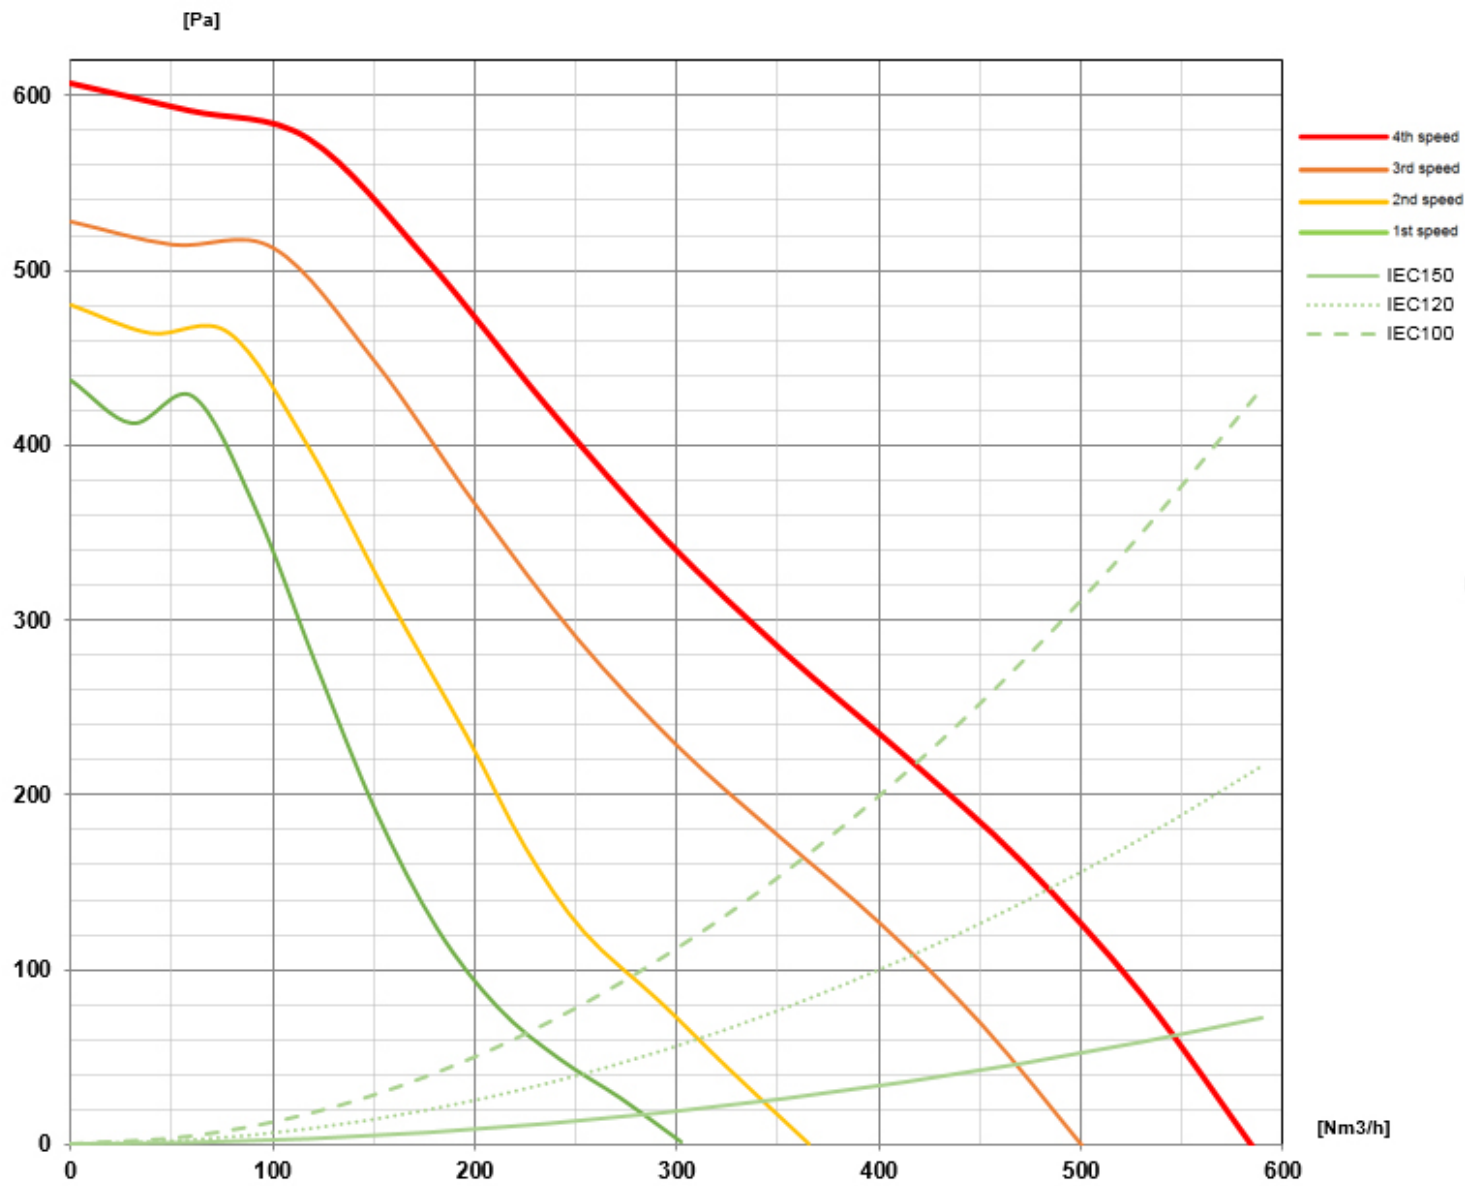


NUBE

Version
Slim motor 800 m³/h

Collection
DESIGNER SERIES - Design+

EAN code
8034122358895

ENERGY LABEL

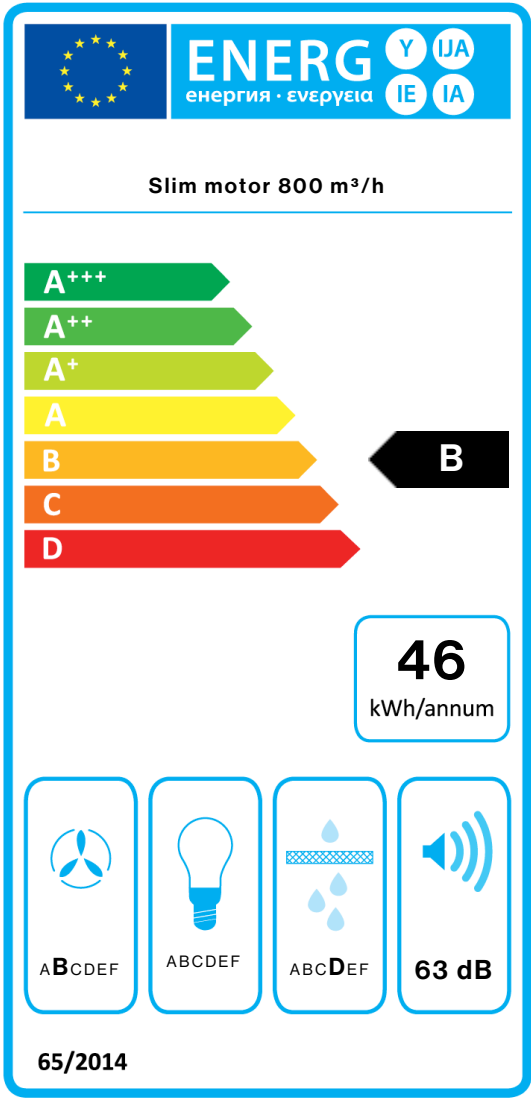

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	46,2	kWh/a
EEC	B	
FDE	24,3	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	285,0	m³/h
Qmax	470,0	m³/h
Qboost	550,0	m³/h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	58,8	
Qbep	337,0	m³/h
Pbep	298	Pa
Qboost	550,0	m³/h
Wbep	115,0	W
WL	0,00	W
Emiddle	0	lex
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.