

NUBE

Ohut moottori 800 m3/

Design+

8034122358895

OMINAISUUDET

Reunaimu

Elektroniset kytkimet

Metalliset rasvasuodattimet, irroitettavat ja pestävät

Kaukosäädin vakiovarusteena Dialogijärjestelmän automaattinen tila

Nube 90 voidaan kytkeä kaikkiin saatavilla oleviin moottoreihin.

Kts s.36

OPTIONAL ACCESSORIES

KACL.770#41F

Harjaton

KACL.782#49F

Ohut moottori 800 m3/

KACL.786#41F

Outdoor extractor fan 1000 m3/h

KACL.796#4AF

Outdoor extractor fan 1500 m3/h

KACL.797#4AF

Remote under-roof motor 1300 m3/h

KACL.798#41F

Moottori 950 m3/h

KACL.939#BF

Suodatin kit kattoon

TECHNICAL FEATURES

Installation type

Katto

Dimensions

90 cm

Viimeistelystä

Valkoinen maalattu teräs

Type of control

Elektroniset kytkimet

Speed settings

3 + boost

Lighting

No lighting

Filter

3 x Metallic filter "Base" - 290x267 mm

: 150 cm

: 150 cm

PACKAGING: WEIGHTS AND VOLUMES

NUBE

23.3 kg

20.5 kg

0.14 m³

1120 mm

190 mm

670 mm

Ohut moottori 800 m3/

6.5 kg

5.2 kg

0.04 m³

575 mm

195 mm

395 mm

CONSUMPTION AND CONNECTION FEATURES

220-240V

50-60Hz

MOTOR TECHNICAL SHEET

550 m³/h

I.E.C. 61591


66 dB(A)re1pW

I.E.C.60704-2-13

600 Pa

150 W

B



Hood and motor dimensions

NUBE


Ohut moottori 800 m3/

Design+

8034122358895

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
	52	58	63	66
dB(A)re1pW- I.E.C.60704-2-13				
(m3/h) I.E.C.61591	285	340	470	550
	400	480	500	600
	100	110	120	150
	220x90	220x90	220x90	220x90

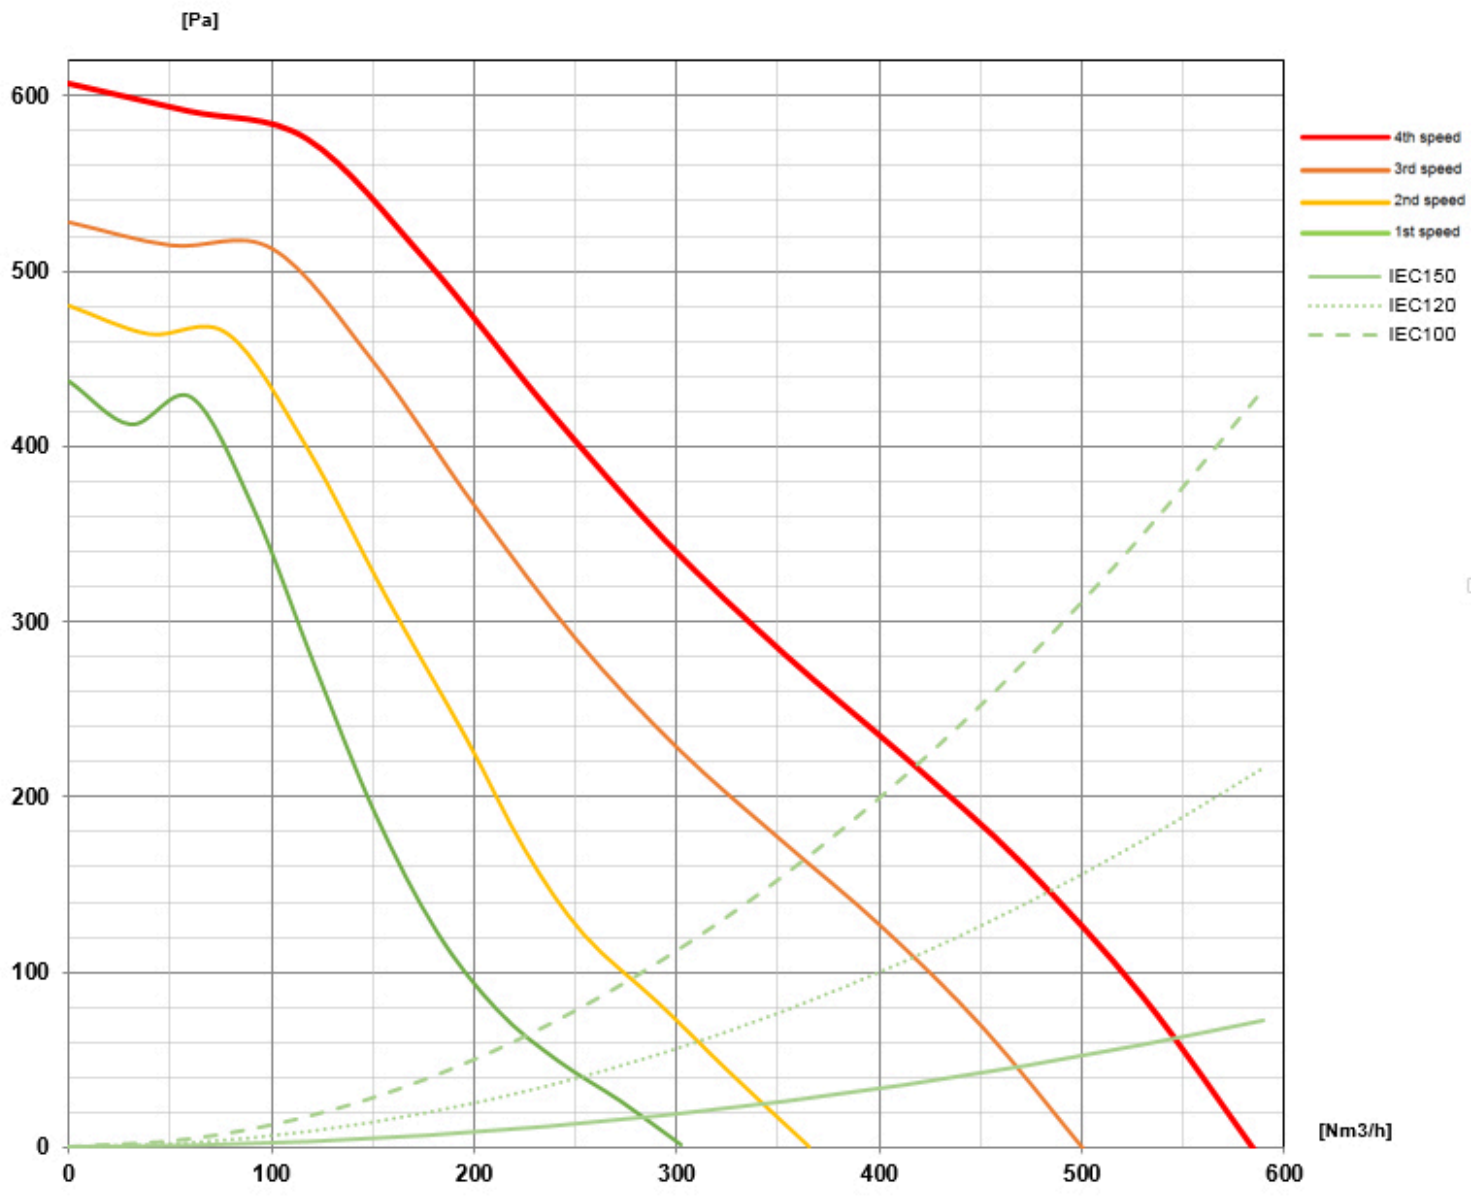


NUBE

Ohut moottori 800 m3/

Design+

8034122358895

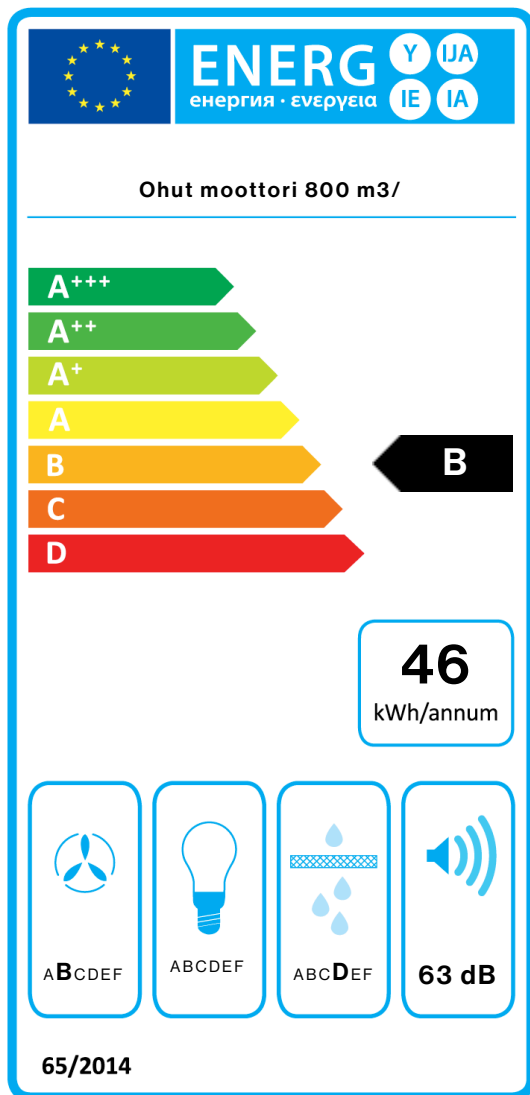

PF		
S	Falmec Spa	
M	Ohut moottori 800 m3/	
AEC	46,2	kWh/a
EEC	B	
FDE	24,3	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	285,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	550,0	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEL	58,8	
Qbep	337,0	m ³ /h
Pbep	298	Pa
Qboost	550,0	m ³ /h
Wbep	115,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.