

NINFEA TULIP

Version
Wall 90 cm - 600 m3/h

Collection
Classic

EAN code
8034122439327



FEATURES

- Painted white steel
- Slider
- Incandescent light
- Metallic grease filter, removable and washable
- Charcoal filter included

PAINTING Cherry / Walnut / Oak
STEEL White

OPTIONAL ACCESSORIES

KACL.602#B
Extension H850 - Wall

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
90 cm
- Finishing**
Painted white steel
- Motor**
600 m³/h
- Type of control**
Slider
- Lighting**
Incandescent 2x18 W
- Filter**
Metallic filter "Base" - 235x245 mm
- Charcoal filter**
Round charcoal filter Ø212 mm - Type 2 (included)
- Minimum distance**
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
23 kg
- Net weight**
19 kg
- Volumes**
0.4 m³
- Packaging size**
Length
995 mm
Height
670 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
480 m³/h
I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
180 W
- ENERGY CLASS**
C



NINFEA TULIP

Version
Wall 90 cm - 600 m3/h

Collection
Classic

EAN code
8034122439327

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120


NINFEA TULIP

Version
Wall 90 cm - 600 m3/h

Collection
Classic

EAN code
8034122439327

ENERGY LABEL

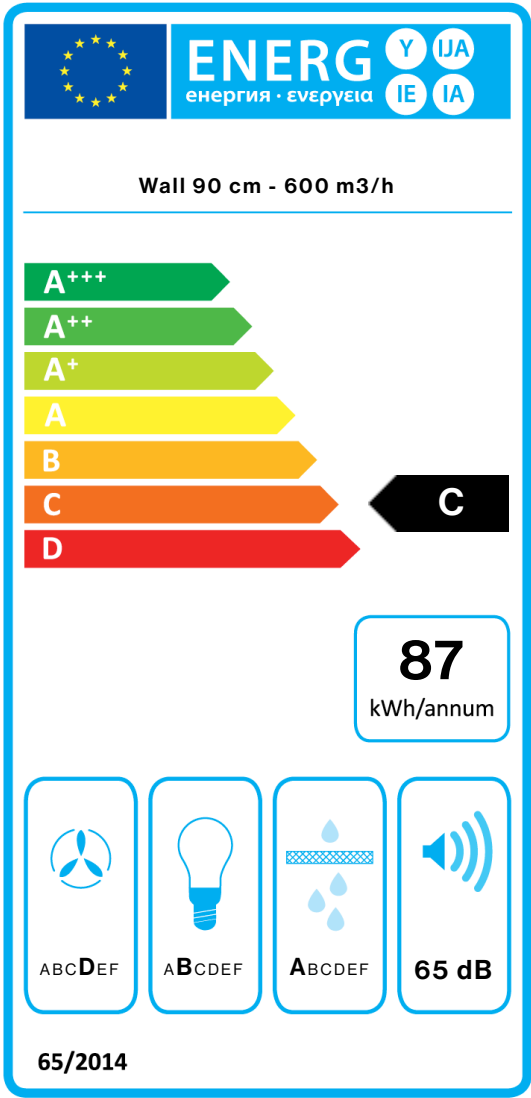

PF		
S	Falmec Spa	
M	Wall 90 cm - 600 m3/h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1.4	
EEL	80,6	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lex
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.