

## ALBA

Slimlinemotor 800 m3

### Sortiment

Design+

### EAN Kode

8034122359526



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

**Kantsug**  
**Elektronisk kontrolpanel**  
**Vaskbare rustfrie fedtfiltere**  
**Mulighed for Kul/Zeolitfilter.**  
**Regenererbart**  
**Fjernbetjening i tillæg**  
**LED-lys i kanten**  
**Glass perimeter frame**  
**Matte white painted panel**  
**Mulighed for at male panelet**  
**Motor sold separately**  
**Mulighed for Connection**  
**kogeplade**

## MULIGHEDER FOR TILVALG

**01KU-928**  
Kulfilter til recirkulationsblock  
KACL.939#BF

**01MO-GAVL**  
Gavlmotor til udendørs brug  
1000 m3/h

**01MO-GAVL-15**  
Gavlmotor til udendørs brug  
1500 m3/h

**01MO-LOFT**  
Loftmotorer under taget 950  
m3/h

**01MO-LOFT-13**  
Loftmotor 1300 m3 Ø200 mm

**01MO-SLIM**  
Slimlinemotor 800 m3

**KACL.396**  
Ø200 - Flanche

**KACL.398**  
Ø150 - Flange

**KACL.770#41F**  
Loftmotorer 1100 m3/h  
Brushless

**KACL.789**  
Junction for ceiling hoods

**KACL.931**  
Kit. Løst kul / zeolitfilter

**KACL.939#BF**  
Recirkulationskit (01RECIRK) til  
brug med Slimlinemotor. Til  
loftsemlang.

**KACL.953#BF**

## TEKNISK BESKRIVELSE

**Installation**  
Emhætte til loft

**Dimensioner**  
120 cm

**Materiale**  
Tempereret glas

**Betjening**  
Elektronisk kontrolpanel

**Hastighed**  
3 + boost

**Belysning**  
LED (4000 K)

Gaskomfur: 150 cm  
Kogeplade: 150 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### ALBA Bruttovægt

52.2 kg

### Nettovægt

45.2 kg

### Volumen

0.37 m<sup>3</sup>

### Mål på emballage

Længde

1395 mm

Højde

310 mm

Dybde

865 mm

### EKSTERN MOTOR

Slimlinemotor 800 m3

### Bruttovægt

6.5 kg

### Nettovægt

5.2 kg

### Volumen

0.04 m<sup>3</sup>

### Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

90 W

### Spænding

220-240V

### Frekvens

50-60Hz

### DATABLAD MOTOR

#### Maksimal kapacitet

550 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)

600 Pa

#### Maksimal sugestyrke

150 W

### ENERGIKLASSE

C

Carbon.Zeo vertical outlet  
ceiling filter unit kit

## ALBA


Slimlinemotor 800 m3

## Sortiment

Design+

## EAN Kode

8034122359526



*Hood and motor dimensions*

## ALBA

Slimlinemotor 800 m3

## Sortiment

Design+


## EAN Kode

8034122359526

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Kapacitet (m3/h) I.E.C.61591	285	340	470	550
Maksimalt tryk (Pa)	400	480	500	600
Forbrug (W)	100	110	120	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

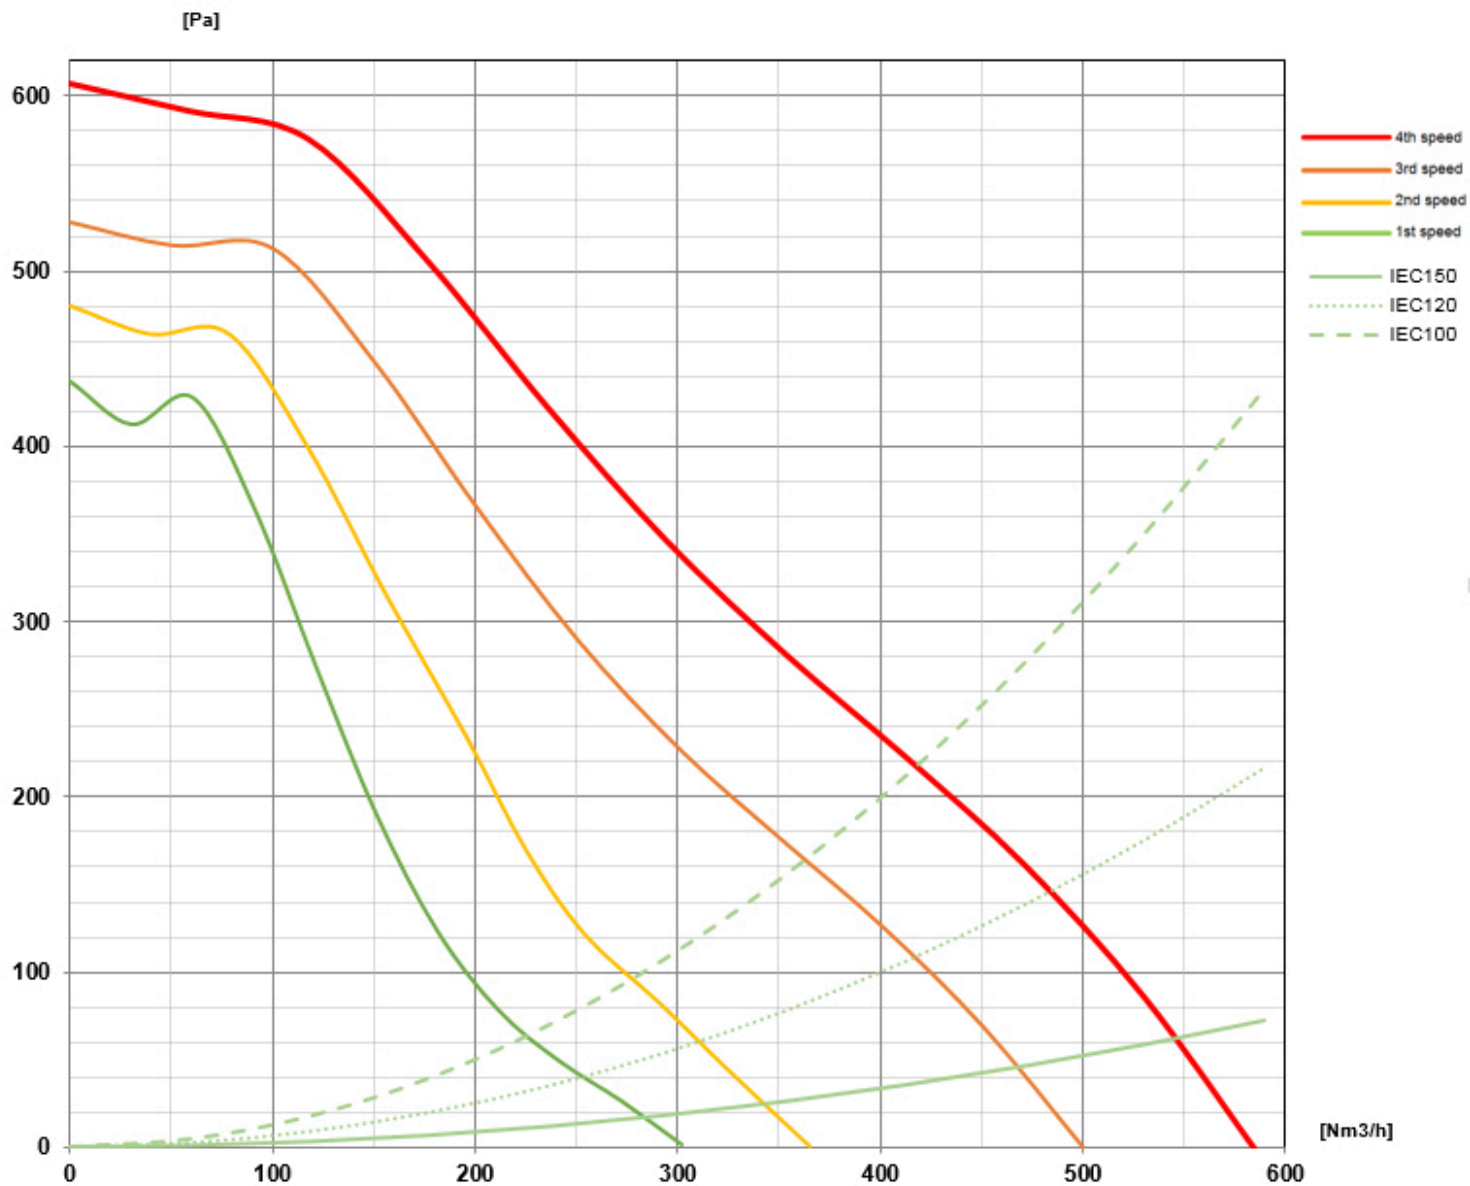

ALBA


Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122359526

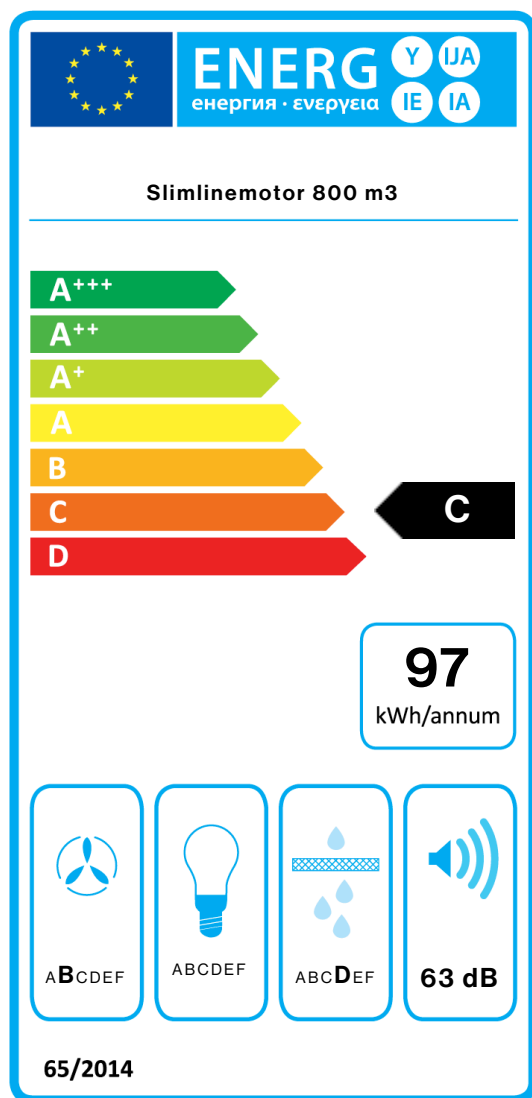

PF		
S	Falmec Spa	
M	Slimlinemotor 800 m3	
AEC	97,3	kWh/a
EEC	C	
FDE	24,3	
FDEC	B	
LE	4,0	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	285,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	550,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	83,1	
Qbep	337,0	m <sup>3</sup> /h
Pbep	298	Pa
Qboost	550,0	m <sup>3</sup> /h
Wbep	115,0	W
WL	70,00	W
Emiddle	277	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.