

ALBA

Version

Slim motor 800 m³/h

Collection

Design+

EAN code

8034122359526



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter,
removable and washable
Remote control included
Perimeter Led Lighting
Glass perimeter frame
Matte white painted panel
Possibility of painting the panel

OPTIONAL ACCESSORIES

KACL.782#49F

Slim motor 800 m³/h

KACL.786#41F

Outdoor extractor fan 1000
m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300
m³/h

KACL.798#41F

Remote under-roof motor 950
m³/h

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

120 cm

Finishing

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

Electronic control

PACKAGING:WEIGHTS AND VOLUMES

ALBA Gross weight

52.2 kg

Net weight

45.2 kg

Volumes

0.37 m³

Packaging size

Length

1395 mm

Height

310 mm

Depth

865 mm

REMOTE MOTOR Slim motor

800 m³/h **Gross weight**

6.5 kg

Net weight

5.2 kg

Volumes

0.04 m³

Packaging size

Length

575 mm

Height

195 mm

Depth

395 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

90 W

Voltage

220-240V

Frequency

50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity

550 m³/h

I.E.C. 61591

Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


600 Pa

Max. motor power

150 W

ENERGY CLASS

C

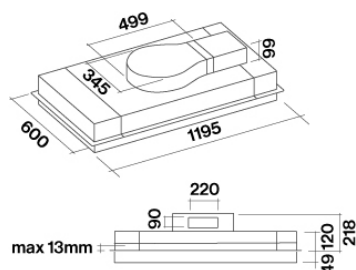

Hood and motor dimensions

ALBA

Version

Slim motor 800 m³/h

Collection

Design+


EAN code

8034122359526

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m ³ /h) I.E.C.61591	285	340	470	550
Maximum pressure (Pa)	400	480	500	600
Motor Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

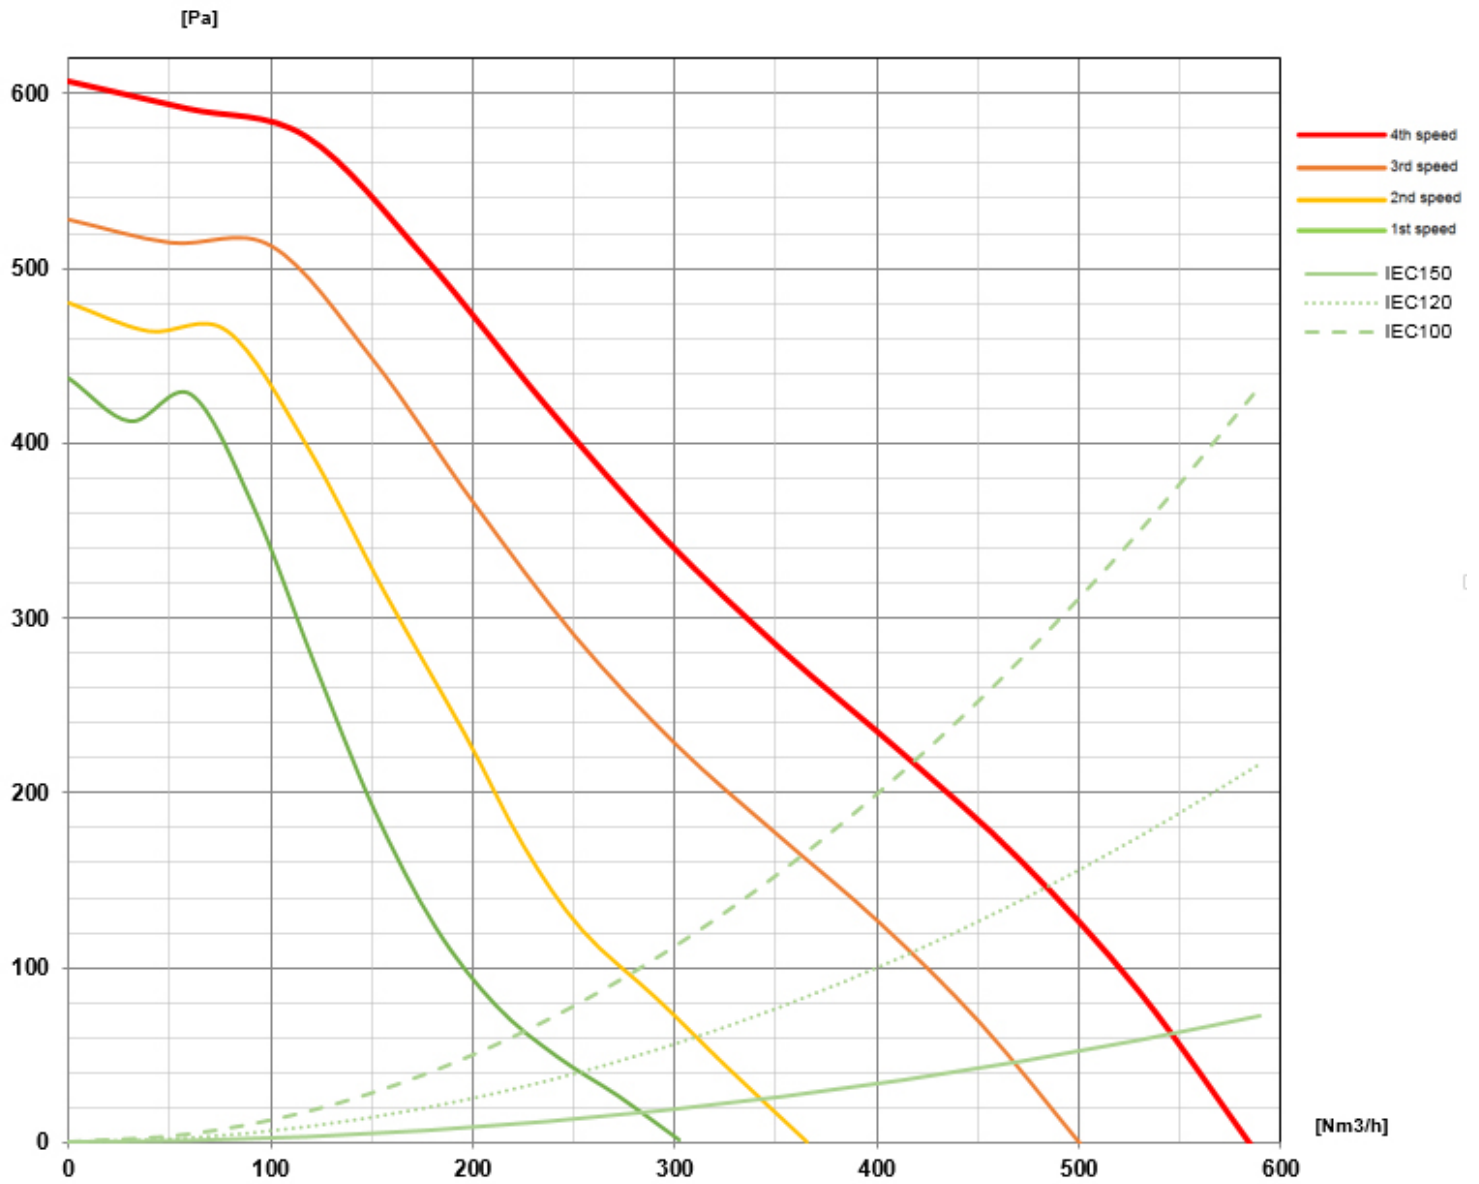

ALBA

Version

Slim motor 800 m³/h


Collection

Design+

EAN code

8034122359526

ENERGY LABEL

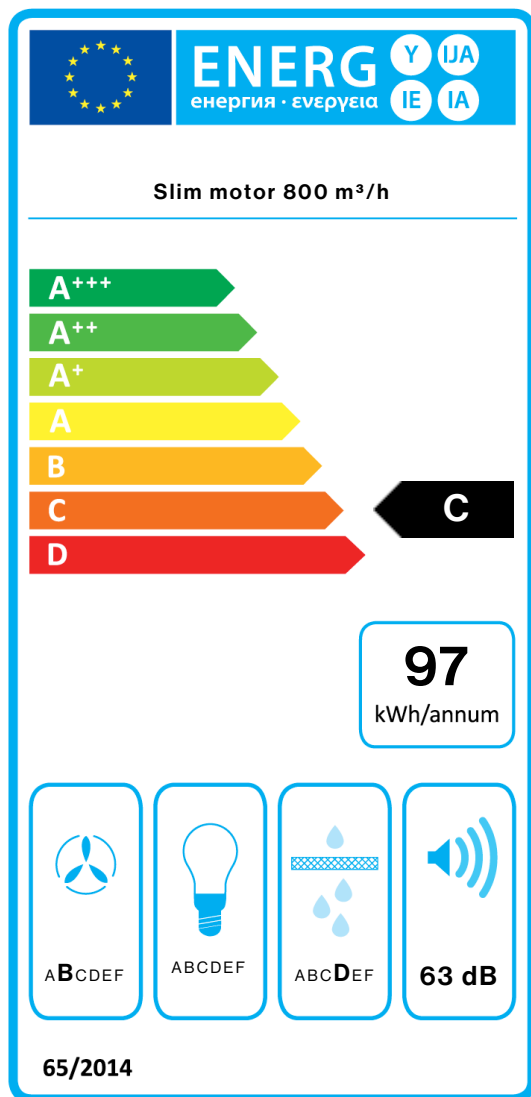

PF		
S	Falmec Spa	
M	Slim motor 800 m ³ /h	
AEC	97,3	kWh/a
EEC	C	
FDE	24,3	
FDEC	B	
LE	4,0	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	285,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	550,0	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	83,1	
Qbep	337,0	m ³ /h
Pbep	298	Pa
Qboost	550,0	m ³ /h
Wbep	115,0	W
WL	70,00	W
Emiddle	277	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.