

ALBA

Loftmotorer under taget 950
m³/h

Sortiment
Design+

EAN Kode
8034122359526



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Kantsug
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltere
Mulighed for Kul/Zeolitfilter.
Regenererbart
Fjernbetjening i tillæg
LED-lys i kanten
Glass perimeter frame
Matte white painted panel
Mulighed for at male panelet
Motor sold separately
Mulighed for Connection
kogeplade

MULIGHEDER FOR TILVALG

01KU-928
Kulfilter til recirkulationsblock
KACL.939#BF

01MO-GAVL
Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15
Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT
Loftmotorer under taget 950
m³/h

01MO-LOFT-13
Loftmotor 1300 m³ Ø200 mm

01MO-SLIM
Slimlinemotor 800 m³

KACL.396
Ø200 - Flanche

KACL.398
Ø150 - Flange

KACL.770#41F
Loftmotorer 1100 m³/h
Brushless

KACL.789
Junction for ceiling hoods

KACL.931
Kit. Løst kul / zeolitfilter

KACL.939#BF
Recirkulationskit (01RECIRK) til
brug med Slimlinemotor. Til
loftsemlang.

KACL.953#BF

TEKNISK BESKRIVELSE

Installation
Emhætte til loft

Dimensioner
120 cm

Materiale
Tempereret glas

Betjening
Elektronisk kontrolpanel

Hastighed
3 + boost

Belysning
LED (4000 K)

Gaskomfur: 150 cm
Kogeplade: 150 cm

EMBALLAGE: VÆGT OG VOLUMEN

ALBA Bruttovægt

52.2 kg

Nettovægt

45.2 kg

Volumen

0.37 m³

Mål på emballage

Længde

1395 mm

Højde

310 mm

Dybde

865 mm

EKSTERN MOTOR Loftmotorer under taget 950 m³/h

Bruttovægt

10 kg

Nettovægt

9 kg

Volumen

0.06 m³

Mål på emballage

Længde

435 mm

Højde

340 mm

Dybde

385 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

90 W

Spænding

220-240V

Frekvens

50-60Hz

DATABLAD MOTOR

Maksimal kapacitet

830 m³/h

I.E.C. 61591

Maksimalt støjniveau

68 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)

580 Pa

Maksimal sugestyrke

270 W

ENERGIKLASSE

C

Carbon.Zeo vertical outlet
ceiling filter unit kit

ALBA


Loftmotorer under taget 950
m³/h

Sortiment

Design+

EAN Kode

8034122359526

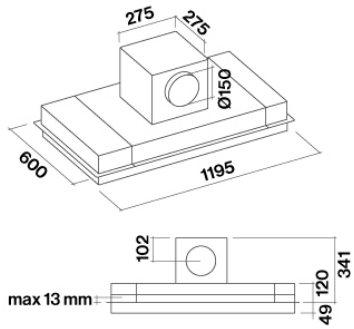

Hood and motor dimensions

ALBA

Loftmotorer under taget 950
m³/h


Sortiment
Design+

EAN Kode
8034122359526

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	50	57	64	68
Kapacitet (m ³ /h) I.E.C.61591	360	480	630	830
Maksimalt tryk (Pa)	480	520	560	580
Forbrug (W)	190	220	250	270
Luftudtag	150	150	150	150

KAPACITET / TRYK

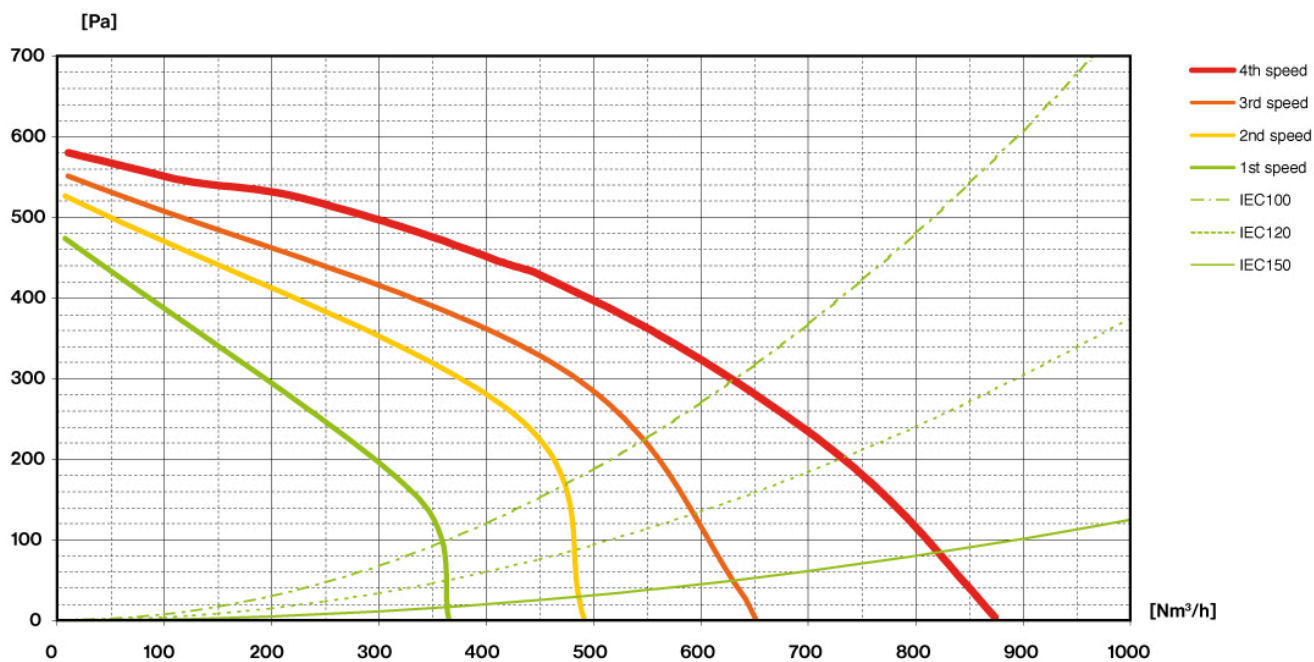


ALBA

Loftmotorer under taget 950
m³/h

Sortiment
Design+

EAN Kode
8034122359526

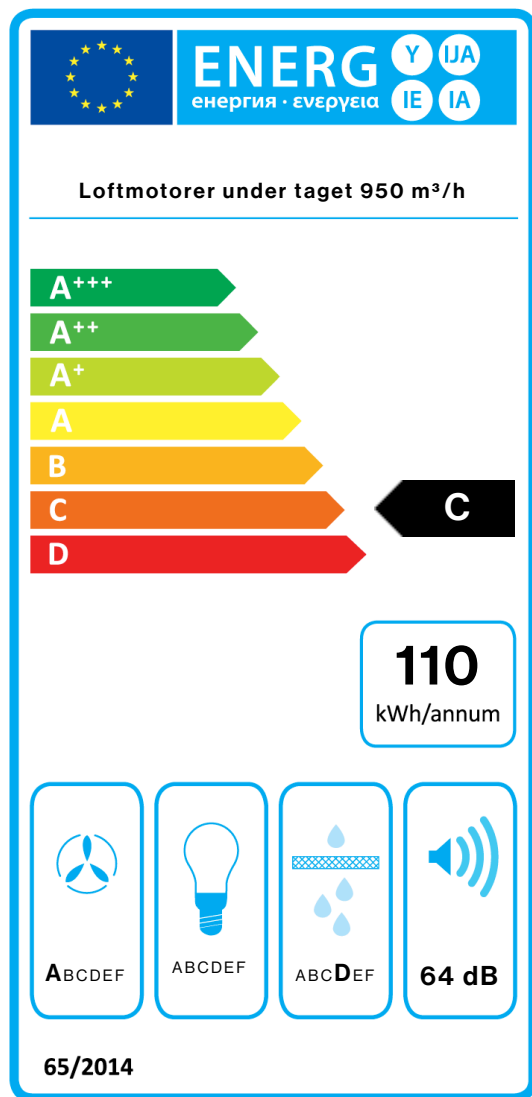

PF		
S	Falmec Spa	
M	Loftmotorer under taget 950 m ³ /h	
AEC	110,2	kWh/a
EEC	C	
FDE	29,5	
FDEC	A	
LE	4,0	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	360,0	m ³ /h
Qmax	630,0	m ³ /h
Qboost	830,0	m ³ /h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W

PI		
F	0.9	
EEl	72,1	
Qbep	441,0	m ³ /h
Pbep	434	Pa
Qboost	830,0	m ³ /h
Wbep	180,0	W
WL	70,00	W
Emiddle	277	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.