

PLANE

01PL-120-VS Væg 120 cm - 800 m³/h

Sortiment

Design

EAN Kode

8034122330273



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite

Elektronisk kontrolpanel

LED lys

Air Falmec fedtfiltere for balanceret sug

Kulfilter

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT

Loftmotorer under taget 950 m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

07MAGIC

Beskyttende renseklude til rustfrit stål. Kasse med 10 klude

KACL.510#I

Forlænger H700 væg

KACL.512#I

Forlænger H960 væg

KACL.770#41F

Loftmotorer 1100 m³/h

Brushless

KACL.864

Air flow conveyer til recirkulation. Væghængte modeller.

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

120 cm

Materiale

Scotch brite rustfrit stål (AISI 304)

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 3x1,2 W - 3200 K

Filter

4 x Metalfiltere Air Falmec vægmodeller 285x301 mm

Kulfilter

Rektangulært kulfilter. Type 3 (Tilvalg)

Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

28 kg

Nettovægt

22 kg

Volumen

0.35 m³

Mål på emballage

Længde

1310 mm

Højde

450 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

680 m³/h

I.E.C. 61591

Maksimalt støjniveau

68 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)

500 Pa

Maksimal sugestyrke

215 W

ENERGIKLASSE

B

PLANE

01PL-120-VS Væg 120 cm - 800
m³/h

Sortiment

Design


EAN Kode

8034122330273

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Kapacitet (m ³ /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

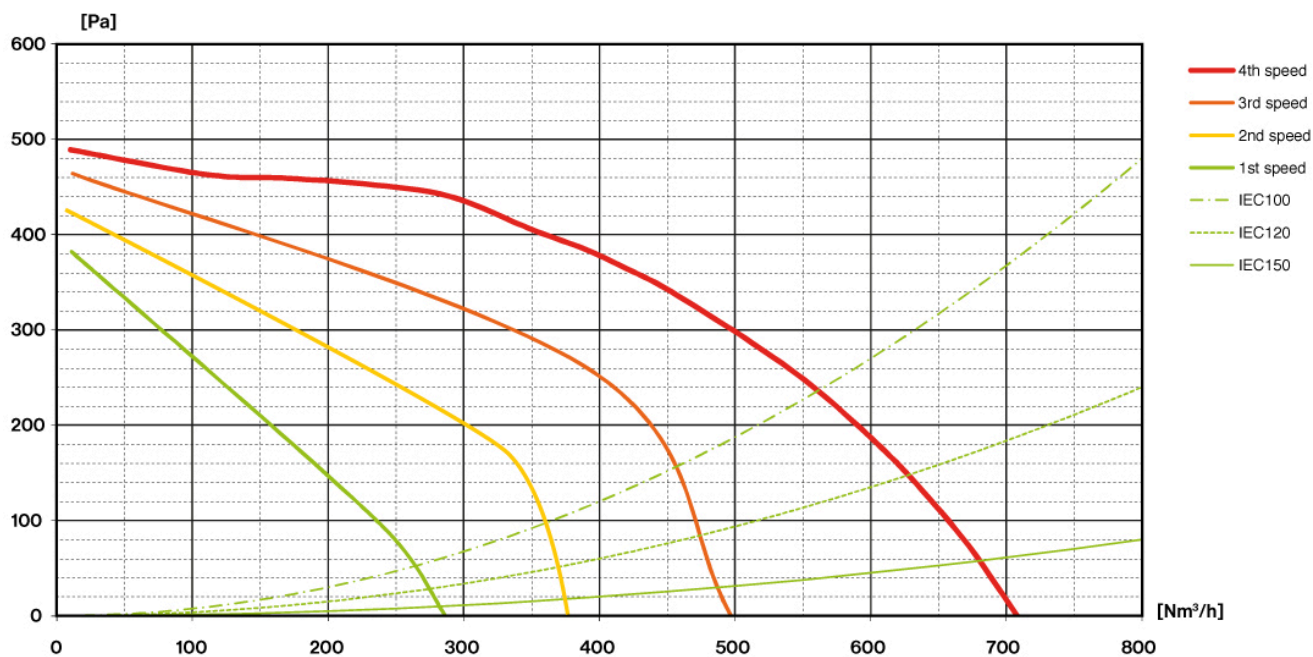

PLANE


01PL-120-VS Væg 120 cm - 800
m³/h

Sortiment

Design

EAN Kode

8034122330273

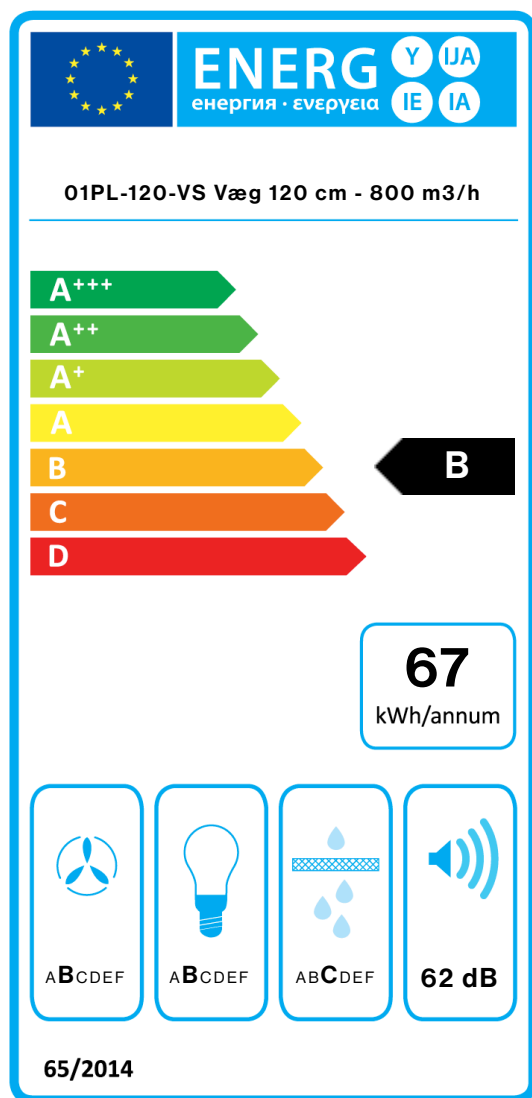

PF		
S	Falmec Spa	
M	01PL-120-VS Væg 120 cm - 800 m ³ /h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,2	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	64,3	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	6,50	W
Emiddle	131	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.