

PLANE NRS

01PL-120-NRS-V Væg 120 cm -
800 m³/h

Sortiment

Silence - NRS

EAN Kode

8034122343495



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch
brite
NRS teknologi for et roligere
køkken
Elektronisk kontrolpanel
LED lys
Air Falmec fedtfilter for
balanceret sug
Regenererbart kul/zeolitifiler

Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 10/30/2020

MULIGHEDER FOR TILVALG

01KU-NRS-2

Kulfilter Plane NRS 921

07MAGIC

Beskyttende renseklude til
rustfrit stål. Kasse med 10 klude

KACL.400

Silent / Conveyor NRS

KACL.570#I

Forlænger H700 væg

KACL.571#I

Forlænger H960 væg

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

120 cm

Materiale

Scotch brite rustfrit stål (AISI
304)

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 3x1,2 W - 3200 K

Filter

4 x Metalfiltre Air Falmec
vægmodeller 285x301 mm

Kulfilter

Charcoal and Zeolite filter
(Tilvalg)

Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

43 kg

Nettovægt

36 kg

Volumen

0.65 m³

Mål på emballage

Længde

1310 mm

Højde

650 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

610 m³/h

I.E.C. 61591

Maksimalt støjniveau

54,5 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


510 Pa

Maksimal sugestyrke

224 W

ENERGIKLASSE

B



PLANE NRS

01PL-120-NRS-V Væg 120 cm -
800 m³/h

Sortiment

Silence - NRS


EAN Kode

8034122343495

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	37	41	46	54,5
Kapacitet (m ³ /h) I.E.C.61591	220	290	375	610
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

KAPACITET / TRYK

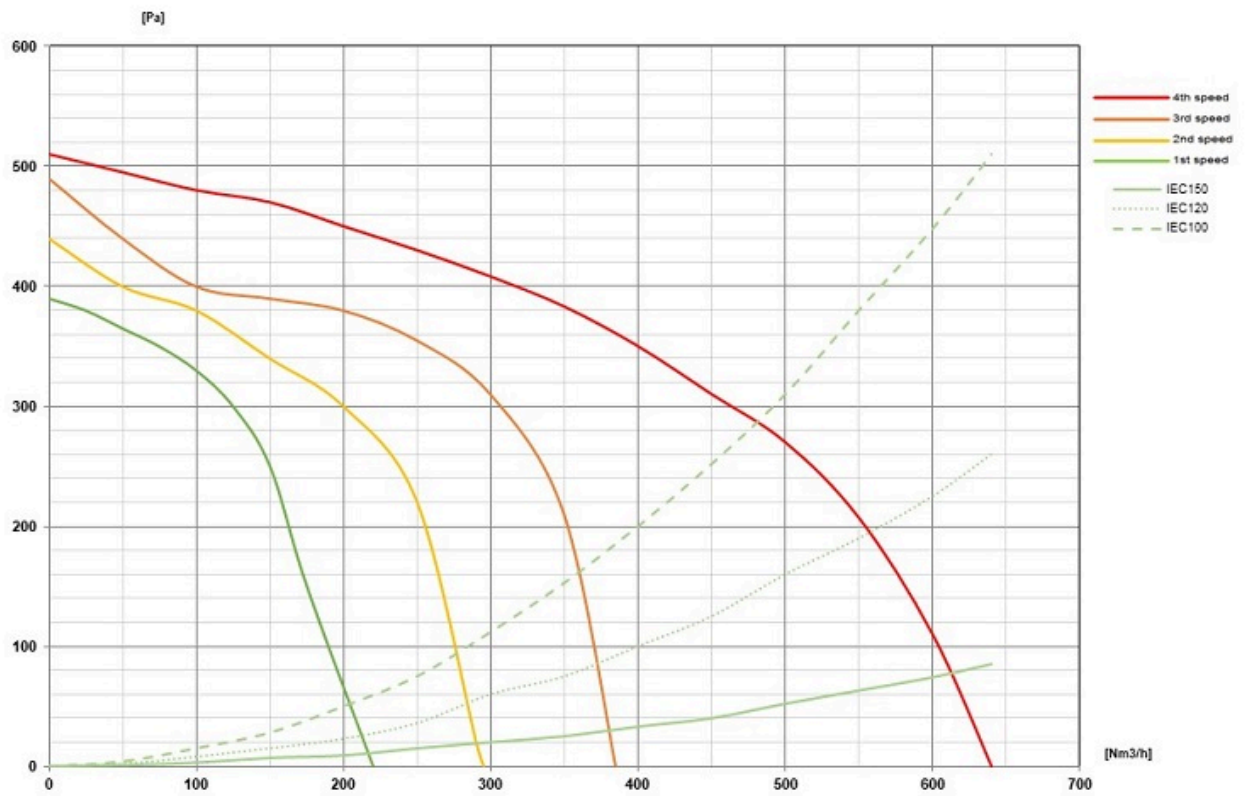

PLANE NRS


01PL-120-NRS-V Væg 120 cm -
800 m3/h

Sortiment

Silence - NRS

EAN Kode

8034122343495

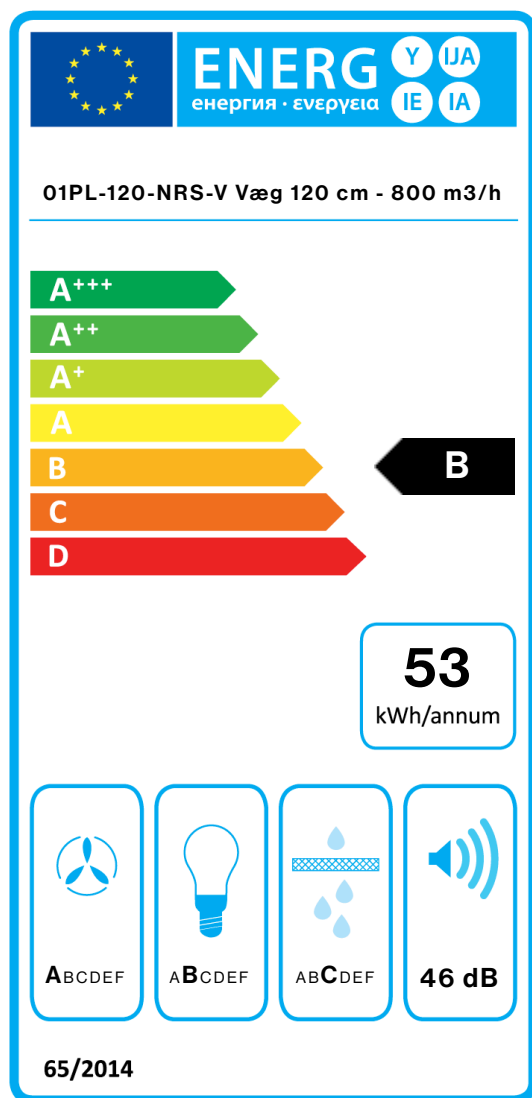

PF		
S	Falmec Spa	
M	01PL-120-NRS-V Væg 120 cm - 800 m3/h	
AEC	52,6	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	20,2	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	57,9	
Qbep	369,0	m ³ /h
Pbep	369	Pa
Qboost	610,0	m ³ /h
Wbep	131,0	W
WL	6,50	W
Emiddle	131	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.