

## PLANE NRS

01PL-120-NRS-F Frithængt 120  
cm - 800 m<sup>3</sup>/h

### Sortiment

Silence - NRS

### EAN Kode

8034122348384



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Rustfrit stål (AISI 304) scotch  
brite

NRS teknologi for et roligere  
køkken

Elektronisk kontrolpanel

LED lys

Air Falmec fedtfilter for  
balanceret sug

Regenererbart kul/zeolitfiler

Availability Carbon.Zeo filter  
KACL.961 for hoods produced  
from 12/01/2020

## MULIGHEDER FOR TILVALG

### 01KU-NRS-2

Kulfilter Plane NRS 921

### 07MAGIC

Beskyttende renseklude til  
rustfrit stål. Kasse med 10 klude

### KACL.400

Silent / Conveyor NRS

### KACL.572#I

Forlænger H1200 frithængt

## TEKNISK BESKRIVELSE

### Installation

Frithængt

### Dimensioner

120 cm

### Materiale

Scotch brite rustfrit stål (AISI  
304)

### Motor

800 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

LED 4x1,2 W - 3200 K

### Filter

4 x Metalfiltre Air Falmec  
frithængte modeller 285x301 mm

### Kulfilter

Charcoal and Zeolite filter  
(Tilvalg)

### Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

51 kg

### Nettovægt

44 kg

### Volumen

0.62 m<sup>3</sup>

### Mål på emballage

Længde

1330 mm

Højde

645 mm

Dybde

725 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

## DATABLAD MOTOR

### Maksimal kapacitet

610 m<sup>3</sup>/h

I.E.C. 61591

### Maksimalt støjniveau

54,5 dB(A)re1pW

I.E.C.60704-2-13

### Maksimalt tryk (Pa)


510 Pa

### Maksimal sugestyrke

224 W

## ENERGIKLASSE

B



## PLANE NRS

01PL-120-NRS-F Frithængt 120  
cm - 800 m3/h

### Sortiment

Silence - NRS


### EAN Kode

8034122348384

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	37	41	46	54,5
Kapacitet (m3/h) I.E.C.61591	220	290	375	610
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

# KAPACITET / TRYK

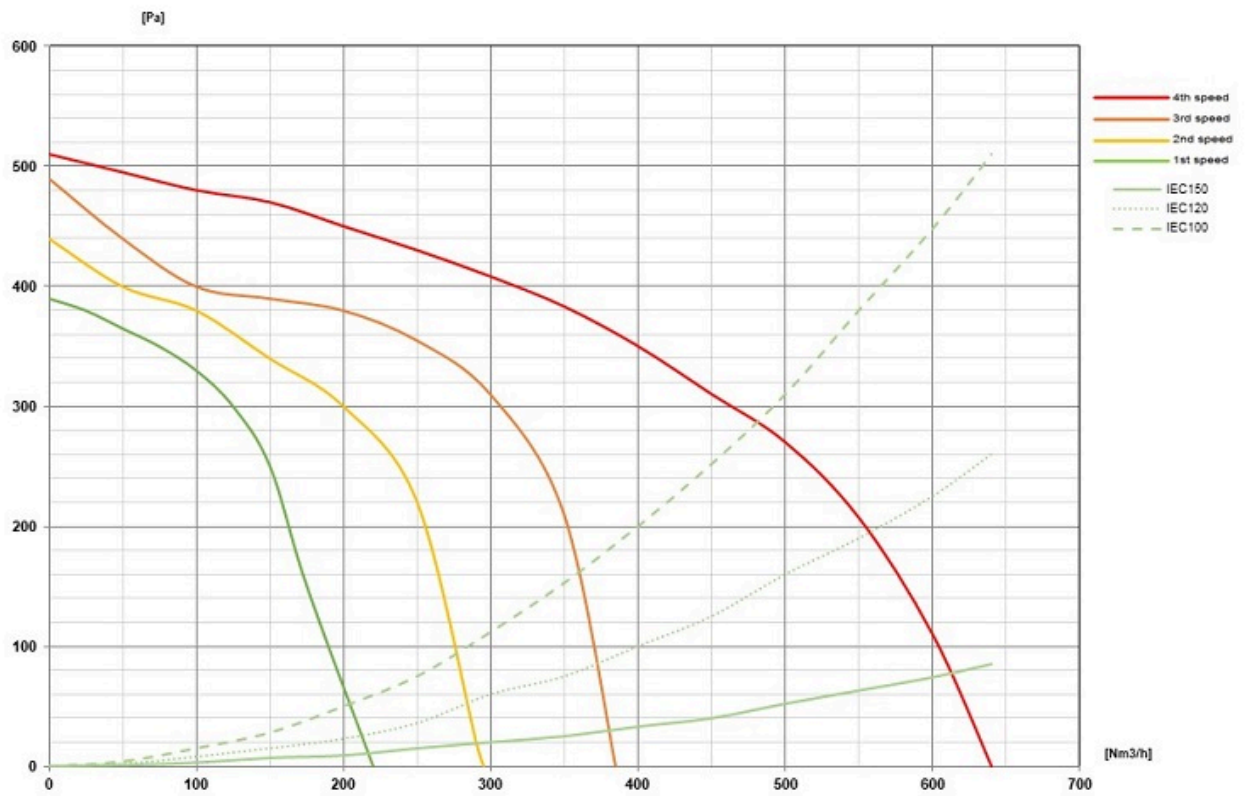

## PLANE NRS


01PL-120-NRS-F Frithængt 120  
cm - 800 m3/h

### Sortiment

Silence - NRS

### EAN Kode

8034122348384

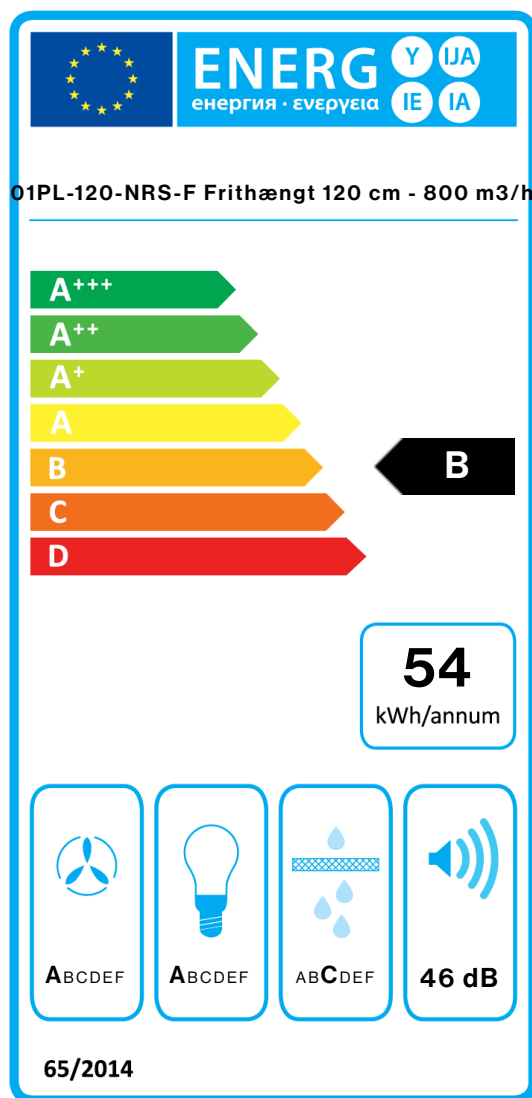

PF		
S	Falmec Spa	
M	01PL-120-NRS-F Frithængt 120 cm - 800 m3/h	
AEC	54,1	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	28,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m <sup>3</sup> /h
Qmax	375,0	m <sup>3</sup> /h
Qboost	610,0	m <sup>3</sup> /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	58,7	
Qbep	369,0	m <sup>3</sup> /h
Pbep	369	Pa
Qboost	610,0	m <sup>3</sup> /h
Wbep	131,0	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	46	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.