

PLANE NRS

Version

Island 120 cm - 800 m³/h

Collection

NRS Collection

EAN code

8034122348384



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

- Scotch brite stainless steel (AISI 304)**
- NRS technology for a quieter kitchen**
- Electronic control**
- LED lighting**
- Air Falmec filter for balanced suction**
- Optional charcoal filter**

OPTIONAL ACCESSORIES

- KACL.921**
High Performance Filter
- KACL.572#1**
Extension H1200 - Island
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.400**
Silent / Conveyor NRS

TECHNICAL FEATURES

- Installation type**
Island
- Dimensions**
120 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 4x1,2 W - 3200 K
- Filter**
Metallic filter "Air Falmec" - Island 285x301 mm - 2 pz
- Charcoal filter**
High Performance Filter
- Minimum distance**
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
51.00 kg
- Net weight**
44.00 kg
- Volume**
0.67 m³
- Packaging size**
Length
1330 mm
Height
725 mm
Depth
695 mm


CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage / Frequency**
220-240V

50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
610 m³/h
I.E.C. 61591
- Maximum noise level**
54,5 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
510 Pa
- Max. motor power**
224 W
- ENERGY CLASS**
B



PLANE NRS

Version

Island 120 cm - 800 m³/h

Collection

NRS Collection

EAN code

8034122348384

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591 Normalized Pipes	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

PLANE NRS

Version

Island 120 cm - 800 m³/h


Collection

NRS Collection

EAN code

8034122348384

ENERGY LABEL

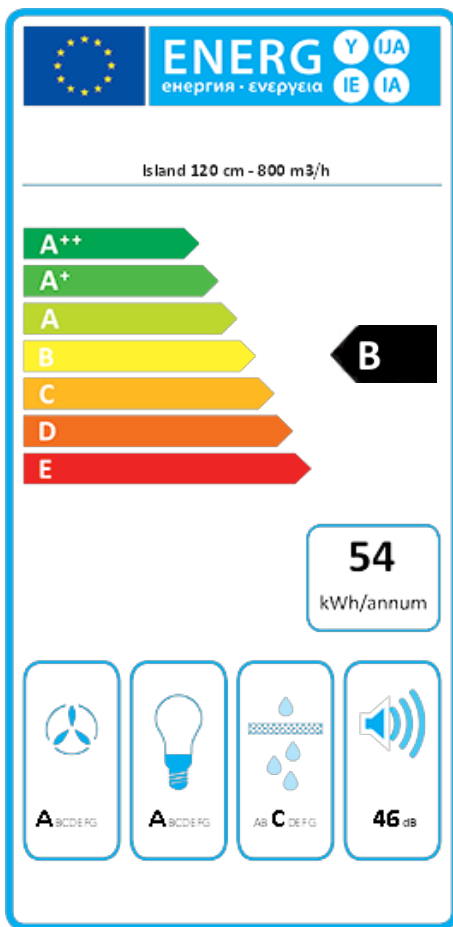

PF		
S	Falmec Spa	
M	Island 120 cm - 800 m ³ /h	
AEC	54,1	kWh/a
ECC	B	
FDE	28,9	
FDEC	A	
LE	28,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	58,7	
Qbep	369,0	m ³ /h
Pbep	369	Pa
Qboost	610,0	m ³ /h
Wbep	131,0	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.