

## PLANE ON DEMAND

### Version

Wall 90/119 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122342559

## FEATURES

**Scotch brite stainless steel (AISI 304)**

**Electronic control**

**LED lighting**

**Top filter, removable and washable**

**Charcoal filter included**

Questo modello è un modello personalizzabile. La dimensioni è adattabile alle necessità del cliente. La quota della sopra riportata è indicativa e si riferisce alla dimensione massima di questa versione.

## OPTIONAL ACCESSORIES

### **KACL.510#I**

Extension H700 - Wall

### **KACL.512#I**

Prolunga H960 - Parete

### **KACL.815**

Protective cleaning cloths for stainless steel (box 10 pcs)

### **KACL.798#41F**

Remote under-roof motor 950 m<sup>3</sup>/h

### **KACL.770#41F**

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### **KACL.786#41F**

Outdoor extractor fan 1000 m<sup>3</sup>/h

### **KACL.796#4AF**

Outdoor extractor fan 1500 m<sup>3</sup>/h

### **KACL.797#4AF**

Remote under-roof motor 1300 m<sup>3</sup>/h

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

119 cm

### Finishing

Scotch brite stainless steel (AISI 304)

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 3x1,2 W - 3200 K

### Charcoal filter

Square charcoal filter - Type 3

### Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Net weight

21.00 kg

### Volume

0 m<sup>3</sup>

### Packaging size

Length

0 mm

Height

0 mm

Depth

0 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

350 W

### Voltage / Frequency

220-240V

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

500 Pa

### Max. motor power

215 W

### ENERGY CLASS

B

## PLANE ON DEMAND

### Version

Wall 90/119 cm - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122342559

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacity (m <sup>3</sup> /h) I.E.C.61591 Normalized Pipes	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

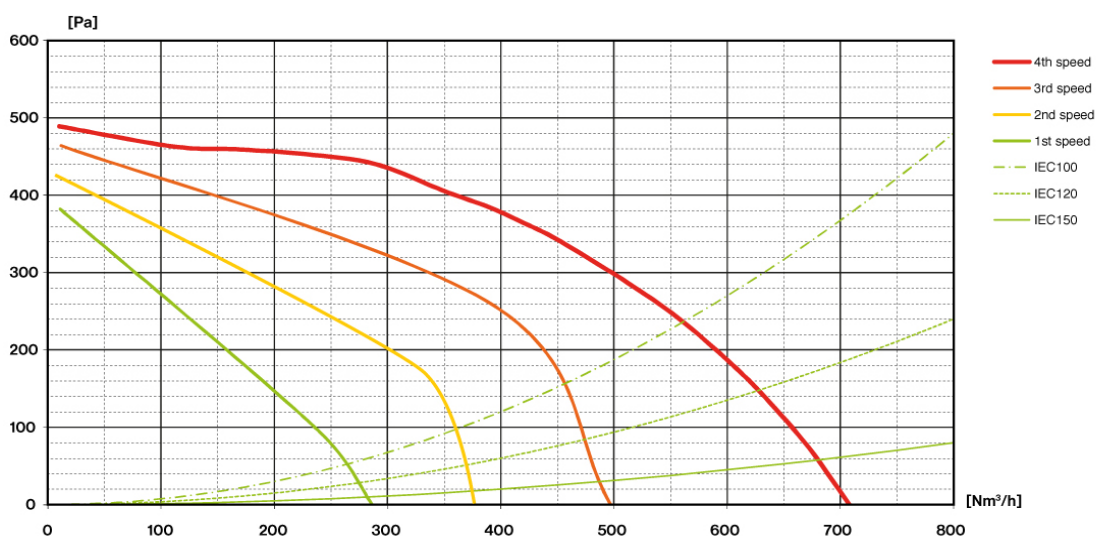

## PLANE ON DEMAND

### Version

Wall 90/119 cm - 800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122342559

## ENERGY LABEL

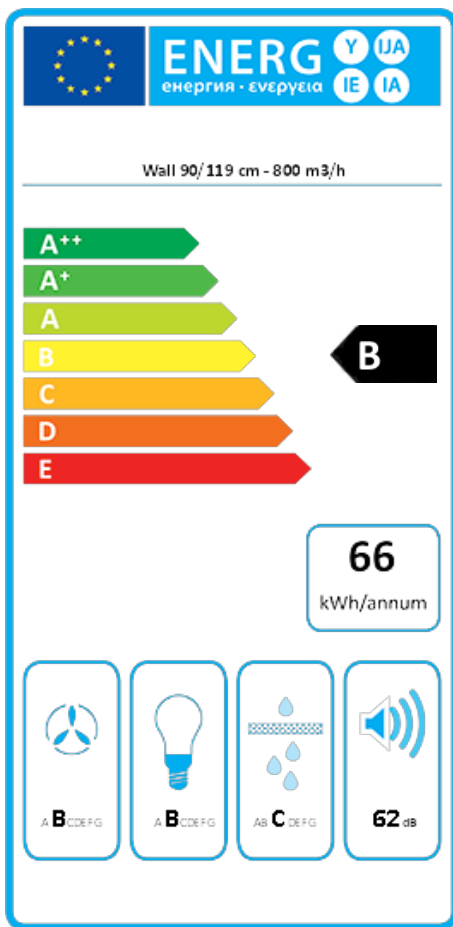

PF		
S	Falmec Spa	
M	Wall 90/119 cm - 800 m <sup>3</sup> /h	
AEC	66,1	kWh/a
ECC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.