falmec

PLANE TOP

Version
Wall canopy 120 cm - Fasteel

Collection
DESIGNER SERIES - Fasteel

EAN code
8034122203157

The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Fasteel no fingerprint Scotch-Brite stainless steel
Perimeter suction
Electronic controls
LED lighting
Metallic grease filter, removable and washable
Charcoal filter included
Optional remote control

Special order

OPTIONAL ACCESSORIES

EW1300
Remote under-roof motor 1300 m3/h
EW1500
Outdoor extractor fan 1500 m3/h
IN950
Remote under-roof motor 950 m3/h
KACL.510#X
Extension H700 - Wall Fasteel
KACL.770#41F
Remote under-roof 1100 m3/h Brushless
KACL.786#41F
Outdoor extractor fan 1000 m3/h
KACL.864
Air flow conveyor for re-circulation version (Wall)



TECHNICAL FEATURES

Installation type
Wall
Dimensions
120 cm
Finishing
Scotch-Brite "no fingerprint" Fasteel
Motor
800 m³/h
Type of control
Electronic controls
Speed settings
4
Lighting
LED 3x1.2 W - 3200 K
Filter
2 x Metallic filter "Base" - 274x274 mm
Charcoal filter
Square charcoal filter - Type 3 (included)
Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
31 kg
Net weight
25 kg
Volumes
0.37 m³
Packaging size
Length
1310 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
680 m³/h
I.E.C. 61591
Maximum sound level
68 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Maximum motor power
215 W
ENERGY CLASS
B

falmec

PLANE TOP

Version
Wall canopy 120 cm - Fasteel

Collection
DESIGNER SERIES - Fasteel

EAN code
8034122203157

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Sound level dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacity (m3/h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

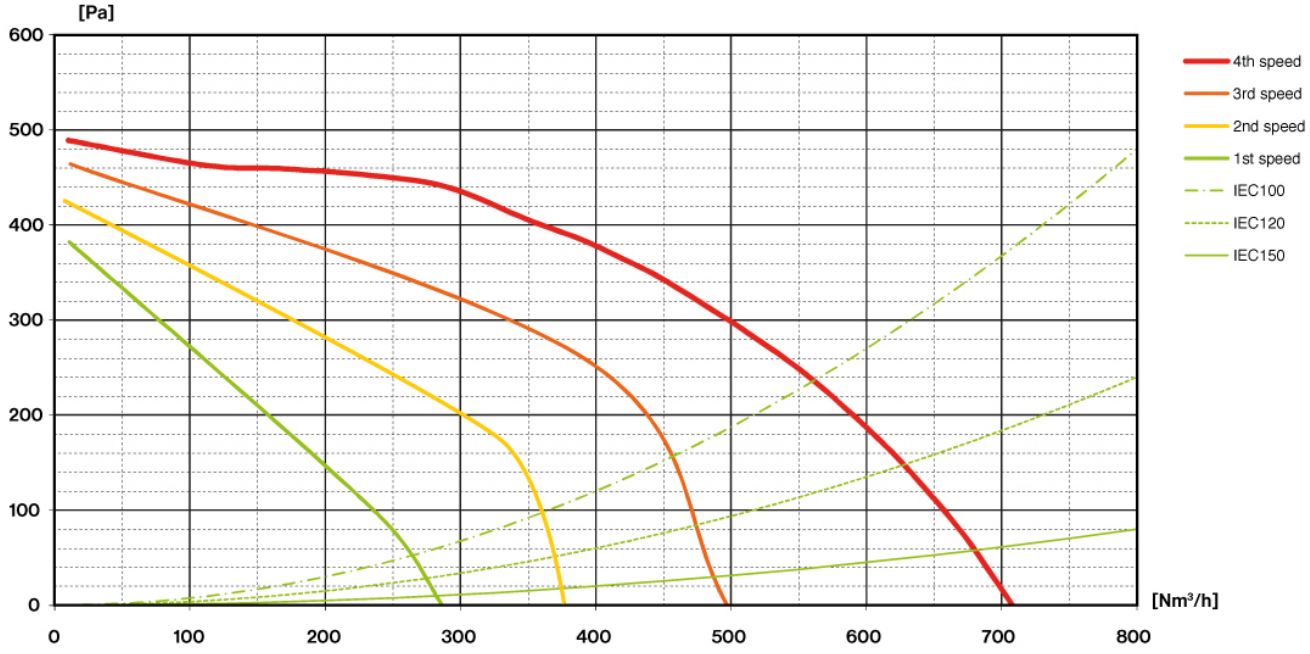

falmec

PLANE TOP

Version
Wall canopy 120 cm - Fasteel

Collection
DESIGNER SERIES - Fasteel

EAN code
8034122203157

ENERGY LABEL

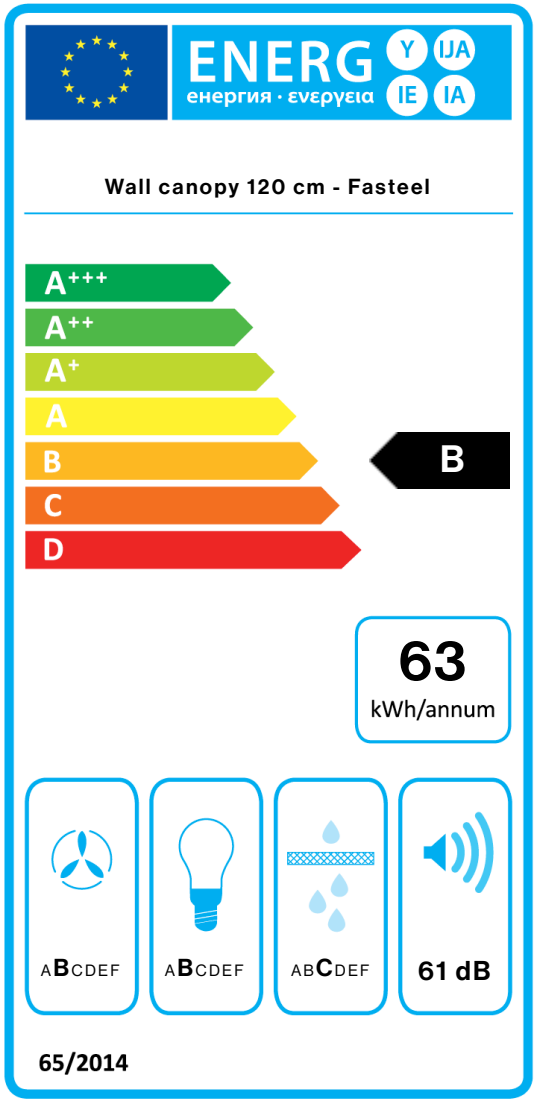

PF		
S	Falmec Spa	
M	Wall canopy 120 cm - Fasteel	
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m³/h
Qmax	480,0	m³/h
Qboost	680,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	63,5	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	680,0	m³/h
Wbep	147,7	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.