falmec

PLANE TOP

01PL-90-FF Frithængt 90 cm
Fasteel - 800 m3/h

Sortiment
Fasteel

EAN Kode
8034122202907

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Fasteel, no fingerprints
Kantsug
Elektronisk kontrolpanel
LED lys
Vaskbare rustfrie fedtfiltre
Kulfilter
Tilvalg fjernbetjening

MULIGHEDER FOR TILVALG

01MO-GAVL
Gavlmotor til udendørs brug 1000 m3/h
01MO-GAVL-15
Gavlmotor til udendørs brug 1500 m3/h
01MO-LOFT
Loftmotorer under taget 950 m3/h
01MO-LOFT-13
Loftmotor 1300 m3 Ø200 mm
KACL.557#X
Forlænger H1200 frithængt - Fasteel
KACL.770#41F
Loftmotorer 1100 m3/h Brushless
KACL.864
Air flow conveyer til recirkulation. Væghængte modeller.



TEKNISK BESKRIVELSE

Installation
Frithængt
Dimensioner
90 cm
Materiale
Scotch brite Fasteel ingen fingeraftryk
Motor
800 m³/h
Betjening
Elektronisk kontrolpanel
Hastighed
3 + boost
Belysning
LED 4x1,2 W - 3200 K
Filter
2 x Metallfiltre - Base - 274x274 mm
Kulfilter
Rektangulært kulfilter. Type 3 (Tilvalg)
Minimumsafstand
Gaskomfur: 63 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
37 kg
Nettovægt
31 kg
Volumen
0.36 m³
Mål på emballage
Længde
1035 mm
Højde
470 mm
Dybde
740 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Maksimalt forbrug
280 W
Spænding
220-240V
Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
660 m³/h
I.E.C. 61591
Maksimalt støjniveau
67 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
500 Pa
Maksimal sugestyrke
215 W
ENERGIKLASSE
B

falmec

PLANE TOP

01PL-90-FF Frithængt 90 cm
Fasteel - 800 m3/h

Sortiment
Fasteel

EAN Kode
8034122202907

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Kapacitet (m3/h) I.E.C.61591	270	360	470	660
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

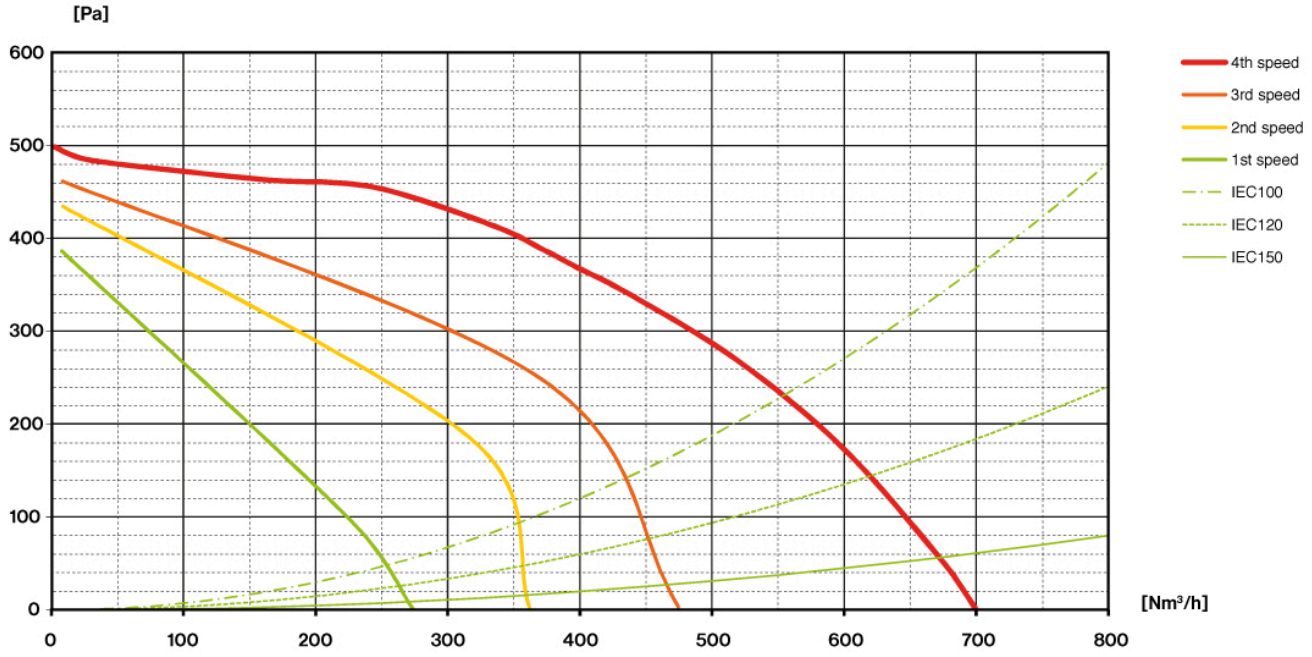

falmec

PLANE TOP

01PL-90-FF Frithængt 90 cm
Fasteel - 800 m3/h

Sortiment
Fasteel

EAN Kode
8034122202907

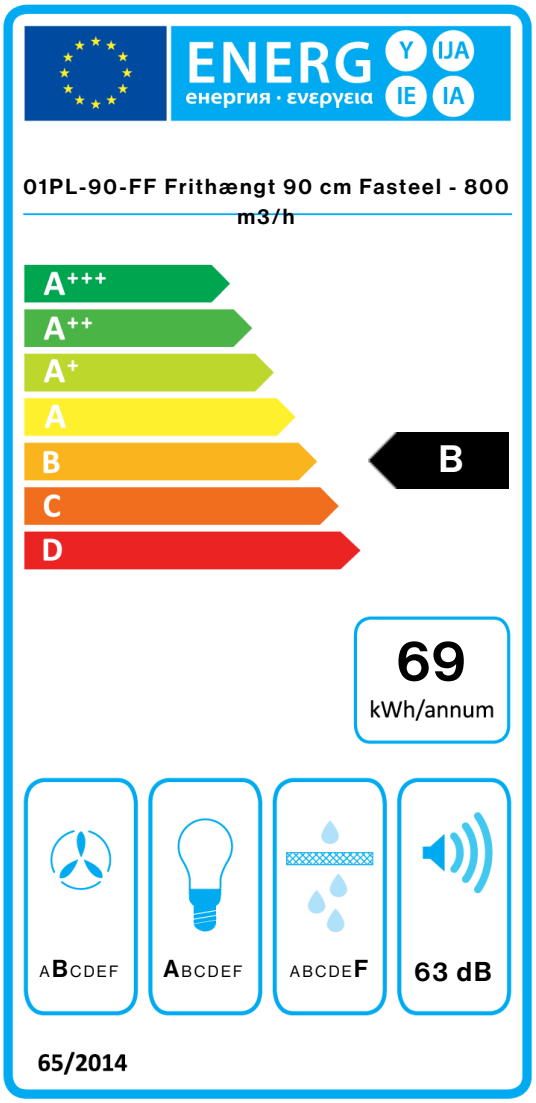

PF		
S	Falmec Spa	
M	01PL-90-FF Frithængt 90 cm Fasteel - 800 m3/h	
AEC	68,6	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m³/h
Qmax	470,0	m³/h
Qboost	660,0	m³/h
SPEmin	53	dBa
SPEmax	63	dBa
SPEboost	70	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	65,1	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	660,0	m³/h
Wbep	147,7	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.