

## PLANE WHITE

01PL-90-VSH Væg 90 cm - Hvid  
- 800 m<sup>3</sup>/h

### Sortiment

White

### EAN Kode

8034122342108



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Hvidlakeret stål

Kantsug

Elektronisk kontrolpanel

LED lys

Vaskbare rustfrie fedtfiltere

Kulfilter

## MULIGHEDER FOR TILVALG

### 01KU-3

Rektangulært kulfilter. Type 3

### 01MO-GAVL

Gavlmotor til udendørs brug

1000 m<sup>3</sup>/h

### 01MO-GAVL-15

Gavlmotor til udendørs brug

1500 m<sup>3</sup>/h

### 01MO-LOFT

Loftmotorer under taget 950

m<sup>3</sup>/h

### 01MO-LOFT-13

Loftmotor 1300 m<sup>3</sup> Ø200 mm

### 101080245

Metallfiltere - Base - 278x301 mm

### KACL.770#41F

Loftmotorer 1100 m<sup>3</sup>/h

Brushless

### KACL.864

Air flow conveyer til recirkulation. Væghængte modeller.

### KACL.948#IF

Filter unit for t-shaped wall hoods

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

90 cm

### Materiale

Hvidlakeret stål

### Motor

800 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

LED 2x1,2 W - 3200 K

### Filter

3 x Metallfiltere - Base - 278x301 mm

### Kulfilter

Rektangulært kulfilter. Type 3 (Tilvalg)

### Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

25 kg

### Nettovægt

20 kg

### Volumen

0.27 m<sup>3</sup>

### Mål på emballage

Længde

995 mm

Højde

450 mm

Dybde

595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

## DATABLAD MOTOR

### Maksimal kapacitet

680 m<sup>3</sup>/h

I.E.C. 61591

### Maksimalt støjniveau

68 dB(A)<sub>re1pW</sub>

I.E.C.60704-2-13

### Maksimalt tryk (Pa)


500 Pa

### Maksimal sugestyrke

215 W

## ENERGIKLASSE

B



## PLANE WHITE

01PL-90-VSH Væg 90 cm - Hvid  
- 800 m<sup>3</sup>/h

### Sortiment

White


### EAN Kode

8034122342108

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

## KAPACITET / TRYK

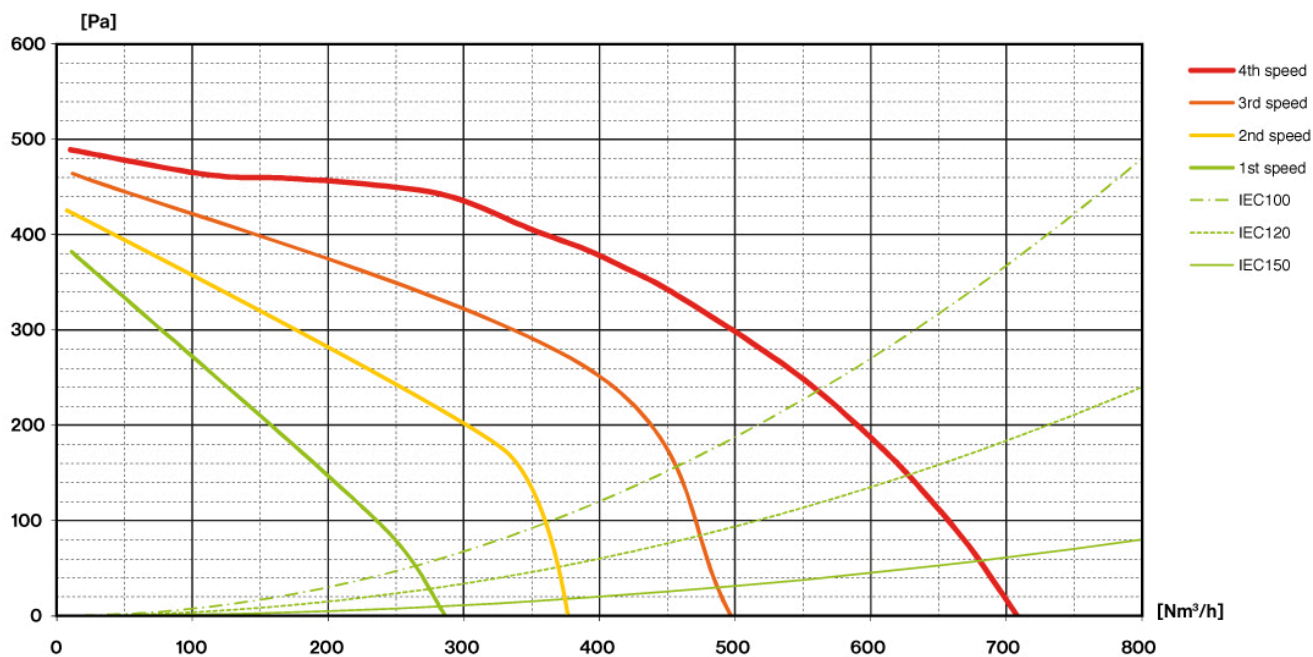

## PLANE WHITE


01PL-90-VSH Væg 90 cm - Hvid  
- 800 m3/h

### Sortiment

White

### EAN Kode

8034122342108

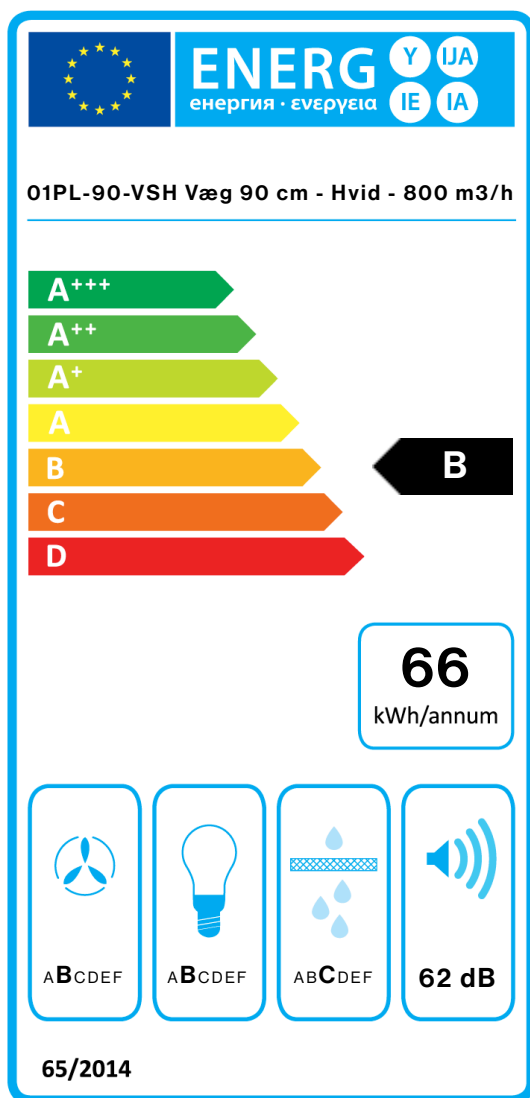

PF		
S	Falmec Spa	
M	01PL-90-VSH Væg 90 cm - Hvid - 800 m3/h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.