

POLAR LIGHT

Versiune

Perete 35 cm - 800 m³/h

Colectie

Design+

Cod EAN

8034122332307



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Control electronic
Iluminare ambientala cu LED
Iluminare cu LED
Filtru de grasime Top, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.770#41F
Motor de acoperis 1100 m³/h
Brushless
KACL.786#41F
Motor de exterior 1000 m³/h
KACL.796#4AF
Motor de exterior 1500 m³/h
KACL.797#4AF
Motor de acoperis 1300 m³/h
KACL.798#41F
Motor de acoperis 950 m³/h
KACL.815
Lavete pentru curatare inox (cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare
De perete
Dimensiuni
35 cm
Finisaj
Inox Scotch Brite (AISI 304)
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
4
Iluminare
LED 3x1,2 W - 3200 K
Lumina ambientala
Banda cu LED 5 W
Filtru de Carbon
Filtru de carbon rotund Ø170 mm - Tip 6 (inclus)
Distanta minima
Plita cu gaz: 60 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM


Greutate bruta
29 kg
Greutate neta
24 kg
Volum
0.3 m³
Dimensiuni ambalaj
Lungime
995 mm
Inaltime
500 mm
Adancime
595 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
710 m³/h
I.E.C. 61591
Nivel de zgomot maxim
67 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
500 Pa
Putere maxima motor
215 W
CLASA DE ENERGIE
B



POLAR LIGHT

Versiune

Perete 35 cm - 800 m³/h

Colectie

Design+

Cod EAN

8034122332307

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13 | 48 | 54 | 61 | 67 |
| Capacitate (m ³ /h) I.E.C.61591 | 290 | 380 | 490 | 710 |
| Presiune maxima (Pa) | 400 | 450 | 480 | 500 |
| Putere motor (W) | 134 | 156 | 180 | 215 |
| Evacuare aer | 150 | 150 | 150 | 150 |

CAPACITATE/ PRESIUNE



POLAR LIGHT

Versiune

Perete 35 cm - 800 m³/h


Colectie

Design+

Cod EAN

8034122332307

ETICHETA DE ENERGIE

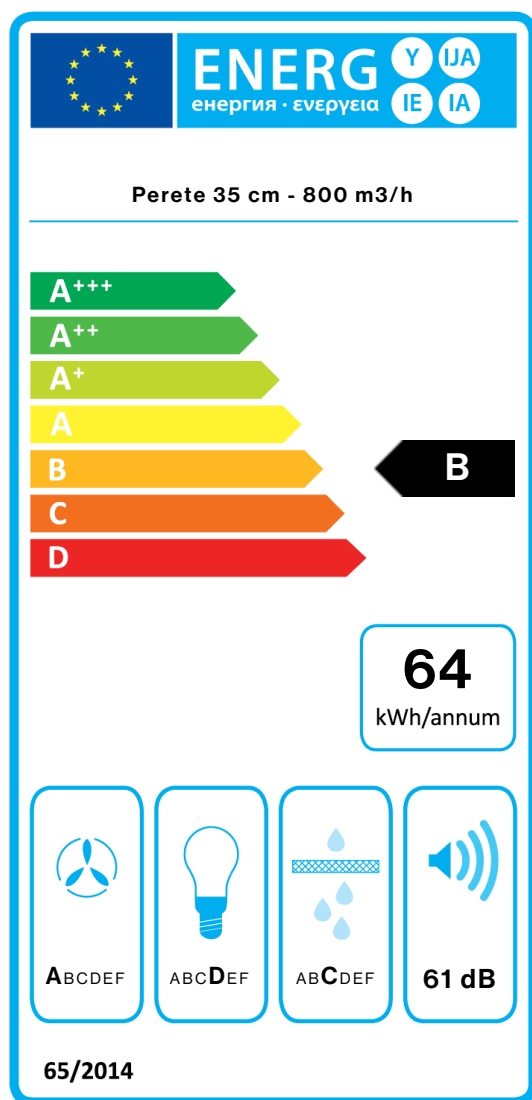

| PF | | |
|------------|--------------------------------------|-------------------|
| S | Falmec Spa | |
| M | Perete 35 cm - 800 m ³ /h | |
| AEC | 63,9 | kWh/a |
| EEC | B | |
| FDE | 28,1 | |
| FDEC | A | |
| LE | 13,7 | |
| LEC | D | |
| GFE | 76,0 | |
| GFEC | C | |
| Qmin | 290,0 | m ³ /h |
| Qmax | 490,0 | m ³ /h |
| Qboost | 710,0 | m ³ /h |
| SPEmin | 48 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 69 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1 | |
| EEl | 60,9 | |
| Qbep | 371,0 | m ³ /h |
| Pbep | 412 | Pa |
| Qboost | 710,0 | m ³ /h |
| Wbep | 151,0 | W |
| WL | 12,00 | W |
| Emiddle | 165 | lex |
| Lwa-SPEmax | 61 | dBa |