

POLAR HVID

01PO-90-VSH Væg 35 cm -
Hvid - 800 m³/h

Sortiment

Design

EAN Kode

8034122342146



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Elektronisk kontrolpanel

LED lys

Vaskbare rustfrie fedtfiltere

Kulfilter

MULIGHEDER FOR TILVALG

01KU-6

Rundt kulfilter Ø170 mm. Type 6

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

35 cm

Materiale

Hvidlakeret stål

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 3x1,2 W - 3200 K

Filter

Metallfiltre - Base - 235x245 mm

(Hvidt)

Kulfilter

Rundt kulfilter Ø170 mm. Type 6

(Tilvalg)

Minimumsafstand

Gaskomfur: 60 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

20.4 kg

Nettovægt

16.4 kg

Volumen

0.3 m³

Mål på emballage

Længde

995 mm

Højde

500 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATA BLAD MOTOR

Maksimal kapacitet

710 m³/h

I.E.C. 61591

Maksimalt støjniveau

67 dB(A)_{re1pW}

I.E.C.60704-2-13

Maksimalt tryk (Pa)


500 Pa

Maksimal sugestyrke

215 W

ENERGIKLASSE

B



POLAR HVID

01PO-90-VSH Væg 35 cm -
Hvid - 800 m³/h

Sortiment

Design


EAN Kode

8034122342146

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	48	54	61	67
Kapacitet (m ³ /h) I.E.C.61591	290	380	490	710
Maksimalt tryk (Pa)	400	450	480	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

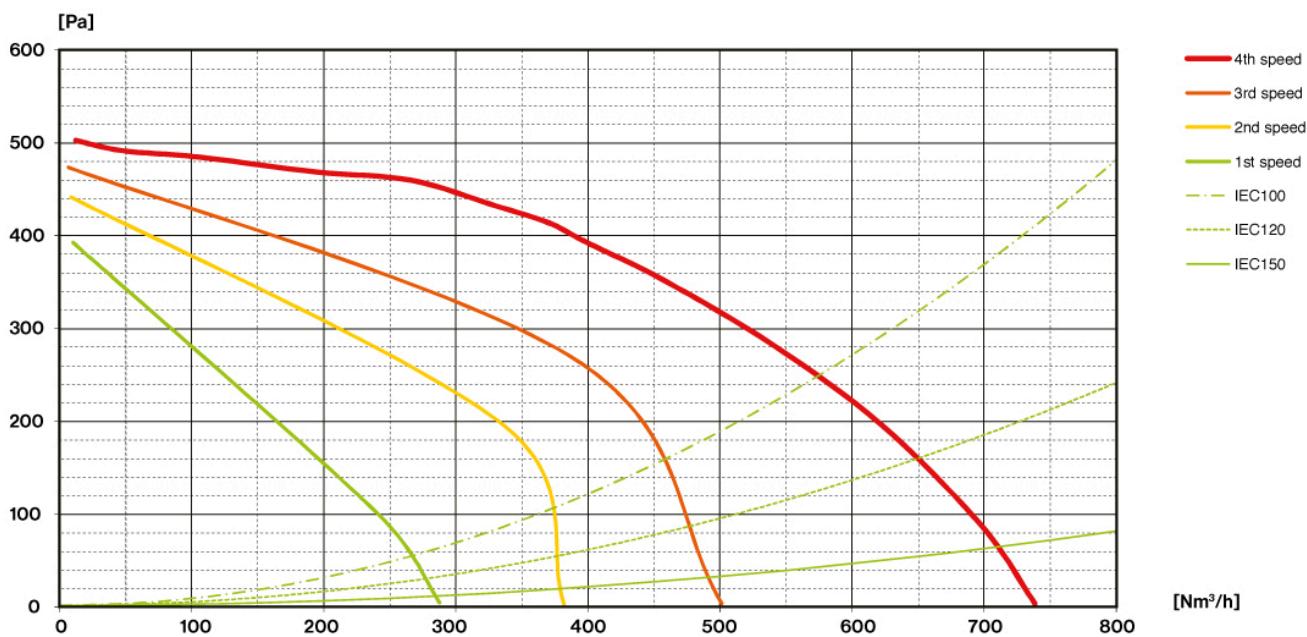

POLAR HVID


01PO-90-VSH Væg 35 cm -
Hvid - 800 m³/h

Sortiment

Design

EAN Kode

8034122342146

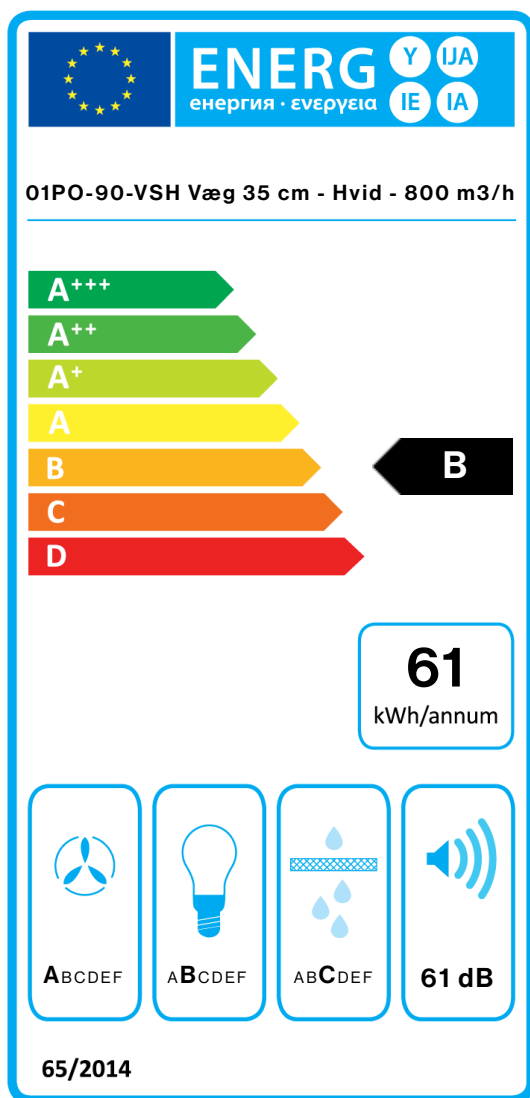

PF		
S	Falmec Spa	
M	01PO-90-VSH Væg 35 cm - Hvid - 800 m ³ /h	
AEC	61,4	kWh/a
EEC	B	
FDE	28,1	
FDEC	A	
LE	24,2	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	290,0	m ³ /h
Qmax	490,0	m ³ /h
Qboost	710,0	m ³ /h
SPEmin	48	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	59,6	
Qbep	371,0	m ³ /h
Pbep	412	Pa
Qboost	710,0	m ³ /h
Wbep	151,0	W
WL	8,60	W
Emiddle	208	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.