

PRESTIGE

Version

Wall 65 cm - White - 800 m3/h

Collection

Design+

EAN code

8034122329109



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Electronic control
LED ambient light
LED lighting
Top filter, removable and washable
Charcoal filter included
Possible to duct wall mounted from rear

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless

KACL.786#41F
Outdoor extractor fan 1000 m3/h

KACL.796#4AF
Outdoor extractor fan 1500 m3/h

KACL.797#4AF
Remote under-roof motor 1300 m3/h

KACL.798#41F
Remote under-roof motor 950 m3/h

KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)

TECHNICAL FEATURES

Installation type
Wall

Dimensions
65 cm

Finishing
Scotch brite stainless steel (AISI 304)

Shaped glass and tempered white

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Led 4x1,2 W - 4200 K

Ambient lighting
Led strip 7 W - 4200 K

Filter
Metallic filter "Top" - 338x216 mm

Charcoal filter
Round charcoal filter Ø170 mm - Type 6 (optional)

Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
27 kg

Net weight
22 kg

Volumes
0.29 m³

Packaging size
Length
995 mm
Height
490 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Voltage
220-240V

Frequency
50-60Hz

Plug type
Shuko

MOTOR TECHNICAL SHEET


Maximum capacity
680 m³/h
I.E.C. 61591

Maximum noise level
68 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
510 Pa

Max. motor power
224 W

ENERGY CLASS
B



PRESTIGE

Version

Wall 65 cm - White - 800 m³/h

Collection

Design+


EAN code

8034122329109

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Noise level dB(A) _{re1pW-I.E.C.60704-2-13} | 54 | 57 | 63 | 68 |
| Capacity (m ³ /h) I.E.C.61591 | 270 | 370 | 490 | 680 |
| Maximum pressure (Pa) | 390 | 440 | 490 | 510 |
| Motor Power (W) | 130 | 150 | 178 | 224 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

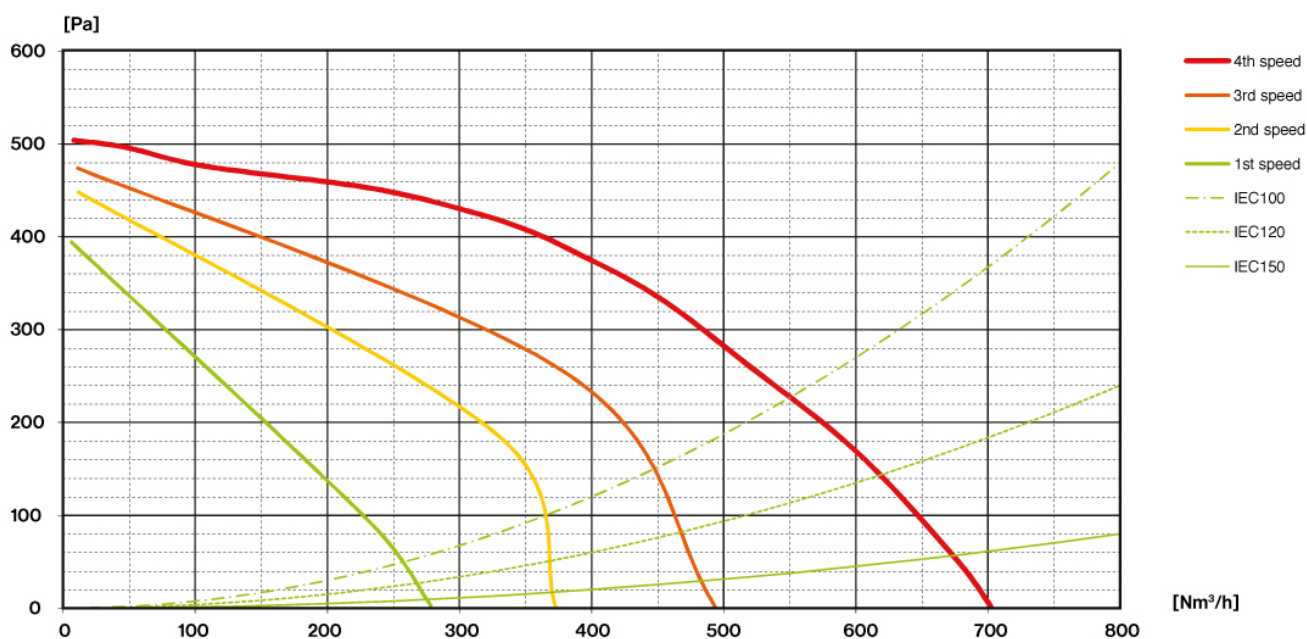

PRESTIGE

Version

Wall 65 cm - White - 800 m³/h


Collection

Design+

EAN code

8034122329109

ENERGY LABEL

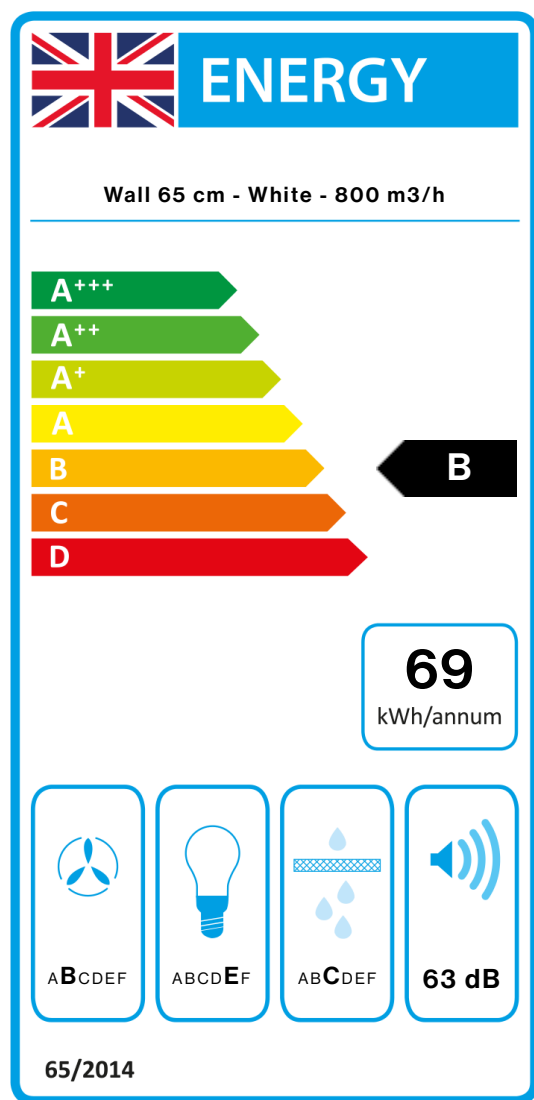

| PF | | |
|------------|--|-------------------|
| S | Falmec Spa | |
| M | Wall 65 cm - White - 800 m ³ /h | |
| AEC | 68,7 | kWh/a |
| EEC | B | |
| FDE | 26,6 | |
| FDEC | B | |
| LE | 9,4 | |
| LEC | E | |
| GFE | 79,0 | |
| GFEC | C | |
| Qmin | 270,0 | m ³ /h |
| Qmax | 490,0 | m ³ /h |
| Qboost | 680,0 | m ³ /h |
| SPEmin | 54 | dBa |
| SPEmax | 63 | dBa |
| SPEboost | 68 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1 | |
| EEL | 63,3 | |
| Qbep | 357,0 | m ³ /h |
| Pbep | 404 | Pa |
| Qboost | 680,0 | m ³ /h |
| Wbep | 150,6 | W |
| WL | 18,80 | W |
| Emiddle | 176 | lux |
| Lwa-SPEmax | 63 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.