

## PRESTIGE

### Version

Wall 65 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122329116



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

**Scotch brite stainless steel (AISI 304)**  
**Shaped glass and tempered black**  
**Electronic control**  
**LED ambient light**  
**LED lighting**  
**Top filter, removable and washable**  
**Charcoal filter included**  
**Possible to duct wall mounted from rear**

## OPTIONAL ACCESSORIES

**KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)  
**KACL.798#41F**  
Remote under-roof motor 950 m<sup>3</sup>/h  
**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless  
**KACL.786#41F**  
Outdoor extractor fan 1000 m<sup>3</sup>/h  
**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h  
**KACL.797#4AF**  
Remote under-roof motor 1300 m<sup>3</sup>/h

## TECHNICAL FEATURES

**Installation type**  
Wall  
**Dimensions**  
65 cm  
**Finishing**  
Scotch brite stainless steel (AISI 304)  
**Shaped glass and tempered black**  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Electronic control  
**Speed settings**  
4  
**Lighting**  
Led 4x1,2 W - 4200 K  
**Ambient lighting**  
Led strip 7 W - 4200 K  
**Filter**  
Metallic filter "Top" - 338x216 mm - 2 pz  
**Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6  
**Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES


**Gross weight**  
27.00 kg  
**Net weight**  
22.00 kg  
**Volume**  
0.29 m<sup>3</sup>  
**Packaging size**  
Length  
995 mm  
Height  
595 mm  
Depth  
490 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W  
**Voltage / Frequency**  
220-240V  
50-60Hz  
**Plug type**  
Shuko

## MOTOR TECHNICAL SHEET

**Maximum capacity**  
680 m<sup>3</sup>/h  
I.E.C. 61591  
**Maximum noise level**  
68 dB(A)re1pW  
I.E.C.60704-2-13  
**Maximum pressure (Pa)**  
510 Pa  
**Max. motor power**  
224 W  
**ENERGY CLASS**  
B



## PRESTIGE

### Version

Wall 65 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122329116

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	54	57	63	68
Capacity (m3/h) I.E.C.61591 Normalized Pipes	270	370	490	680
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

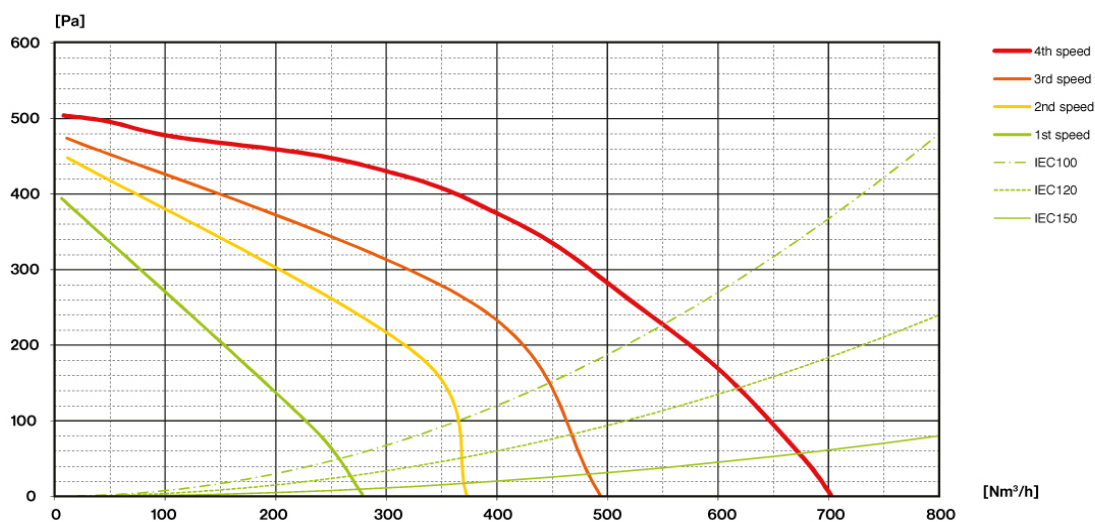

## PRESTIGE

### Version

Wall 65 cm - Black - 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122329116

## ENERGY LABEL

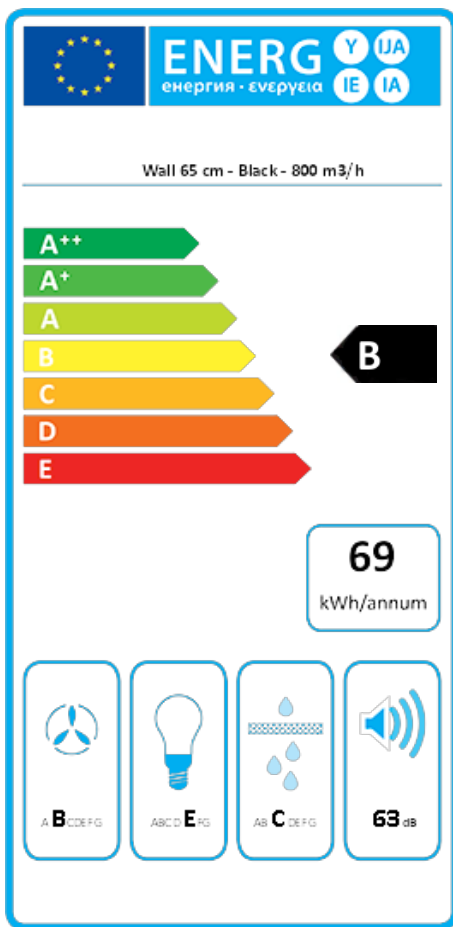

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Wall 65 cm - Black - 800 m <sup>3</sup> /h	
<b>AEC</b>	68,7	kWh/a
<b>ECC</b>	B	
<b>FDE</b>	26,6	
<b>FDEC</b>	B	
<b>LE</b>	9,4	
<b>LEC</b>	E	
<b>GFE</b>	79,0	
<b>GFEC</b>	C	
<b>Qmin</b>	270,0	m <sup>3</sup> /h
<b>Qmax</b>	490,0	m <sup>3</sup> /h
<b>Qboost</b>	680,0	m <sup>3</sup> /h
<b>SPEmin</b>	54	dBa
<b>SPEmax</b>	63	dBa
<b>SPEboost</b>	68	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	1,0	
<b>EEl</b>	63,3	
<b>Qbep</b>	357,0	m <sup>3</sup> /h
<b>Pbep</b>	404	Pa
<b>Qboost</b>	680,0	m <sup>3</sup> /h
<b>Wbep</b>	150,6	W
<b>WL</b>	18,80	W
<b>Emiddle</b>	176	lux
<b>Lwa-SPEmax</b>	63	dBA

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.