

## QUASAR

### Version

Wall 60 cm - White - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122353975



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Perimeter suction**  
**Touch control + 24 h function**  
**Metallic grease filter, removable and washable**  
**Charcoal filter included**  
**Possible to duct wall mounted from rear**  
**Optional Chimney**  
**Dynamic LED Light (2700K - 5600K)**

## OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

**KACL.786#41F**  
Outdoor extractor fan 1000 m<sup>3</sup>/h

**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h

**KACL.797#4AF**  
Remote under-roof motor 1300 m<sup>3</sup>/h

**KACL.798#41F**  
Remote under-roof motor 950 m<sup>3</sup>/h

**KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)

**KACL.941**  
External filter unit for sloped hoods

**KCQAN.00#I**  
Chimney (Inox)

## TECHNICAL FEATURES

**Installation type**  
Wall

**Dimensions**  
60 cm

**Finishing**  
White tempered glass finishing  
Scotch brite stainless steel

**Motor**  
800 m<sup>3</sup>/h

**Type of control**  
Touch control

**Speed settings**  
4

**Lighting**  
Led 2x1,2 W - 3200 K

**Filter**  
2 x Metallic filter "Base" - 278x301 mm

**Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6 (optional)

**Minimum distance**  
Gas hob: 57 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
31 kg

**Net weight**  
26 kg

**Volumes**  
0.3 m<sup>3</sup>

**Packaging size**  
Length  
775 mm  
Height  
550 mm  
Depth  
705 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
280 W

**Voltage**  
220-240V

**Frequency**  
50-60Hz

**Plug type**  
Shuko

## MOTOR TECHNICAL SHEET



**Maximum capacity**  
750 m<sup>3</sup>/h  
I.E.C. 61591

**Maximum noise level**  
66 dB(A)re1pW  
I.E.C.60704-2-13

**Maximum pressure (Pa)**  
510 Pa

**Max. motor power**  
224 W

**ENERGY CLASS**  
A



Rear view

## QUASAR

### Version

Wall 60 cm - White - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122353975

## MOTOR TECHNICAL SHEET

| Motor speed  | 1   | 2   | 3   | 4   |
|--|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 46  | 53  | 58  | 66  |
| Capacity (m <sup>3</sup> /h)<br>I.E.C.61591            | 295 | 390 | 500 | 750 |
| Maximum pressure (Pa)                                  | 390 | 440 | 490 | 510 |
| Motor Power (W)  | 130 | 150 | 178 | 224 |
| Air outlet   | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE

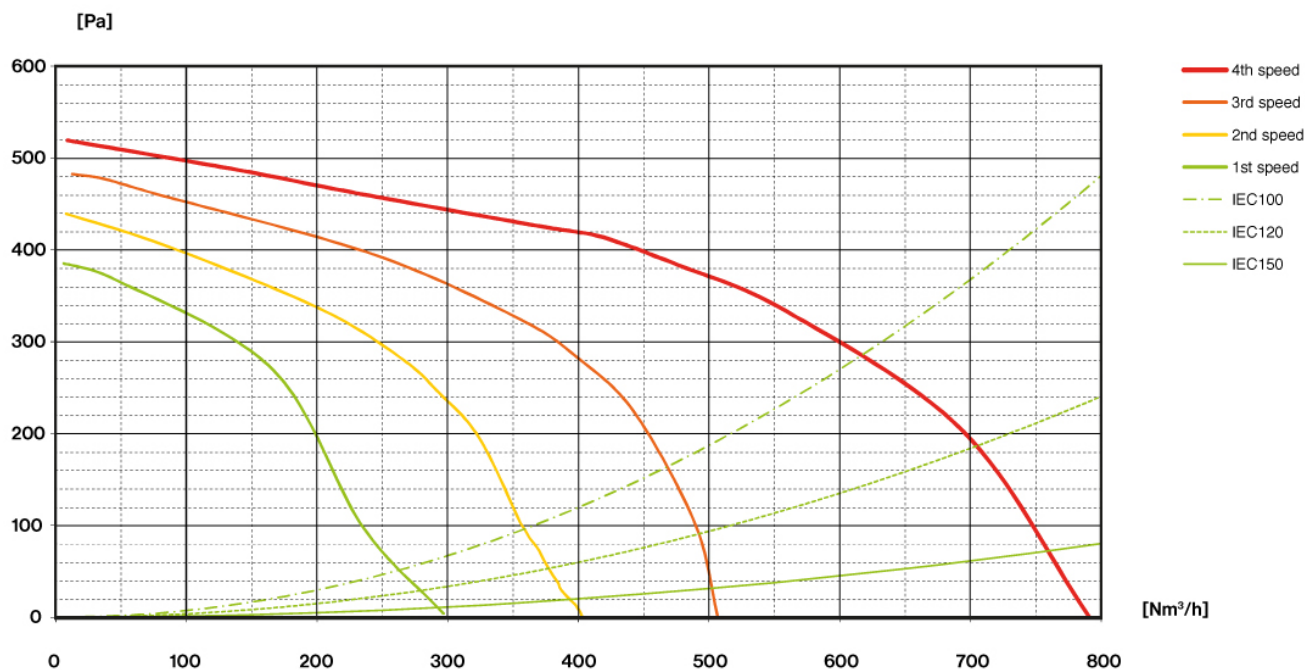

## QUASAR

### Version

Wall 60 cm - White - 800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122353975

## ENERGY LABEL

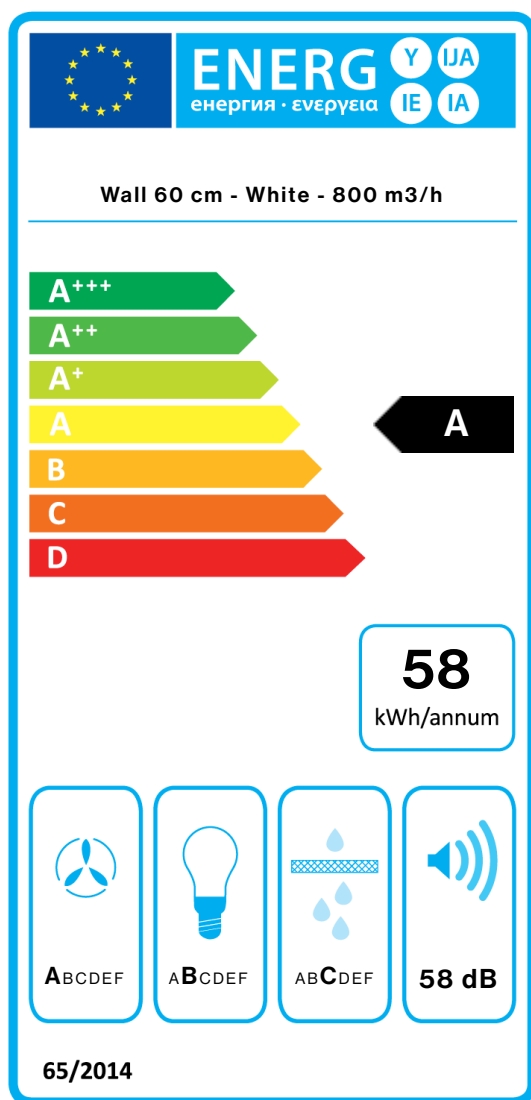

| PF         |  |                   |
|------------|--|-------------------|
| S          | Falmec Spa                                 |                   |
| M          | Wall 60 cm - White - 800 m <sup>3</sup> /h |                   |
| AEC        | 57,7                                       | kWh/a             |
| EEC        | A  |                   |
| FDE        | 29,4                                       |                   |
| FDEC       | A  |                   |
| LE         | 21,6                                       |                   |
| LEC        | B  |                   |
| GFE        | 76,0                                       |                   |
| GFEC       | C  |                   |
| Qmin       | 295,0                                      | m <sup>3</sup> /h |
| Qmax       | 500,0                                      | m <sup>3</sup> /h |
| Qboost     | 750,0                                      | m <sup>3</sup> /h |
| SPEmin     | 46   | dBa               |
| SPEmax     | 58   | dBa               |
| SPEboost   | 66   | dBa               |
| PO         | -  | W                 |
| PS         | 0,48                                       | W                 |
| PI         |  |                   |
| F          | 0.9  |                   |
| EEl        | 53,2                                       |                   |
| Qbep       | 430,0                                      | m <sup>3</sup> /h |
| Pbep       | 404  | Pa                |
| Qboost     | 750,0                                      | m <sup>3</sup> /h |
| Wbep       | 164,0                                      | W                 |
| WL         | 5,30                                       | W                 |
| Emiddle    | 114  | lx                |
| Lwa-SPEmax | 58   | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.