

QUASAR

Version

Wall - 60 cm - White - 800 m³/h

Designer

Collection

Design

EAN code

8034122353975

FEATURES

Perimeter suction
 Touch control + 24 h function
 Metallic grease filter, removable and washable
 Combined regenerable
 Carbon.Zeo filter (optional)
 Charcoal filter
 Possible to duct wall mounted from rear
 Optional Chimney
 Dynamic Light (2700K - 5600K)

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.865

Air flow conveyor for re-circulation version (Wall)

KACL.941

External Carbon.Zeo filter unit for sloped hoods

KCQAN.00#B

Optional chimney - White

KCQAN.00#I

Chimney - Inox

TECHNICAL FEATURES

Installation type

Wall

Dimensions

60 cm

Finishing

White tempered glass finishing

Motor

800 m³/h

Type of control

Touch control

Speed

3 + boost

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Filter

2 x Metallic filter "Base" - 278x301 mm

Charcoal filter

Round charcoal filter Ø170 mm - Type 6 (optional)

Minimum distance

Gas hob: 57 cm

Electric hob: 52 cm



Photograph is for information purposes only
 It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

31 kg

Net weight

26 kg

Volumes

0.3 m³

Packaging size

Length

775 mm

Height

550 mm

Depth

705 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

750 m³/h

I.E.C. 61591

Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)



510 Pa

Max. motor power

224 W

ENERGY CLASS

A



Rear view

QUASAR

Version

Wall - 60 cm - White - 800
m3/h

Designer

Collection

Design


EAN code

8034122353975

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

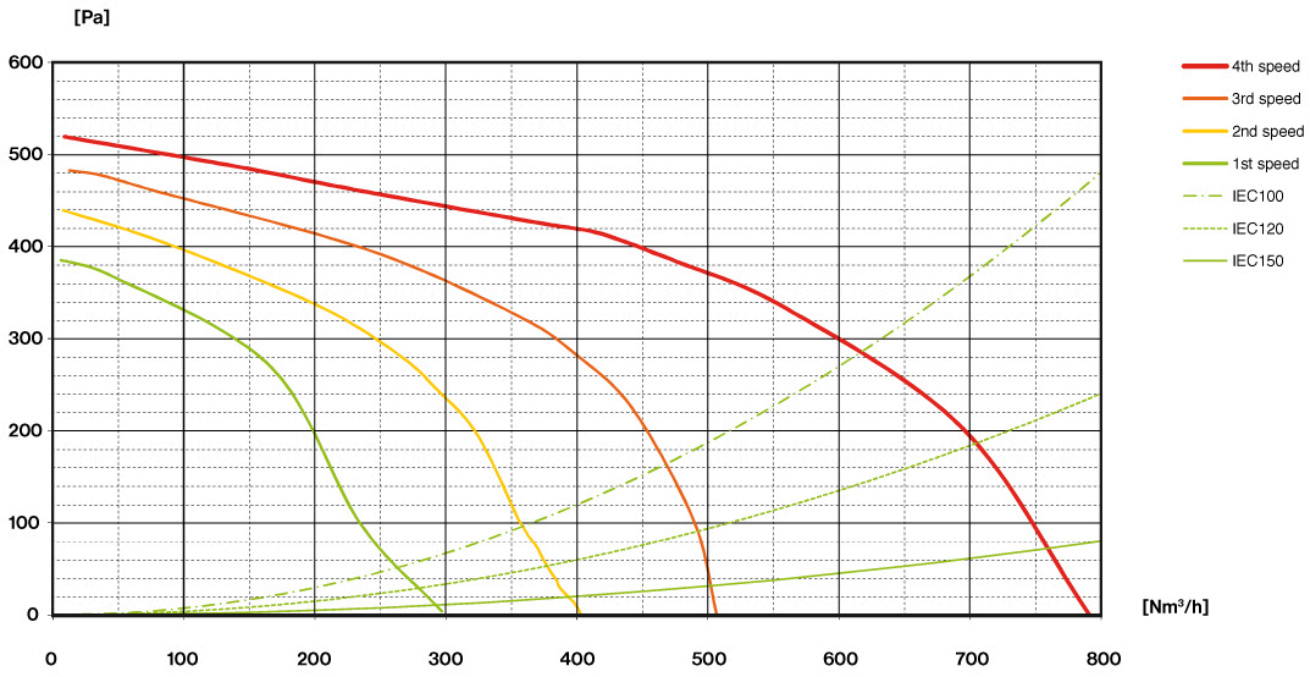

QUASAR

Version

Wall - 60 cm - White - 800 m3/h

Designer


Collection

Design

EAN code

8034122353975

ENERGY LABEL

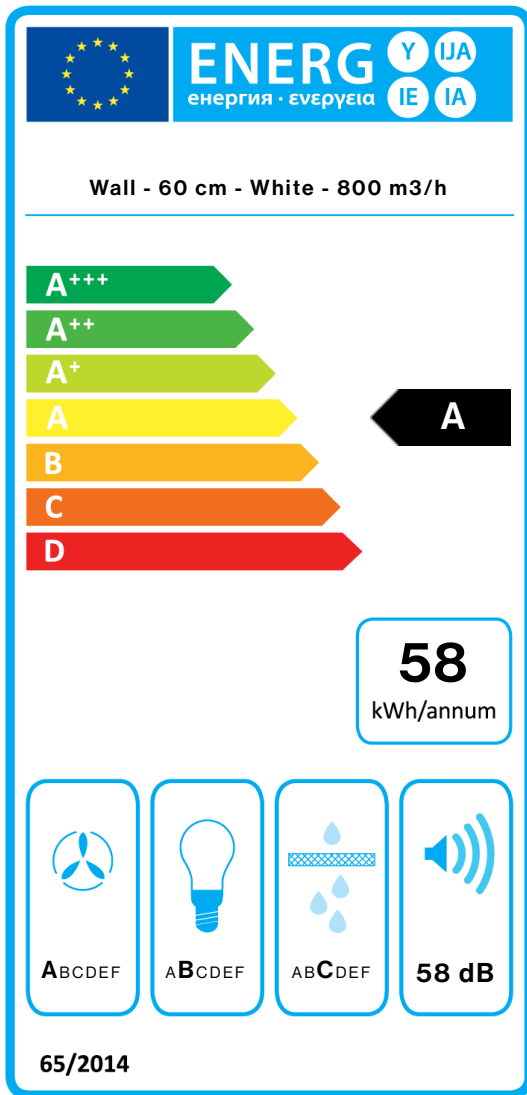

PF		
S	Falmec Spa	
M	Wall - 60 cm - White - 800 m3/h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	53,2	
Qbep	430,0	m ³ /h
Pbep	404	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.