

## QUASAR

### Version

Wall - 60 cm - White - 800 m<sup>3</sup>/h

### Designer

### Collection

Design

### EAN code

8034122353975

## FEATURES

Perimeter suction  
 Touch control + 24 h function  
 Metallic grease filter, removable and washable  
 Combined regenerable  
 Carbon.Zeo filter (optional)  
 Charcoal filter  
 Possible to duct wall mounted from rear  
 Optional Chimney  
 Dynamic Light (2700K - 5600K)

## OPTIONAL ACCESSORIES

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.865

Air flow conveyor for re-circulation version (Wall)

### KACL.941

External Carbon.Zeo filter unit for sloped hoods

### KCQAN.00#B

Optional chimney - White

### KCQAN.00#I

Chimney - Inox

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

60 cm

### Finishing

White tempered glass finishing

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed

3 + boost

### Lighting

Led 2x1,2 W - 2700 K / 5600 K

### Filter

2 x Metallic filter "Base" - 278x301 mm

### Charcoal filter

Round charcoal filter Ø170 mm - Type 6 (optional)

### Minimum distance

Gas hob: 57 cm

Electric hob: 52 cm



Photograph is for information purposes only  
 It may not correspond to the selected version.

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

31 kg

### Net weight

26 kg

### Volumes

0.3 m<sup>3</sup>

### Packaging size

Length

775 mm

Height

550 mm

Depth

705 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

750 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)



510 Pa

### Max. motor power

224 W

## ENERGY CLASS

A



Rear view

## QUASAR

### Version

Wall - 60 cm - White - 800  
m3/h

### Designer

### Collection

Design


### EAN code

8034122353975

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

# CAPACITY / PRESSURE

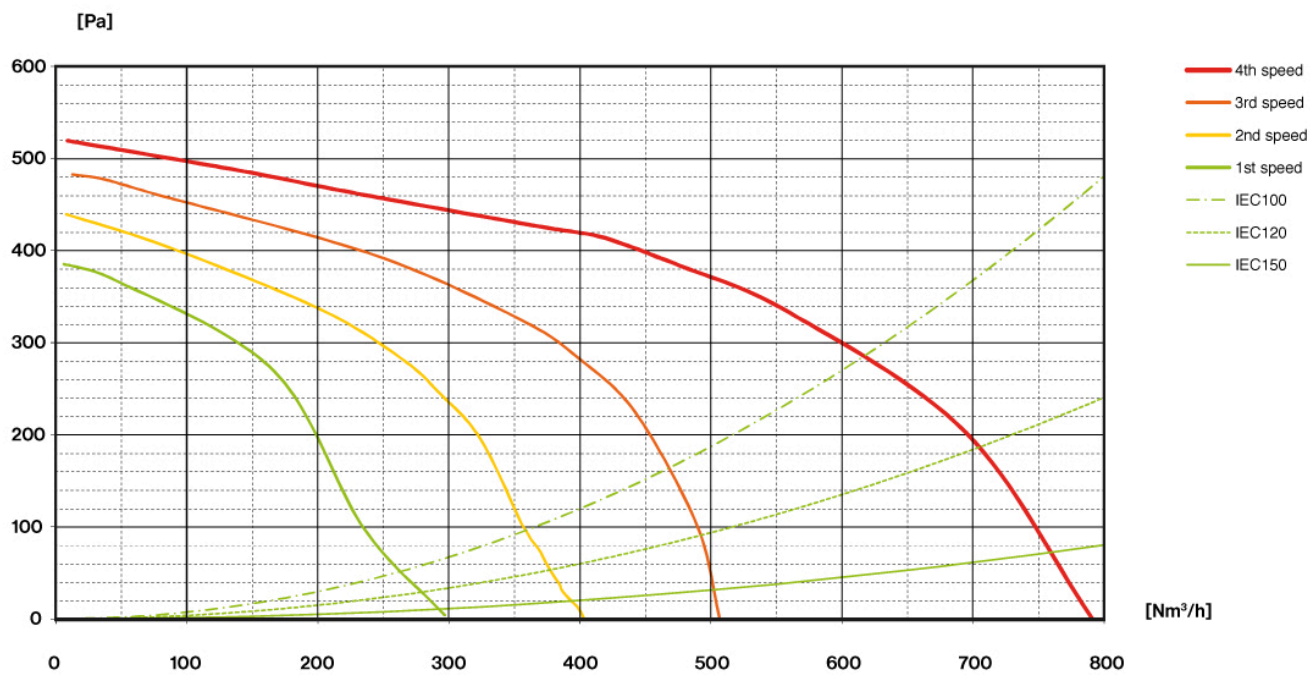

## QUASAR

### Version

Wall - 60 cm - White - 800 m3/h

### Designer


### Collection

Design

### EAN code

8034122353975

## ENERGY LABEL

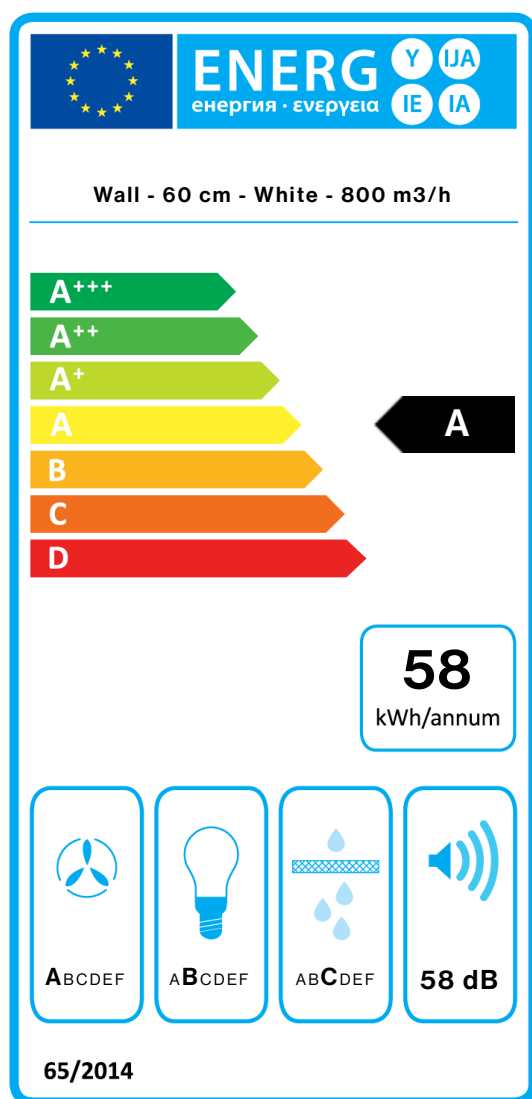

PF		
S	Falmec Spa	
M	Wall - 60 cm - White - 800 m3/h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	295,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	750,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	53,2	
Qbep	430,0	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	750,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point /

Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.