

## QUASAR

Seinä 60 cm, valkoinen 800 m<sup>3</sup>/h

Design

8034122353975



The photograph is purely for information  
It may not correspond to the selected version.

### OMINAISUUDET

**Reunaimu**  
**Hipaisukytkimet + 24 H toiminto**  
**Metalliset rasvasuodattimet, irroitettavat ja pestävät**  
**Lisävarusteena uudelleen aktivoitava Carbon.Zeo suodatin**  
**Aktiivihiiლისuodatin vakiovarusteena**  
**Mahdollista asentaa seinän läpi**  
**Hormiputken suoja lisävarusteena**  
**Säädettävä LED valosävy (2700 - 5600 K)**

### OPTIONAL ACCESSORIES

**KACL.815**  
RST puhdistuspyyhkeet  
**KACL.865**  
Seinä  
**KACL.941**  
Viistotuulettimeen suodatin kit  
**KCQAN.00#B**  
Hormiputkensuoja (valkoinen)  
**KCQAN.00#I**  
Hormiputkensuoja (RST)

### TECHNICAL FEATURES

**Installation type**  
Seinä  
**Dimensions**  
60 cm  
**Viimeistelystä**  
Valkoinen karkaistu lasi  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Hipaisukytkimet  
**Speed settings**  
3 + boost  
**Lighting**  
Led 2x1,2 W - 2700 K / 5600 K  
**Filter**  
2 x Metallic filter "Base" - 278x301 mm  
**Charcoal filter**  
Pyöreä aktiivisuodatin Ø170mm - Type 6 ( )  
: 57 cm  
: 52 cm

### PACKAGING: WEIGHTS AND VOLUMES



31 kg  
26 kg  
0.3 m<sup>3</sup>  
775 mm  
550 mm  
705 mm

### CONSUMPTION AND CONNECTION FEATURES

280 W  
220-240V  
50-60Hz  
Shuko

### MOTOR TECHNICAL SHEET

750 m<sup>3</sup>/h  
I.E.C. 61591  
66 dB(A)re1pW  
I.E.C.60704-2-13  
510 Pa  
224 W  
A



Rear view

## QUASAR


Seinä 60 cm, valkoinen 800  
m<sup>3</sup>/h

Design

8034122353975

### MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
<b>dB(A)re1pW-I.E.C.60704-2-13</b>	<b>46</b>	<b>53</b>	<b>58</b>	<b>66</b>
<b>(m<sup>3</sup>/h)</b>	<b>295</b>	<b>390</b>	<b>500</b>	<b>750</b>
<b>I.E.C.61591</b>	<b>390</b>	<b>440</b>	<b>490</b>	<b>510</b>
	<b>130</b>	<b>150</b>	<b>178</b>	<b>224</b>
	<b>150</b>	<b>150</b>	<b>150</b>	<b>150</b>

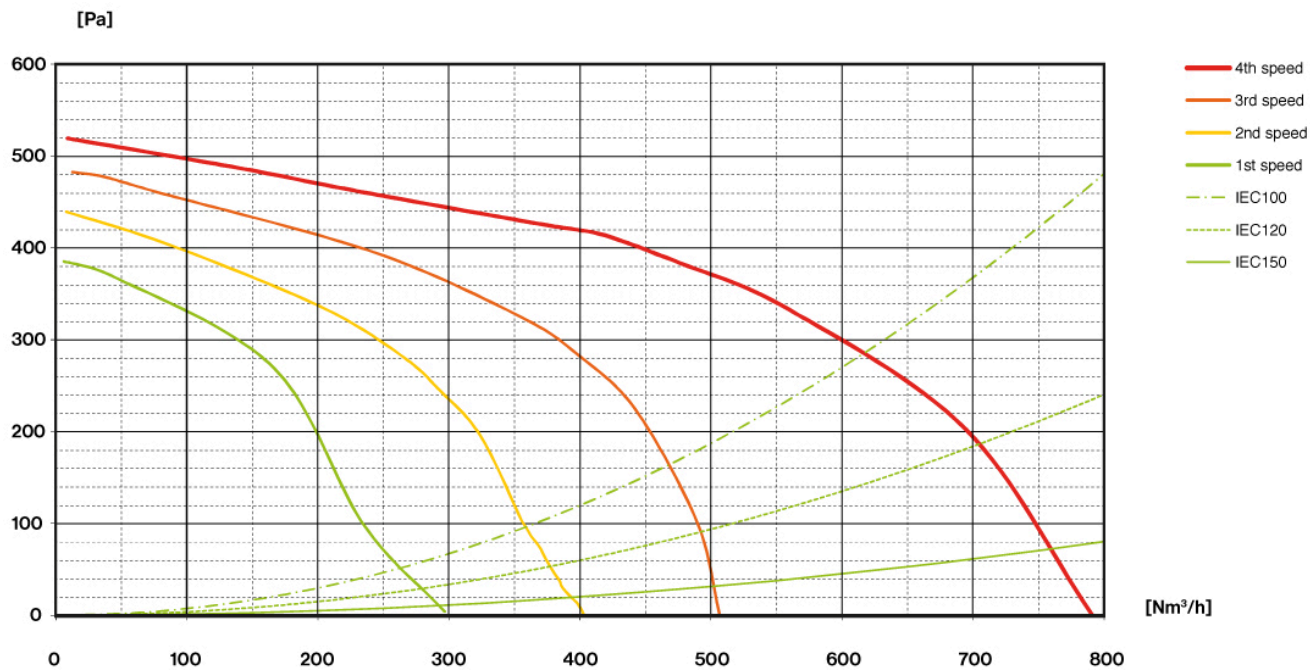


## QUASAR

Seinä 60 cm, valkoinen 800 m<sup>3</sup>/h

Design

8034122353975

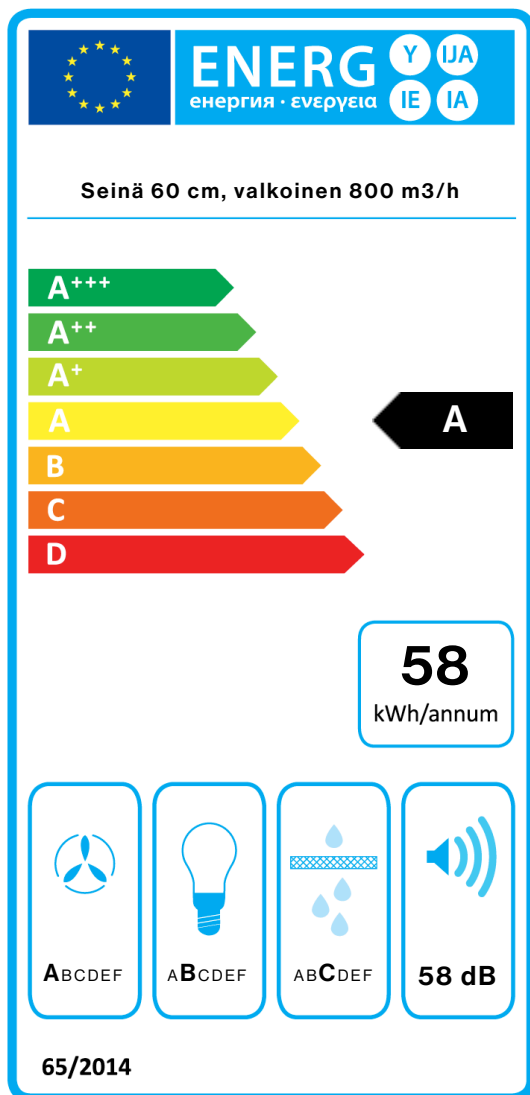

PF		
S	Falmec Spa	
M	Seinä 60 cm, valkoinen 800 m <sup>3</sup> /h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	295,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	750,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	53,2	
Qbep	430,0	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	750,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.