

QUASAR

Versiune

Perete 60 cm - Alb - 800 m³/h

Colectie

Design

Cod EAN

8034122353975



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Aspiratie perimetrala
Touch control + functia 24 h
Filtru de grasime metalic, detasabil si lavabil
Optional - filtru combinat Carbon.Zeo, regenerabil
Filtru de carbon inclus
Posibilitatea de a conecta la tubulatură prin partea din spate
Optional - masca pentru tubulatura
Dynamic LED Light (2700K - 5600K)

ACCESORII OPTIONALE

KACL.815
Lavete pentru curatare inox (cutie 10 buc)
KACL.865
Conveier de aer pentru verisunea in recirculare (Perete)
KACL.941
External Carbon.Zeo filter unit for sloped hoods
KCQAN.00#B
Optional Chimney (White)
KCQAN.00#I
Masca pentru tubulatura (Inox)

CARACTERISTICI TEHNICE

Tip de instalare
De perete
Dimensiuni
60 cm
Finisaj
Sticla tratata termic cu finisaj alb
Motor
800 m³/h
Tipul panoului de control
Touch control
Setari de viteza
3 + boost
Illuminare
Led 2x1,2 W - 2700 K / 5600 K
Filtru
2 x Filtru metalic "Base" - 278x301 mm
Filtru de Carbon
Filtru de carbon rotund Ø170 mm - Tip 6 (optional)
Distanta minima
Plita cu gaz: 57 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM



Greutate bruta
31 kg
Greutate neta
26 kg
Volum
0.3 m³
Dimensiuni ambalaj
Lungime
775 mm
Inaltime
550 mm
Adancime
705 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
750 m³/h
I.E.C. 61591
Nivel de zgomot maxim
66 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
510 Pa
Putere maxima motor
224 W
CLASA DE ENERGIE
A



Rear view

QUASAR

Versiune

Perete 60 cm - Alb - 800 m³/h

Colectie

Design


Cod EAN

8034122353975

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A) _{re1pW-I.E.C.60704-2-13}	46	53	58	66
Capacitate (m ³ /h) I.E.C.61591	295	390	500	750
Presiune maxima (Pa)	390	440	490	510
Putere (W)	130	150	178	224
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

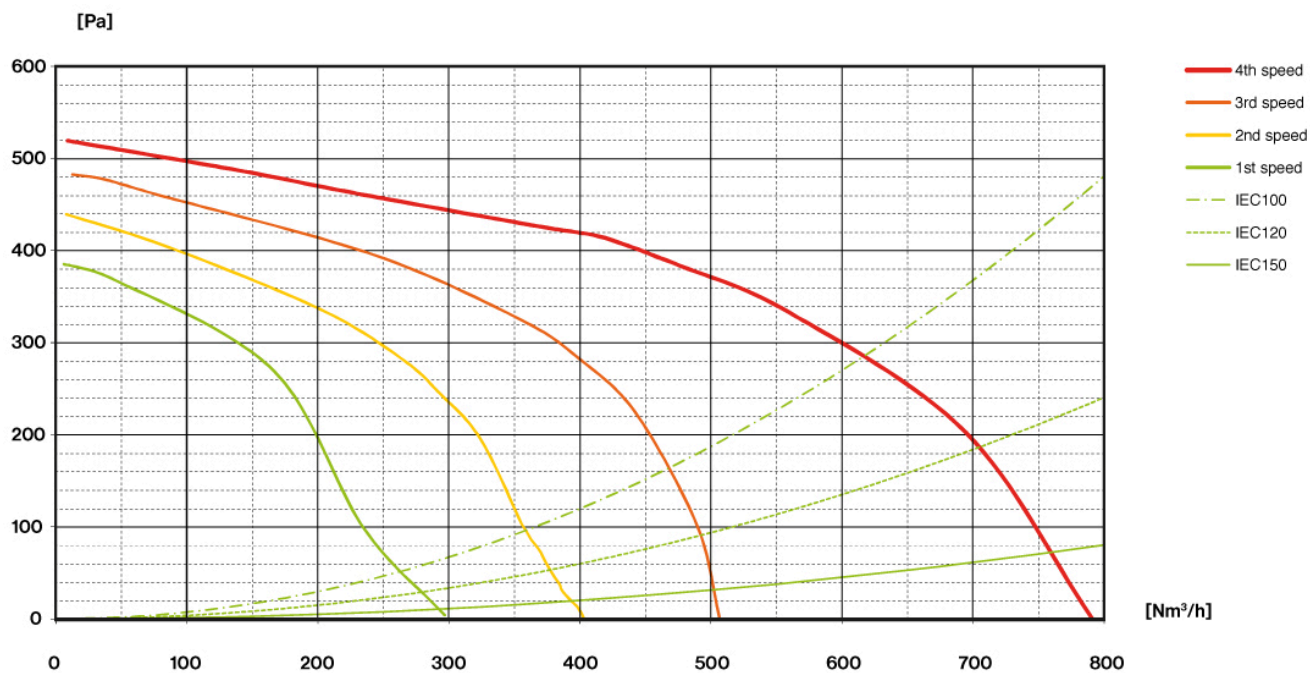

QUASAR

Versiune

Perete 60 cm - Alb - 800 m³/h


Colectie

Design

Cod EAN

8034122353975

ETICHETA DE ENERGIE

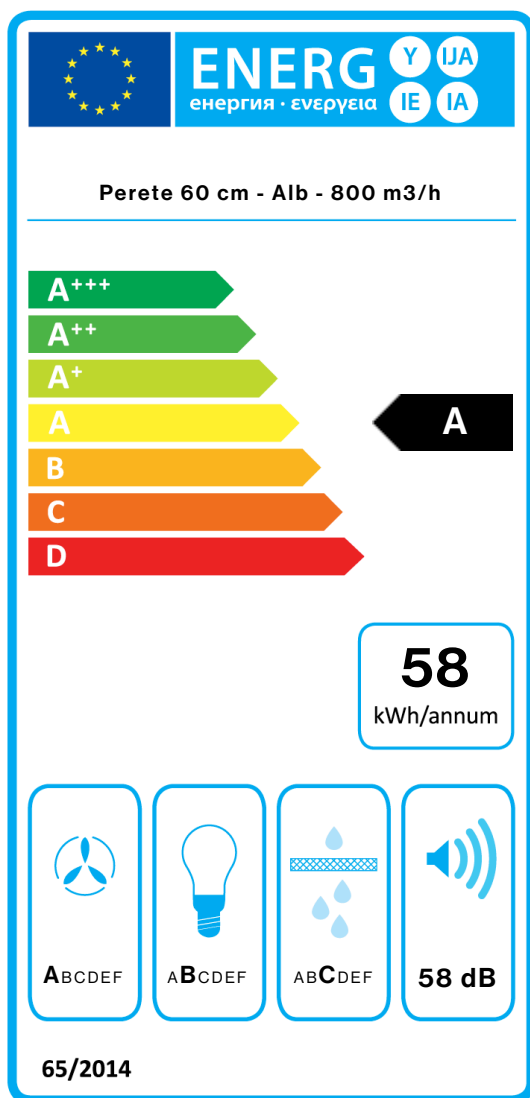

PF		
S	Falmec Spa	
M	Perete 60 cm - Alb - 800 m ³ /h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	53,2	
Qbep	430,0	m ³ /h
Pbep	404	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.