

## SKEMA

### Version

Remote under-roof motor 1300 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122360966

## FEATURES

Perimeter suction  
Electronic control  
LED lighting  
Metallic grease filter, removable and washable  
Remote control included  
Dynamic LED Light (2700K - 5600K)  
Tempered glass

## OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h

**KACL.786#41F**  
Outdoor extractor fan 1000 m<sup>3</sup>/h

**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h

**KACL.797#4AF**  
Remote under-roof motor 1300 m<sup>3</sup>/h

**KACL.798#41F**  
Remote under-roof motor 950 m<sup>3</sup>/h

**KACL.939#BF**  
Ceiling re-circulation filtering kit (only for Slim Motor)

## TECHNICAL FEATURES

**Installation type**  
Ceiling

**Dimensions**  
120 cm

**Finishing**  
Painted white steel

**Type of control**  
Electronic control

**Speed settings**  
4

**Lighting**  
All surface 43 W (2700-5600 K)

**Maximum distance**  
Gas hob: 150 cm  
Electric hob: 150 cm



*The photograph is purely for information  
It may not correspond to the selected version.*

## PACKAGING:WEIGHTS AND VOLUMES

### SKEMA Gross weight

30.2 kg

### Net weight

26.7 kg

### Volumes

0.18 m<sup>3</sup>

### Packaging size

Length

1420 mm

Height

190 mm

Depth

670 mm

### REMOTE MOTOR Remote under-roof motor 1300 m<sup>3</sup>/h

### Gross weight

15 kg

### Net weight

13.5 kg

### Volumes

0.09 m<sup>3</sup>

### Packaging size

Length

530 mm

Height

440 mm

Depth

380 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

30 W

### Voltage

220-240V

### Frequency


50-60Hz

### Plug type

Shuko

### ENERGY CLASS

0

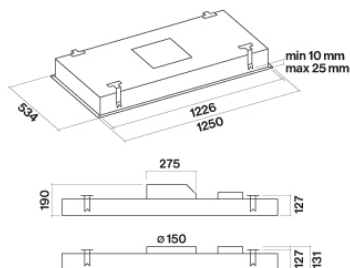

*Hood dimensions with under-roof motor (optional flange)*