

## CONCORDE

### Versiune

Perete 90 cm - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122305271



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

Inox AISI 304 Scotch Brite  
Aspiratie perimetrala  
Control electronic  
Iluminare cu LED  
Filtru de grasime metalic,  
detasabil si lavabil  
Filtru de carbon inclus

## ACCESORII OPTIONALE

### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h

### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### KACL.815

Lavete pentru curatare inox  
(cutie 10 buc)

## CARACTERISTICI TEHNICE

**Tip de instalare**  
De perete  
**Dimensiuni**  
90 cm  
**Finisaj**  
Inox Scotch Brite (AISI 304)  
**Motor**  
800 m<sup>3</sup>/h  
**Tipul panoului de control**  
Control electronic  
**Setari de viteza**  
4  
**Iluminare**  
LED 2x1,2 W - 3200 K  
**Filtru**  
Filtru metalic "Base" - 235x245 mm  
**Filtru de Carbon**  
Filtru de carbon rectangular -  
Tip 3 (inclus)  
**Distanta minima**  
Plita cu gaz: 60 cm  
Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

### Greutate bruta

27 kg

### Greutate neta

22 kg

### Volum

0.36 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

995 mm

Inaltime

600 mm

Adancime

595 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

280 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

670 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)


500 Pa

### Putere maxima motor

215 W

## CLASA DE ENERGIE

B



## CONCORDE

### Versiune

Perete 90 cm - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122305271

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m <sup>3</sup> /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE



## CONCORDE

### Versiune

Perete 90 cm - 800 m<sup>3</sup>/h


### Colectie

Design

### Cod EAN

8034122305271

## ETICHETA DE ENERGIE

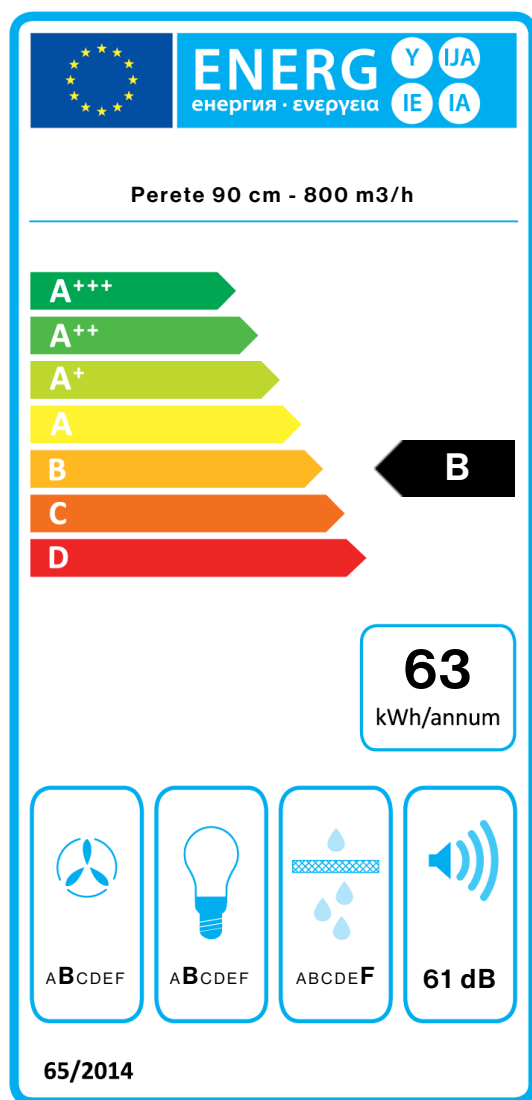

PF		
S	Falmec Spa	
M	Perete 90 cm - 800 m <sup>3</sup> /h	
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	63,5	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	61	dBa