

RIALTO TOP

Versiune

Perete 55 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122333847



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox FASTEEL (anti-amprente)
Scotch Brite si laturile cu finisaj satinat negru
Control electronic
Iluminare ambientala cu LED
Iluminare cu LED
Filtru de grasime Top, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

CARACTERISTICI TEHNICE

Tip de instalare

De perete

Dimensiuni

55 cm

Finisaj

Inox FASTEEL (anti-amprente)
Scotch brite si laturile cu finisaj satinat negru

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

LED 2x1,2 W - 3200 K

Lumina ambientala

Banda cu LED 2x2 W (5500 K)

Filtru metalic "Top" - 279x139 mm

Filtru

2 x Filtru metalic "Top" - 235x245 mm

Filtru de Carbon

Filtru de carbon rotund Ø170 mm - Tip 6 (inclus)

Distanta minima

Plita cu gaz: 50 cm

Plita electrica: 50 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

29 kg

Greutate neta

23 kg

Volum

0.36 m³

Dimensiuni ambalaj

Lungime

1090 mm

Inaltime

520 mm

Adancime

630 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

720 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)



520 Pa

Putere maxima motor

228 W

CLASA DE ENERGIE

B



RIALTO TOP

Versiune

Perete 55 cm - 800 m³/h

Colectie

Fasteel


Cod EAN

8034122333847

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	54	59	67
Capacitate (m ³ /h) I.E.C.61591	280	370	480	720
Presiune maxima (Pa)	400	450	480	520
Putere motor (W)	134	156	180	228
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

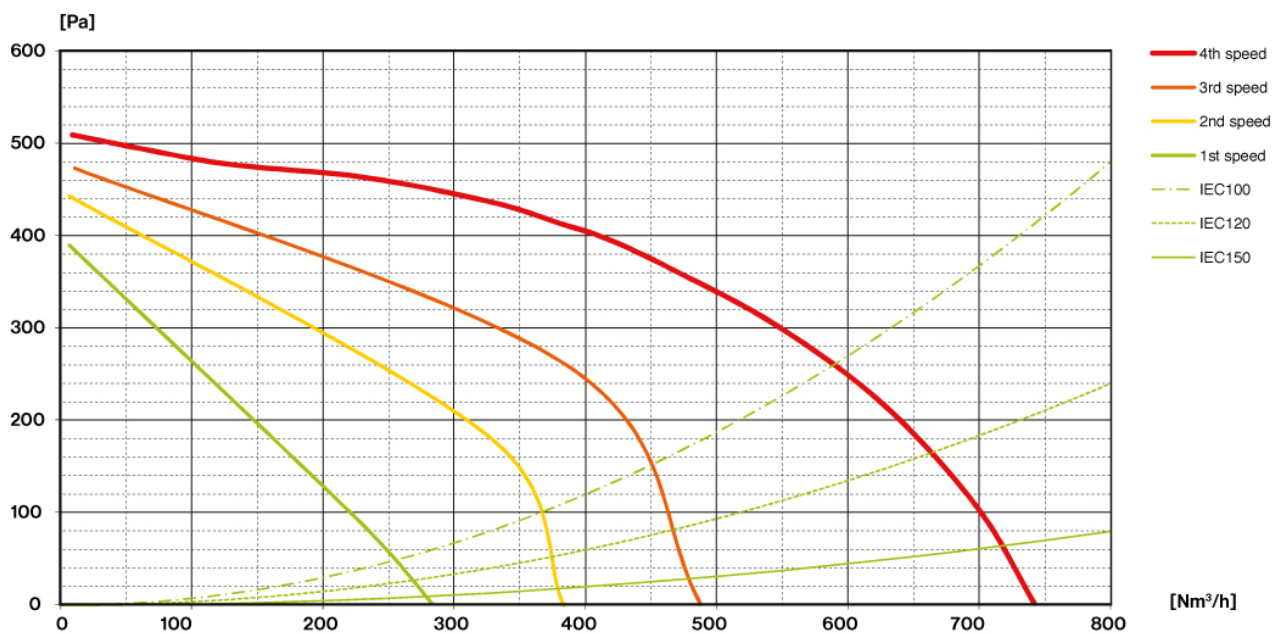

RIALTO TOP

Versiune

Perete 55 cm - 800 m³/h


Colectie

Fasteel

Cod EAN

8034122333847

ETICHETA DE ENERGIE

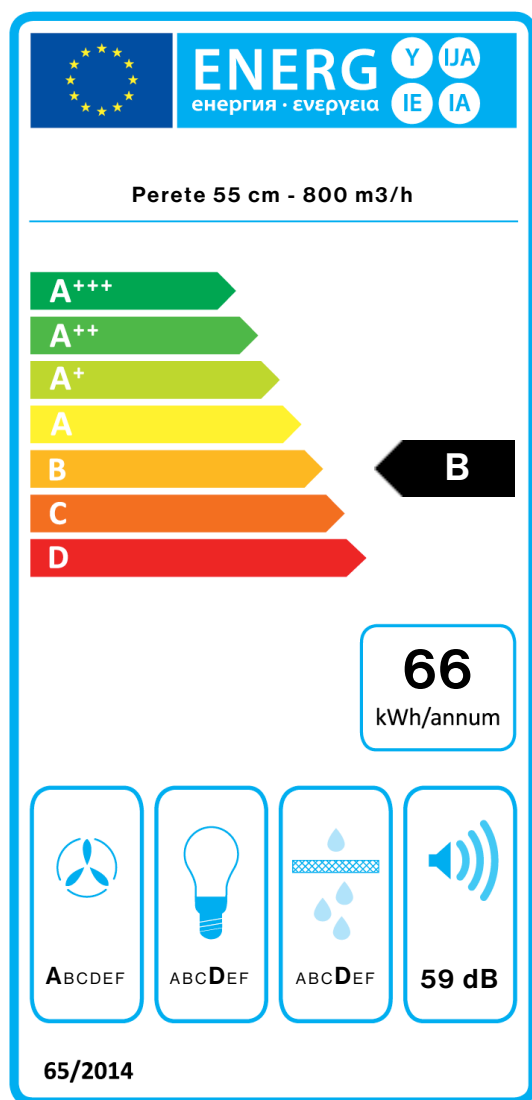

PF		
S	Falmec Spa	
M	Perete 55 cm - 800 m ³ /h	
AEC	65,5	kWh/a
EEC	B	
FDE	28,2	
FDEC	A	
LE	12,1	
LEC	D	
GFE	70,0	
GFEC	D	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	720,0	m ³ /h
SPEmin	49	dBa
SPEmax	59	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	59,8	
Qbep	417,0	m ³ /h
Pbep	397	Pa
Qboost	720,0	m ³ /h
Wbep	163,0	W
WL	8,20	W
Emiddle	99	lex
Lwa-SPEmax	59	dBa