

## RIALTO

### Version

Wall 55 cm - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122333823



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Stainless steel with black satin finishing sides**

**Electronic control**

**LED lighting**

**Top filter, removable and washable**

**Charcoal filter included**

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

55 cm

### Finishing

Stainless steel with black satin finishing sides

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

Metallic filter "Top" - 279x139 mm

### Filter

2 x Metallic filter "Top" - 235x245 mm

### Charcoal filter

Round charcoal filter Ø170 mm - Type 6 (included)

### Minimum distance

Gas hob: 50 cm

Electric hob: 50 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

29 kg

### Net weight

23 kg

### Volumes

0.36 m<sup>3</sup>

### Packaging size

Length

1090 mm

Height

520 mm

Depth

630 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

720 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)



520 Pa

### Max. motor power

228 W

## ENERGY CLASS

B



## RIALTO

### Version

Wall 55 cm - 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122333823

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	54	59	67
Capacity (m <sup>3</sup> /h) I.E.C.61591	280	370	480	720
Maximum pressure (Pa)	400	450	480	520
Motor Power (W)	134	156	180	228
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

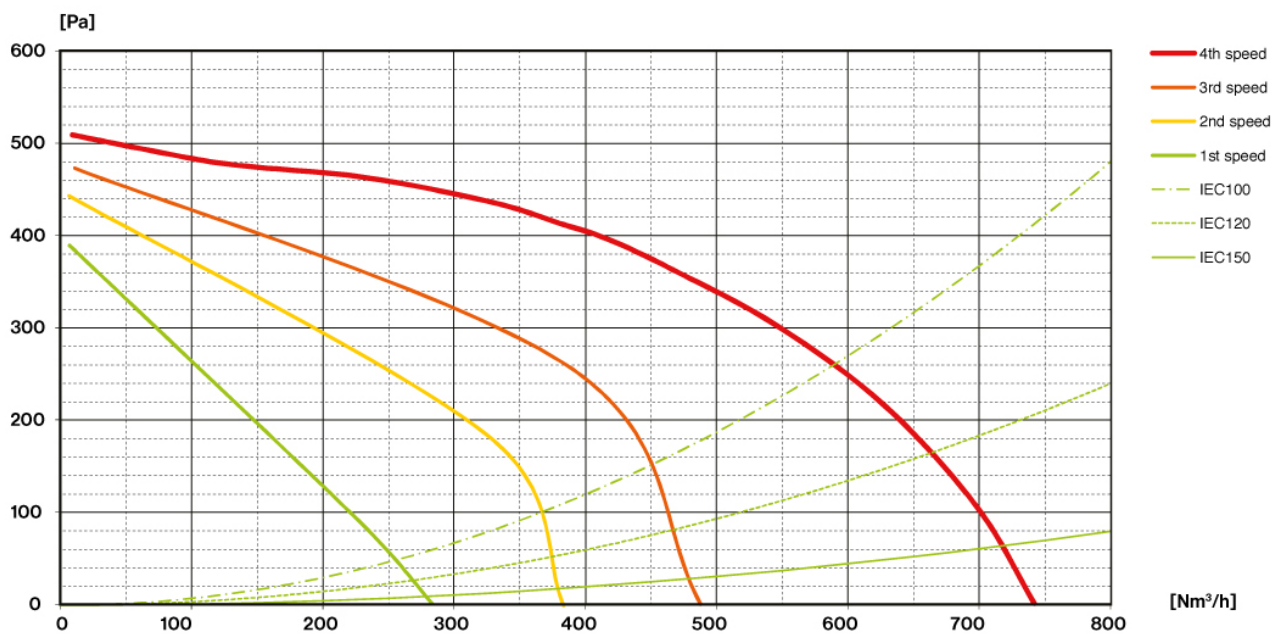

## RIALTO

### Version

Wall 55 cm - 800 m3/h


### Collection

Design+

### EAN code

8034122333823

## ENERGY LABEL

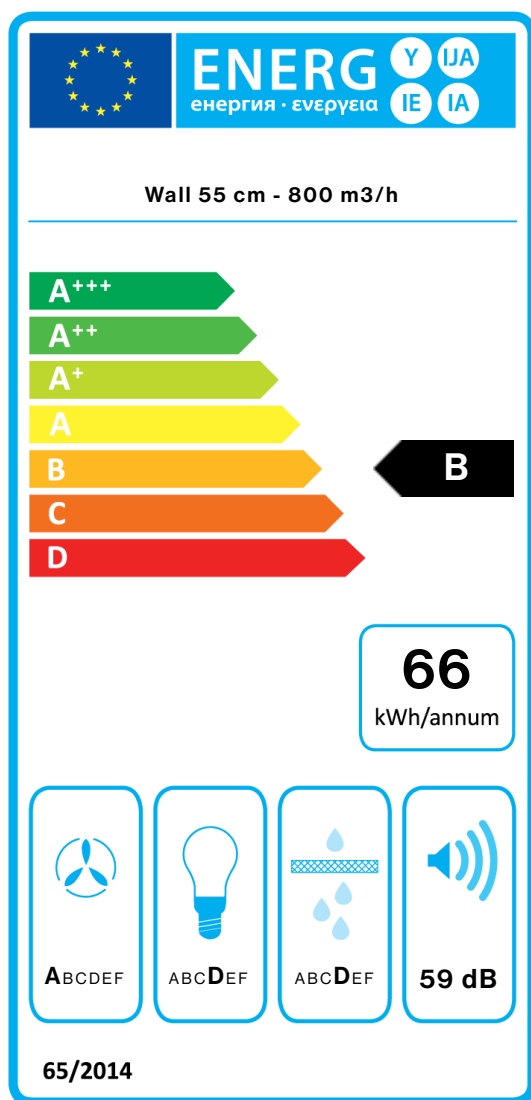

PF		
S	Falmec Spa	
M	Wall 55 cm - 800 m3/h	
AEC	65,5	kWh/a
EEC	B	
FDE	28,2	
FDEC	A	
LE	12,1	
LEC	D	
GFE	70,0	
GFEC	D	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	720,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	59	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	59,8	
Qbep	417,0	m <sup>3</sup> /h
Pbep	397	Pa
Qboost	720,0	m <sup>3</sup> /h
Wbep	163,0	W
WL	8,20	W
Emiddle	99	lex
Lwa-SPEmax	59	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.