

NUBE

Slim motor 800 m³/h

Design+

8034122363226



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Combined regenerable
Carbon.Zeo filter (optional)
Remote control included
Motor sold separately
Dialogue system

OPTIONAL ACCESSORIES

KACL.396
Flange - Ø200
KACL.398
Ø150 - Flange
KACL.770#41F
Remote under-roof 1100 m³/h
Brushless
KACL.782#49F
Slim motor 800 m³/h
KACL.786#41F
Outdoor extractor fan 1000 m³/h
KACL.789
Junction for ceiling hoods
KACL.796#4AF
Outdoor extractor fan 1500 m³/h
KACL.797#4AF
Remote under-roof motor 1300 m³/h
KACL.798#41F
Remote under-roof motor 950 m³/h
KACL.928
Filters spare
KACL.931
Filters Carbon.Zeo - Spare
KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)
KACL.953#BF
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

Installation type
Lubos
Dimensions
90 cm
Finishing
Painted white steel
Type of control
Electronic control
Speed settings
3 + boost
Lighting
No lighting
Filter
3 x Metallic filter "Base" - 290x267 mm

: 150 cm
: 150 cm

PACKAGING: WEIGHTS AND VOLUMES


NUBE
25.6 kg
22.8 kg
0.14 m³
1120 mm
190 mm
670 mm
Slim motor 800 m³/h
6.5 kg
5.2 kg
0.04 m³
575 mm
195 mm
395 mm

CONSUMPTION AND CONNECTION FEATURES

220-240V
50-60Hz

MOTOR TECHNICAL SHEET

540 m³/h
I.E.C. 61591
66 dB(A)re1pW
I.E.C.60704-2-13
600 Pa
150 W
B



Nube 90 - slim motor

NUBE


Slim motor 800 m³/h

Design+

8034122363226

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
dB(A) _{re1pW} - I.E.C.60704-2-13	52	58	63	66
(m ³ /h) I.E.C.61591	245	350	470	540
	400	480	530	600
	100	110	120	150
	220x90	220x90	220x90	220x90

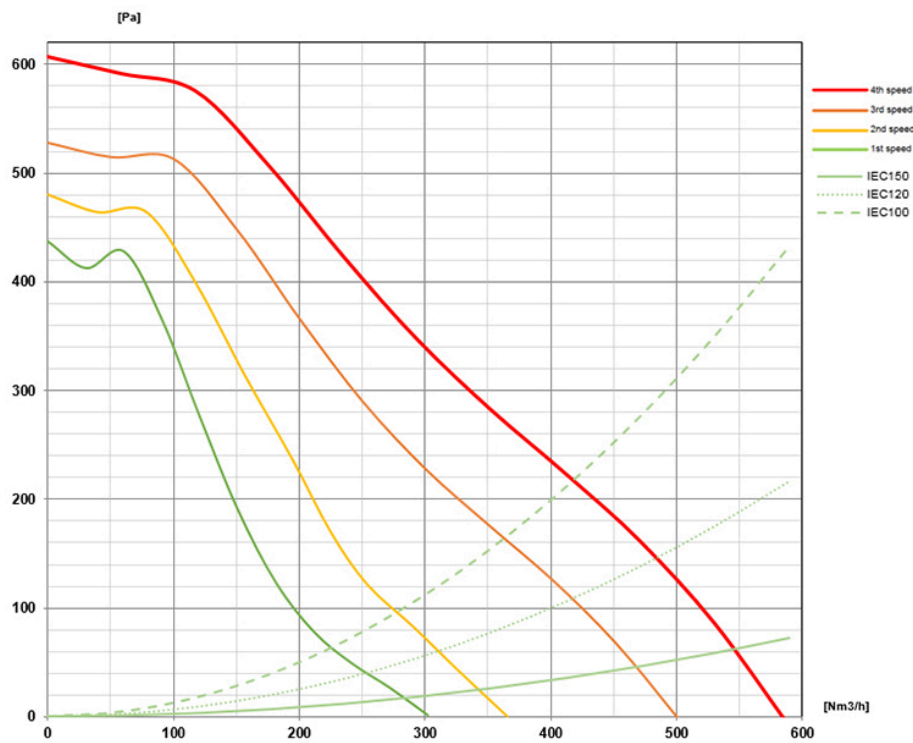


NUBE

Slim motor 800 m³/h

Design+

8034122363226

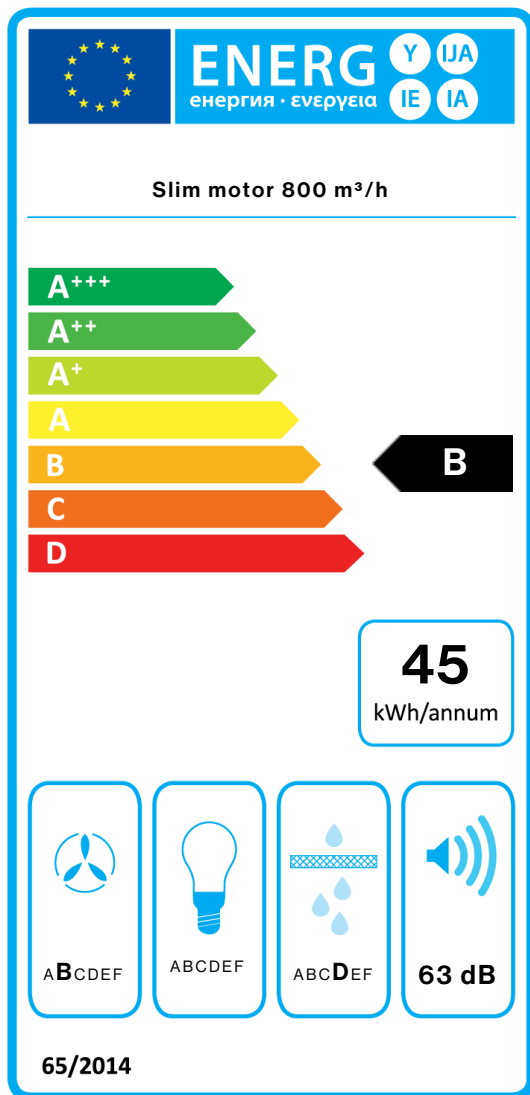

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	45,4	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	245,0	m³/h
Qmax	470,0	m³/h
Qboost	540,0	m³/h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEL	58,6	
Qbep	332,0	m³/h
Pbep	297	Pa
Qboost	540,0	m³/h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.