

## NUBE

### Versiune

Slim motor 800 m<sup>3</sup>/h

### Colectie

Design+

### Cod EAN

8034122363226



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

**Aspiratie perimetrala**  
**Control electronic**  
**Filtru de grasime metalic, detasabil si lavabil**  
**Optional - filtru combinat Carbon.Zeo, regenerabil**  
**Telecomanda inclusa**  
**Motor sold separat**  
**Dialogue system cu mod automat**

## ACCESORII OPTIONALE

### KACL.396

Ø200 - Flansa de prindere

### KACL.398

Ø150 - Flange

### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h  
Brushless

### KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h

### KACL.789

Junction for ceiling hoods

### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### KACL.928

Filtre de schimb

### KACL.931

### KACL.939#BF

Kit de filtrare pentru verisunea recirculare in plafon (doar pentru Motorul Slim)

### KACL.953#BF

Carbon.Zeo vertical outlet ceiling filter unit kit

## CARACTERISTICI TEHNICE

### Tip de instalare

De plafon

### Dimensiuni

90 cm

### Finisaj

Inox vopsit alb

### Tipul panoului de control

Control electronic

### Setari de viteza

3 + boost

### Iluminare

No lighting

### Filtru

3 x Filtru metalic "Base" - 290x267 mm

Plita cu gaz: 150 cm

Plita electrica: 150 cm

## AMBALARE: GREUTATE SI VOLUM

### NUBE Greutate bruta

25.6 kg

### Greutate neta

22.8 kg

### Volum

0.14 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

1120 mm

Inaltime

190 mm

Adancime

670 mm

### TELECOMANDA Slim motor

800 m<sup>3</sup>/h Greutate bruta

6.5 kg

### Greutate neta

5.2 kg

### Volum

0.04 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

575 mm

Inaltime

195 mm

Adancime

395 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Curent

220-240V

### Frecventa

50-60Hz

## FISA TEHNICA MOTOR

### Capacitate maxima

540 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

66 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)


600 Pa

### Putere maxima motor

150 W

## CLASA DE ENERGIE

B



*Nube 90 - slim motor*

## NUBE

### Versiune

Slim motor 800 m<sup>3</sup>/h

### Colectie

Design+


### Cod EAN

8034122363226

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacitate (m <sup>3</sup> /h) I.E.C.61591	245	350	470	540
Presiune maxima (Pa)	400	480	530	600
Putere (W)	100	110	120	150
Evacuare aer	220x90	220x90	220x90	220x90

## CAPACITATE/ PRESIUNE

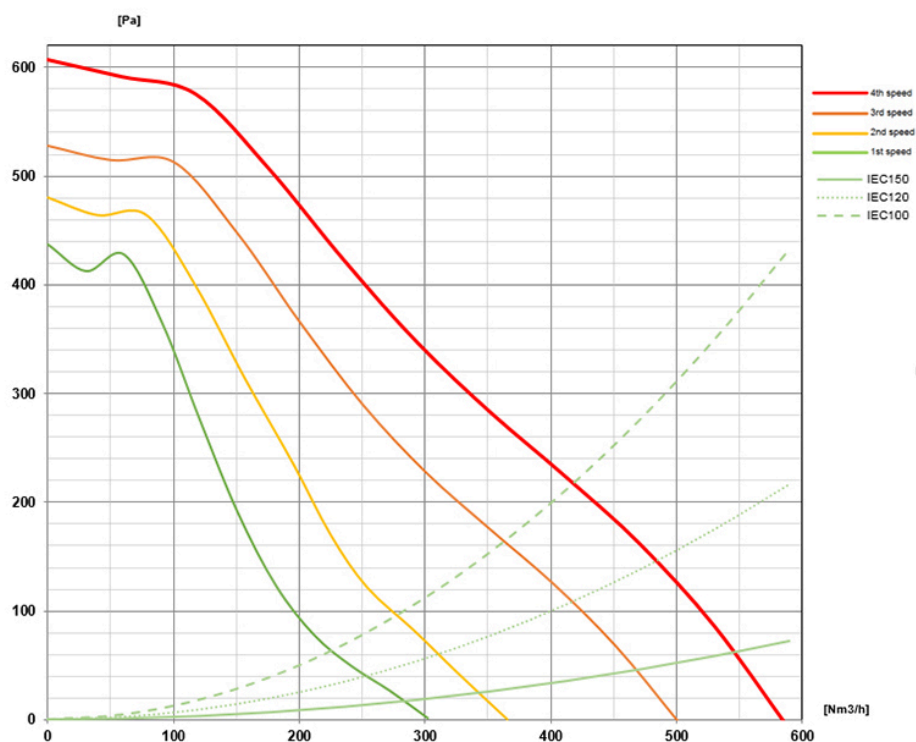

## NUBE

### Versiune

Slim motor 800 m<sup>3</sup>/h


### Colectie

Design+

### Cod EAN

8034122363226

## ETICHETA DE ENERGIE

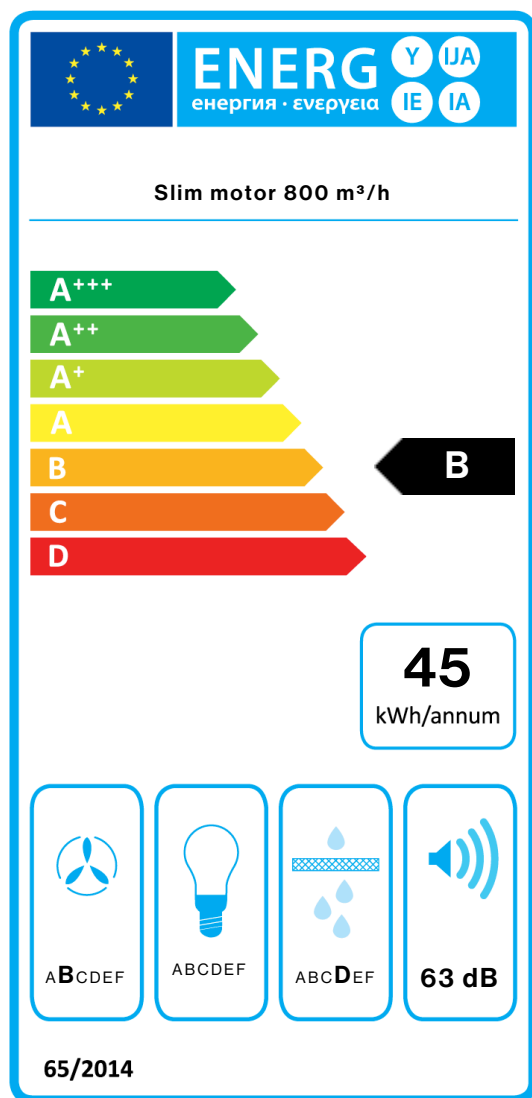

PF		
S	Falmec Spa	
M	Slim motor 800 m <sup>3</sup> /h	
AEC	45,4	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	245,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	540,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	58,6	
Qbep	332,0	m <sup>3</sup> /h
Pbep	297	Pa
Qboost	540,0	m <sup>3</sup> /h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.