

NUBE

Version

Remote under-roof motor 950 m³/h

Collection

Design+

EAN code

8034122363233



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Remote control included
Motor sold separately

Cut-out size: 505 x 940 mm

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.928
Filters spare

KACL.931
Filters Carbon.Zeo - Spare

KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)

KACL.953#BF
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

Installation type
Ceiling

Dimensions
90 cm

Finishing
Scotch brite stainless steel (AISI 304)

Type of control
Electronic control

Speed settings
4

Filter
3 x Metallic filter "Base" - 290x267 mm

Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

NUBE Gross weight
25.6 kg

Net weight
22.8 kg

Volumes
0.14 m³

Packaging size
Length
1120 mm
Height
190 mm
Depth
670 mm

REMOTE MOTOR Remote under-roof motor 950 m³/h

Gross weight
10 kg

Net weight
9 kg

Volumes
0.06 m³

Packaging size
Length
435 mm
Height
340 mm
Depth
385 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage
220-240V

Frequency
50-60Hz

Plug type
Shuko

MOTOR TECHNICAL SHEET


Maximum capacity
695 m³/h
I.E.C. 61591

Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
590 Pa

Max. motor power
270 W

ENERGY CLASS
B



Nube 90 - under roof motor

NUBE

Version

Remote under-roof motor 950
m³/h

Collection

Design+


EAN code

8034122363233

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 | 4 |
|---|-----|-----|-----|-----|
| Noise level dB(A)re1pW-I.E.C.60704-2-13 | 48 | 56 | 62 | 66 |
| Capacity (m ³ /h) I.E.C.61591 | 369 | 480 | 600 | 695 |
| Maximum pressure (Pa) | 510 | 520 | 560 | 590 |
| Motor Power (W) | 190 | 220 | 250 | 270 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

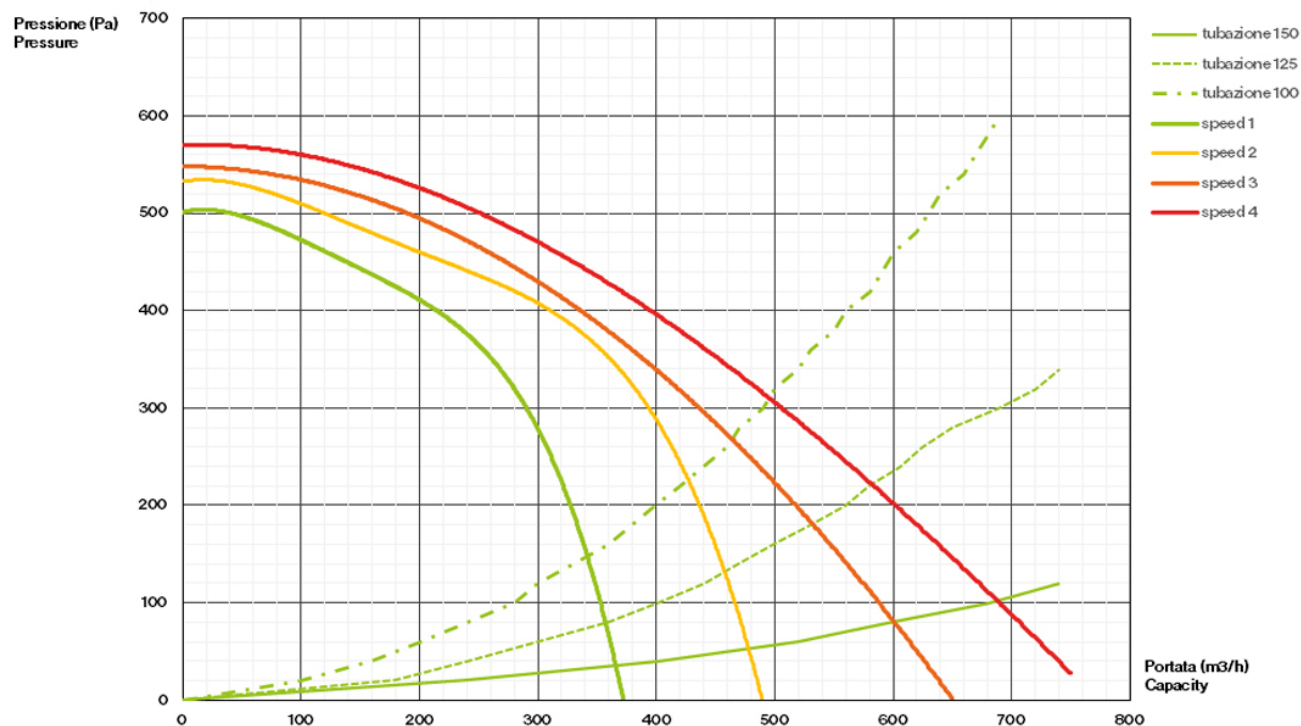

NUBE

Version

Remote under-roof motor 950
m³/h


Collection

Design+

EAN code

8034122363233

ENERGY LABEL

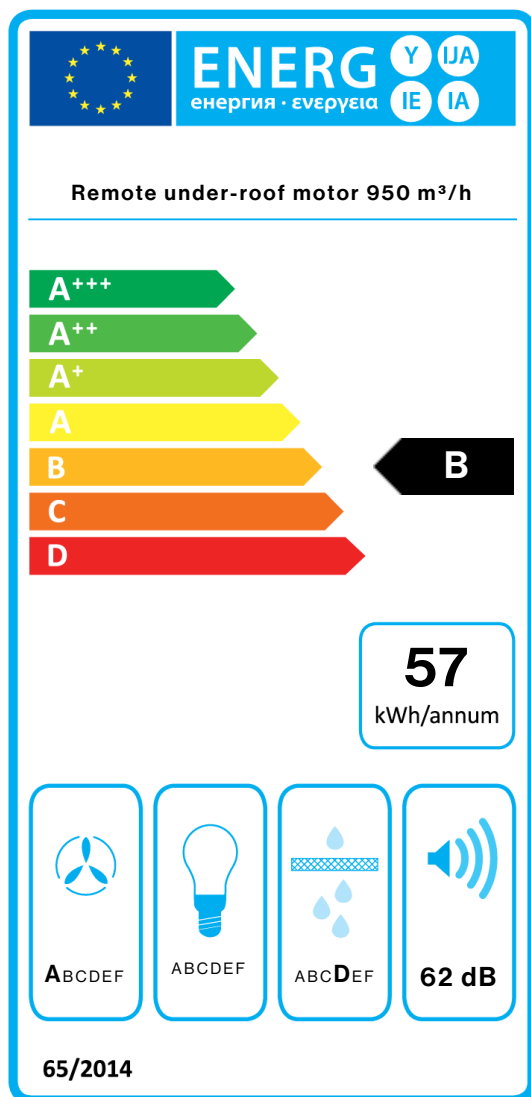

| PF | | |
|------------|---|-------------------|
| S | Falmec Spa | |
| M | Remote under-roof motor 950 m ³ /h | |
| AEC | 57,3 | kWh/a |
| EEC | B | |
| FDE | 28,1 | |
| FDEC | A | |
| LE | 0,0 | |
| LEC | 0 | |
| GFE | 65,1 | |
| GFEC | D | |
| Qmin | 365,0 | m ³ /h |
| Qmax | 600,0 | m ³ /h |
| Qboost | 695,0 | m ³ /h |
| SPEmin | 48 | dBa |
| SPEmax | 62 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1 | |
| EEl | 543,0 | |
| Qbep | 384,0 | m ³ /h |
| Pbep | 414 | Pa |
| Qboost | 695,0 | m ³ /h |
| Wbep | 157,0 | W |
| WL | 0,00 | W |
| Emiddle | 0 | lex |
| Lwa-SPEmax | 62 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.