

## NUVOLA 140

Slim motor 800 m<sup>3</sup>/h

Design+

8034122363172



*The photograph is purely for information  
It may not correspond to the selected version.*

### FEATURES

**Perimeter suction**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Combined regenerable Carbon.Zeo filter (optional)**  
**Remote control included**  
**Dimmable led lighting**  
**Dynamic LED Light**  
**Motor sold separately**  
**Dialogue system**

### OPTIONAL ACCESSORIES

**KACL.396**  
Flange - Ø200  
**KACL.398**  
Ø150 - Flange  
**KACL.704#4AF**  
Remote roof motor 1500 m<sup>3</sup>/h  
**KACL.770#41F**  
Remote under-roof 1100 m<sup>3</sup>/h  
Brushless  
**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h  
**KACL.786#41F**  
Outdoor extractor fan 1000 m<sup>3</sup>/h  
**KACL.789**  
Junction for ceiling hoods  
**KACL.796#4AF**  
Outdoor extractor fan 1500 m<sup>3</sup>/h  
**KACL.797#4AF**  
Remote under-roof motor 1300 m<sup>3</sup>/h  
**KACL.798#41F**  
Remote under-roof motor 950 m<sup>3</sup>/h  
**KACL.928**  
Filters spare  
**KACL.931**  
Filters Carbon.Zeo - Spare  
**KACL.939#BF**  
Ceiling re-circulation filtering kit (only for Slim Motor)  
**KACL.953#BF**  
Carbon.Zeo vertical outlet ceiling filter unit kit

### TECHNICAL FEATURES

**Installation type**  
Lubos  
**Dimensions**  
140 cm  
**Finishing**  
Painted white steel  
**Type of control**  
Electronic control  
**Speed settings**  
3 + boost  
**Lighting**  
Strip Led - 2700 K / 5600 K  
**Filter**  
4 x Metallic filter "Base" - 290x267 mm

: 150 cm  
: 150 cm

### PACKAGING: WEIGHTS AND VOLUMES

#### NUVOLA 140

45.4 kg

40.1 kg

0.22 m<sup>3</sup>

1455 mm

210 mm

730 mm

Slim motor 800 m<sup>3</sup>/h

6.5 kg

5.2 kg

0.04 m<sup>3</sup>

575 mm

195 mm

395 mm

### CONSUMPTION AND CONNECTION FEATURES

50 W

220-240V

50-60Hz

Schuko

### MOTOR TECHNICAL SHEET

540 m<sup>3</sup>/h

I.E.C. 61591

66 dB(A)re1pW

I.E.C.60704-2-13

600 Pa

150 W


C

## NUVOLA 140

Slim motor 800 m<sup>3</sup>/h

Design+

8034122363172



*Nuvola Led 140 - slim motor*

## NUVOLA 140


Slim motor 800 m<sup>3</sup>/h

Design+

8034122363172

### MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
dB(A) <sub>re1pW</sub> - I.E.C.60704-2-13	52	58	63	66
(m <sup>3</sup> /h) I.E.C.61591	245	350	470	540
	400	480	530	600
	100	110	120	150
	220x90	220x90	220x90	220x90

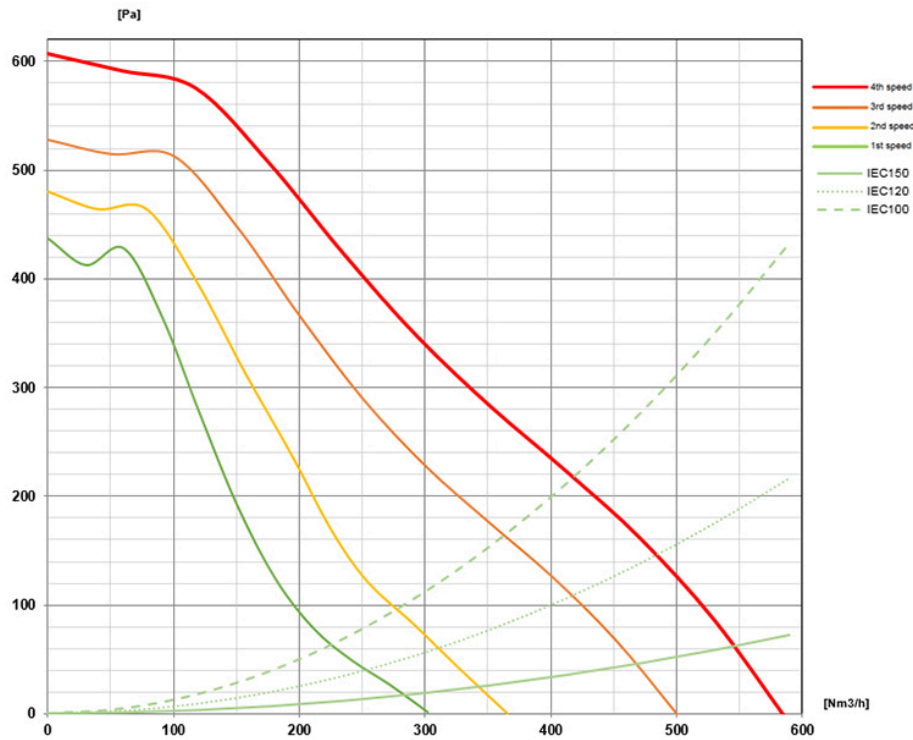


## NUVOLA 140

Slim motor 800 m³/h

Design+

8034122363172

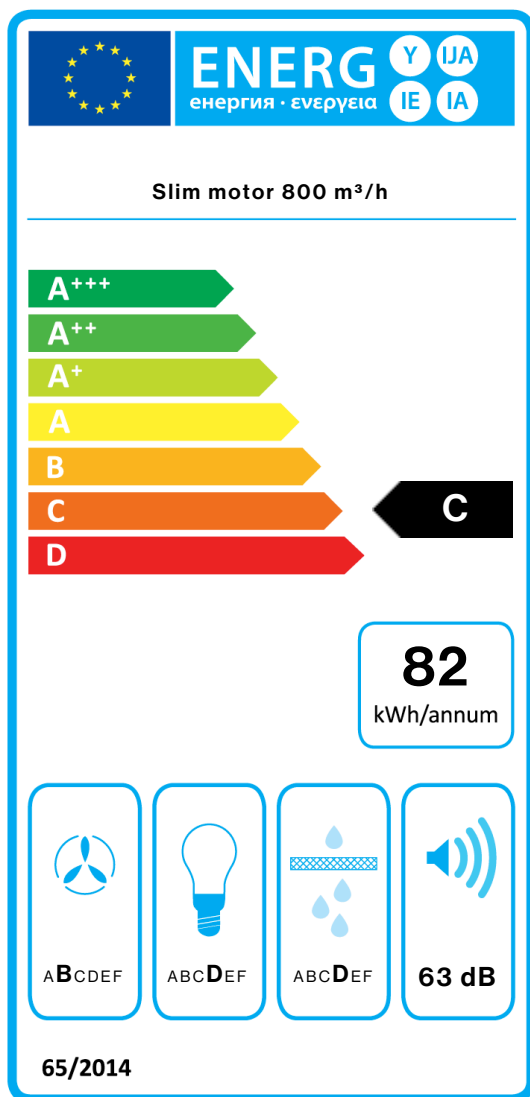

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	81,9	kWh/a
EEC	C	
FDE	24,2	
FDEC	B	
LE	14,1	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	245,0	m³/h
Qmax	470,0	m³/h
Qboost	540,0	m³/h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEL	78,0	
Qbep	332,0	m³/h
Pbep	297	Pa
Qboost	540,0	m³/h
Wbep	113,0	W
WL	50,00	W
Emiddle	705	lux
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.