

SIRIO

Version

Slim motor 800 m³/h

Collection

Design+

EAN code

8034122363240



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Combined regenerable
Carbon.Zeo filter (optional)
Remote control included
Dynamic Light (2700K - 5600K)
Motor sold separately
Dialogue system with auto mode

OPTIONAL ACCESSORIES

KACL.1049
Carbon.Zeo Microtech regenerable filter for ceiling hoods up to 100 cm

KACL.396
Flange - Ø200

KACL.398
Flange - Ø150

KACL.770#41F
Remote under-roof 1100 m³/h
Brushless

KACL.782#49F
Slim motor 800 m³/h

KACL.786#41F
Outdoor extractor fan 1000 m³/h

KACL.789
Junction for ceiling hoods

KACL.796#4AF
Outdoor extractor fan 1500 m³/h

KACL.797#4AF
Remote under-roof motor 1300 m³/h

KACL.798#41F
Remote under-roof motor 950 m³/h

KACL.928
Filters spare

KACL.931
Filters Carbon.Zeo - Spare

KACL.939#BF
Ceiling re-circulation filtering kit (only for Slim Motor)

KACL.953#BF
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

Installation type
Ceiling

Dimensions
90 cm

Finishing
White tempered glass

Type of control
Electronic control

Speed
3 + boost

Lighting
Led 4x3,6 W - 2700 K / 5600 K

Filter
3 x Metallic filter "Base" - 290x326 mm

Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

SIRIO Gross weight
29.2 kg

Net weight
26.5 kg

Volumes
0.14 m³

Packaging size

Length
1120 mm

Height
190 mm

Depth
670 mm

REMOTE MOTOR Slim motor

800 m³/h Gross weight
6.5 kg

Net weight
5.2 kg

Volumes
0.04 m³

Packaging size

Length
575 mm

Height
195 mm

Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
13 W

Voltage
220-240V

Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
540 m³/h
I.E.C. 61591

Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
600 Pa

Max. motor power
150 W

ENERGY CLASS
B

SIRIO

Version


Slim motor 800 m³/h

Collection

Design+

EAN code

8034122363240



Sirio 90 - slim motor

SIRIO

Version

Slim motor 800 m³/h

Collection

Design+


EAN code

8034122363240

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m ³ /h) I.E.C.61591	245	350	470	540
Maximum pressure (Pa)	400	480	530	600
Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

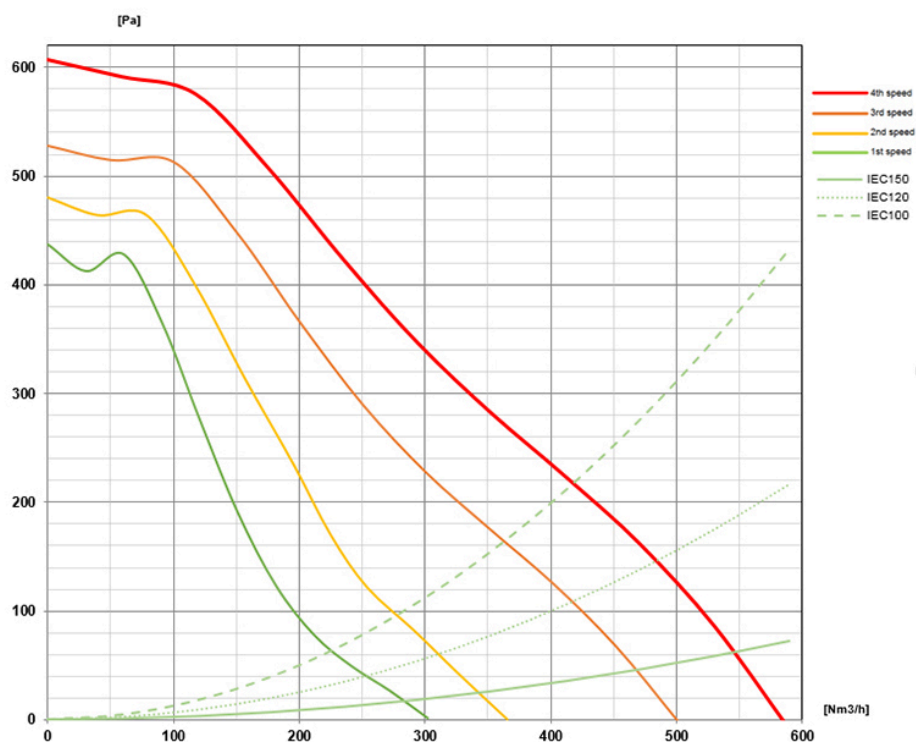

SIRIO

Version

Slim motor 800 m³/h


Collection

Design+

EAN code

8034122363240

ENERGY LABEL

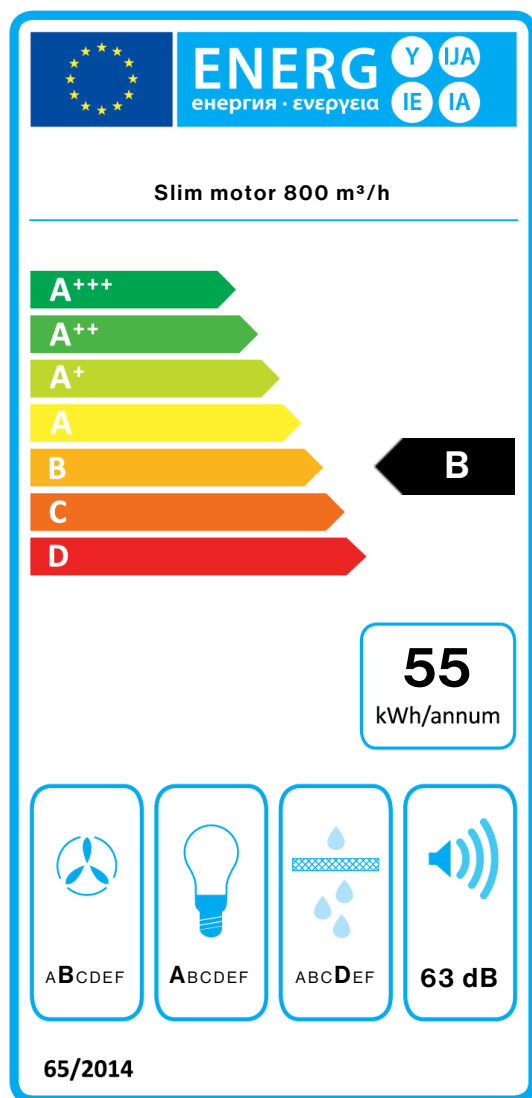

PF		
S	Falmec Spa	
M	Slim motor 800 m ³ /h	
AEC	55,2	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	29,1	
LEC	A	
GFE	65,1	
GFEC	D	
Qmin	245,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	540,0	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	65,0	
Qbep	332,0	m ³ /h
Pbep	297	Pa
Qboost	540,0	m ³ /h
Wbep	113,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.