

TAB

**Version**  
Wall 60 cm - Grey - 800 m3/h

**Designer**

**Collection**  
Design

**EAN code**  
8034122352084

FEATURES

- Chrome edge
- Electronic control
- LED lighting on body and door
- Top filter, removable and washable
- Charcoal filter included
- Possible to duct wall mounted from rear
- Optional Chimney

RAL 7032 / Matt grey  
The RAL codes have to be considered indicative since production process and materials may alter the colors.

**OPTIONAL ACCESSORIES**

- KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless
- KACL.786#41F**  
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**  
Remote under-roof motor 1300 m3/h
- KACL.798#41F**  
Remote under-roof motor 950 m3/h
- KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)
- KCTCN.001#B**  
KIT CHIMNEY TAB 60-80 NOR. WHITE
- KCTCN.001#I**  
KIT CHIMNEY TAB 60-80 NOR. STAINLESS STEEL
- KCTCN.001#N**  
KIT CHIMNEY TAB 60-80 NOR. BLACK

TECHNICAL FEATURES

- Installation type**  
Wall
- Dimensions**  
60 cm
- Finishing**  
Colored opening frontal  
Chrome edge
- Motor**  
800 m³/h
- Type of control**  
Electronic control
- Speed settings**  
4
- Lighting**  
Led 4x1,2 W - 3200 K
- Filter**  
Metallic filter "Top" - Tab 60
- Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6 (included)
- Minimum distance**  
Gas hob: 55 cm  
Electric hob: 52 cm



The photograph is purely for information  
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight**  
20 kg
- Net weight**  
17 kg
- Volumes**  
0.2 m³
- Packaging size**  
Length  
710 mm  
Height  
480 mm  
Depth  
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**  
280 W
- Voltage**  
220-240V
- Frequency**  
50-60Hz
- Plug type**  
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**  
750 m³/h  
I.E.C. 61591
- Maximum noise level**  
66 dB(A)re1pW  
I.E.C.60704-2-13
- Maximum pressure (Pa)**  
510 Pa
- Max. motor power**  
224 W
- ENERGY CLASS**  
A



TAB

Version  
Wall 60 cm - Grey - 800 m3/h

Designer


Collection  
Design

EAN code  
8034122352084

MOTOR TECHNICAL SHEET

| Motor speed                                            | 1   | 2   | 3   | 4   |
|--------------------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 46  | 53  | 58  | 66  |
| Capacity (m3/h)<br>I.E.C.61591                         | 295 | 390 | 500 | 750 |
| Maximum pressure (Pa)                                  | 390 | 440 | 490 | 510 |
| Motor Power (W)                                        | 130 | 150 | 178 | 224 |
| Air outlet                                             | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

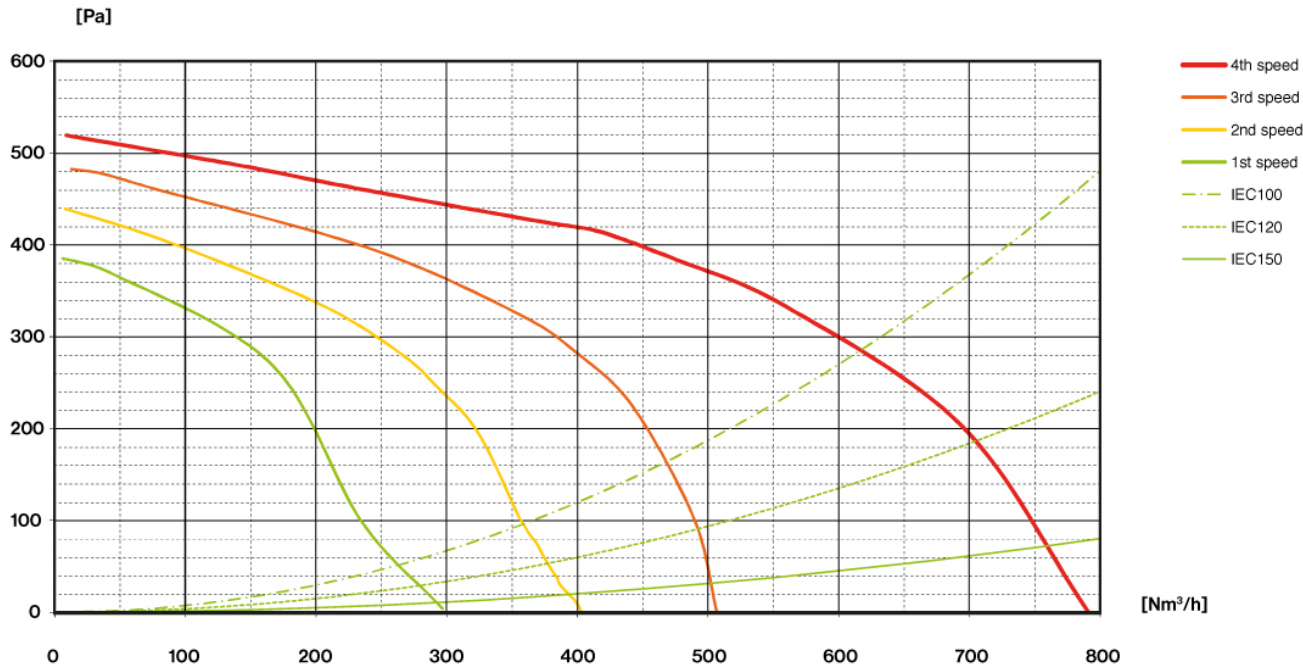

TAB


Version  
Wall 60 cm - Grey - 800 m3/h

Designer

Collection  
Design

EAN code  
8034122352084

ENERGY LABEL

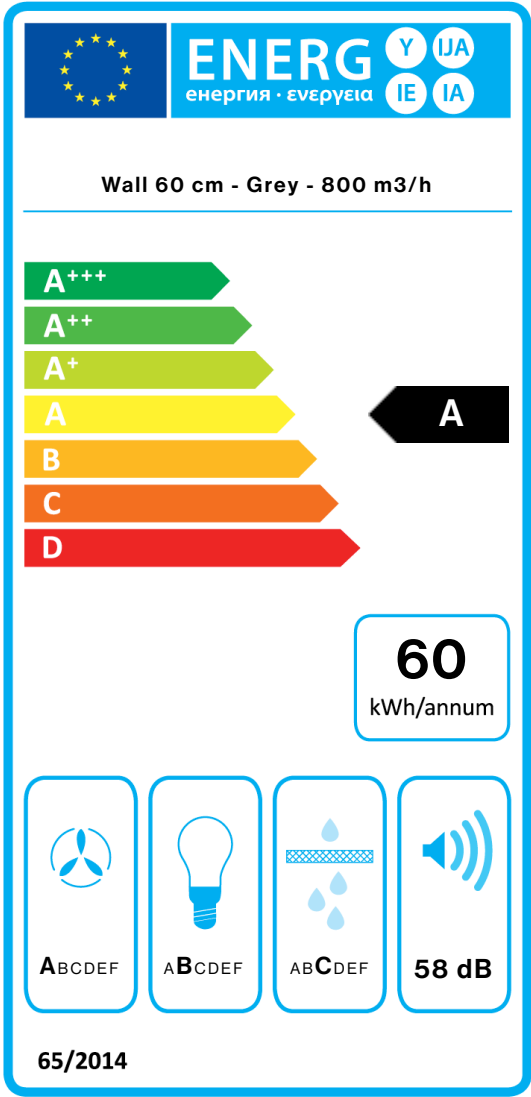

| PF         |                              |       |
|------------|------------------------------|-------|
| S          | Falmec Spa                   |       |
| M          | Wall 60 cm - Grey - 800 m3/h |       |
| AEC        | 60,2                         | kWh/a |
| EEC        | A                            |       |
| FDE        | 29,8                         |       |
| FDEC       | A                            |       |
| LE         | 24,9                         |       |
| LEC        | B                            |       |
| GFE        | 82,0                         |       |
| GFEC       | C                            |       |
| Qmin       | 295,0                        | m³/h  |
| Qmax       | 500,0                        | m³/h  |
| Qboost     | 750,0                        | m³/h  |
| SPEmin     | 46                           | dBa   |
| SPEmax     | 58                           | dBa   |
| SPEboost   | 66                           | dBa   |
| PO         | -                            | W     |
| PS         | 0,48                         | W     |
| PI         |                              |       |
| F          | 0.9                          |       |
| EEL        | 54,6                         |       |
| Qbep       | 432,0                        | m³/h  |
| Pbep       | 407                          | Pa    |
| Qboost     | 750,0                        | m³/h  |
| Wbep       | 164,0                        | W     |
| WL         | 8,60                         | W     |
| Emiddle    | 214                          | lux   |
| Lwa-SPEmax | 58                           | dBa   |

PF\_Product fiche according to 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). PI\_Additional information according to 66/2014 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.